



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



CAT 4900

Parflex Ultra High Pressure Thermoplastic
Hose, Fittings and Accessories



ENGINEERING YOUR SUCCESS.

Extra care is taken in the preparation of this literature but Parker is not responsible for any inadvertent typographical errors or omissions. Information subject to change without notice. The information in this catalog is only accurate as of the date of publication. For a more current information base, please consult the Parflex® Division web site at www.parker.com/pfd.



FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.


This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "Offer of Sale".

Welcome to The Parflex® Division



Manitowoc, WI
Fort Worth, TX
Stafford, TX
Monterrey, MX
Ravenna, OH
Randleman, NC

Our Charter

To be the global leader in engineered polymer-based products while providing system solutions for the conveyance and control of fluids.

As part of the Parker Fluid Connectors Group, the Parflex® Division is responsible for the design and manufacture of hoses and tubing to handle extreme applications. Products include thermoplastic and fluoropolymer hose and tubing, hose bundles, instrumentation tubing, harnesses and accessories.

The Parflex® Division includes the Ravenna division headquarters in Ohio, and manufacturing facilities in:

- Maniwoc, WI
- Fort Worth, TX
- Stafford, TX
- Randleman, NC
- Monterrey, Mexico

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



How to Use This Catalog

Table of Contents

For quick, easy listing of topics covered by section, reference the Table of Contents on pg. 2.

Information by Part Number

See the Part Number Index beginning on page F-49.

Information by Pressure

Reference the Pressure Selection Chart found at the beginning of the hose section in the catalog.

Information by Market









Reference the market information section, pgs. 9 - 19, for a visual index of hoses by market application.

The Parker Part Numbering System

The part numbering system for hose and fittings is explained in the introduction on pages 5-9.

International Symbols

An explanation of the symbols and their meaning used in the product tables can be found below.

| Symbol | Meaning | Symbol | Meaning | Symbol | Meaning |
|---|----------------------------|---|---------------------|---|----------|
| # | Part Number |  | Working Pressure |  | Hex Size |
|  | Hose Inner Diameter (I.D.) |  | Minimum Bend Radius |  | Diameter |
|  | Hose Outer Diameter (O.D.) |  | Thread Size |  | Weight |

ICON Identification Key

Hose markets/applications are identified using the following icons:



Oilfield Service



Waterblast



Hydraulic

Table of Contents

A Hose

| | | | |
|------------------------------------|-----|-----------------------------|------------|
| Why Thermoplastic? _____ | A-2 | Hose Selection Charts _____ | A-5 : A-10 |
| polyflex Hose Safety _____ | A-3 | Hoses by Series _____ | A-9 : A-68 |
| How to Read the Hose Section _____ | A-4 | | |

B Fittings

| | | | |
|--|-----------|-------------------------------|-------------|
| Hose Fitting Nomenclature _____ | B-2 | Hose Fittings by Series _____ | B-7 : B-62 |
| Hose Fitting Configuration Chart _____ | B-3 : B-5 | PolyflexLok _____ | B-63 : B-64 |
| How to Read the Fitting Section _____ | B-6 | | |

C Adapters and Valves

| | | | |
|---------------------------------------|-------------|--------------------------------|-------------|
| Part Number Nomenclature _____ | C-3 : C5 | NPT _____ | C-26 : C-41 |
| Type M _____ | C-6 : C-9 | JIC _____ | C-42 : C-45 |
| 20,000 PSI - Medium Pressure _____ | C-10 : C-19 | Valves — Medium Pressure _____ | C-46 : C-48 |
| 30,000/60,000 PSI High Pressure _____ | C-20 : C-25 | Valves — High Pressure _____ | C-49 : C-50 |

D Quick Couplings

| | |
|---|-------------|
| Quick Coupling Part Number Nomenclature _____ | D-2 : D-3 |
| Rogan Series—30,000 PSI Maximum Working Pressure _____ | D-4 : D-10 |
| C Series Hydraulic Couplers—29,800 PSI Maximum Working Pressure _____ | D-11 : D-17 |

E Accessories

| | | | |
|---|-----|-----------------------------------|-----|
| Heavy Duty Abrasion Cover _____ | E-2 | Support Grips _____ | E-3 |
| Heavy Duty Abrasion Cover Sleeves _____ | E-2 | Dies _____ | E-3 |
| Spring Guards _____ | E-2 | Warning Tags _____ | E-3 |
| Bend Restrictors _____ | E-2 | Pressure Containment Shield _____ | E-4 |
| Containment Grips _____ | E-3 | Anti-Gall Lubricant _____ | E-4 |

F General Technical

| | | | |
|--|------|---|------|
| Selection, Installation and Maintenance of polyflex Hose Assemblies _____ | F-2 | Recommended Tightening Procedures _____ | F-17 |
| Dash Sizes _____ | F-3 | Metric Conversion Chart _____ | F-18 |
| Installation Tips _____ | F-4 | Glossary _____ | F-19 |
| Selection of Hose Diameter from Flow Rate and Velocity _____ | F-5 | General Chemical Resistance Table _____ | F-20 |
| Pressure Drop _____ | F-6 | PFDE-ES29 _____ | F-24 |
| Permeability Coefficient _____ | F-16 | PFDE-ES28 _____ | F-29 |
| | | Twin/Multi-Line Separation Instructions _____ | F-42 |

| | |
|-------------------------|------|
| Safety Guide _____ | F-47 |
| Offer of Sale _____ | F-51 |
| Part Number Index _____ | F-53 |

Selecting the Right Hose

Choosing Your Hose

Before selecting hoses from Catalog 4900, it will be easier if you familiarize yourself with the basics of high pressure thermoplastic hoses. If you review the symbols on pg. 1 and the hose and fitting part number explanations on pages 5 & 6, you will have a foundation for selecting your hose. Also, the Hose Selection Charts (located at the beginning of Section A) will help pinpoint the hose you require. You can use the catalog to identify individual hoses by:

- Brief general description
- Specific size with corresponding working pressure
- Market application
- Core tube material
- Reinforcement/type of construction
- Cover material

For fittings, refer to the visual indexes in Section B.

General Construction

Construction standards may vary between specific thermoplastic hoses.

Specific braid materials, wire reinforcements, spiral reinforcements and distinguishing features are clearly called out with each hose product. Perforated and non-perforated hoses are available based on application.

Hoses are engineered and manufactured to appropriate burst pressure to working pressure ratios according to application. Never operate a hose beyond its published working pressure.





“STAMPED”

Size

The appropriate inside and outside diameters and length of the hose should be determined

Temperature

The ambient and/or maximum temperature of the material being conveyed

Application

External conditions including abrasion, climate, heat, flexing, crushing, kinking, and degrees of bending

Media

The composition of the substance being conveyed and chemical compatibility with the hose inner core and, if applicable, the outer cover

Pressure

The maximum pressure of the system, including pressure spikes

Ends

The appropriate end connection and attachment method for the application

Delivery

Testing, quality, packaging, and delivery requirements



For detailed ordering information, please consult price list or contact Parflex Division.

Hose & Fittings Part Numbers

Hose Part Number Build



2440N-16V30

2440

2440

2440

1. Reinforcement I

- 0 = No spiraling
- 1 = Two open spiralized layers
- 2 = Two closed spiralized layers
- 3 = Two closed spiralized layers two open spiralized layers
- 4 = Four closed spiralized layers
- 5 = Four closed spiralized layers (increased pressure)
- 6 = Six closed spiralized layers
- 7 = Six closed spiralized layers (increased pressure)
- 8 = Eight closed spiralized layers
- 9 = Eight closed spiralized layers (increased pressure)

2. Reinforcement II (If Reinforcement I ≠ 0)

- 1 = Synthetic fiber (not aramid)
- 2 = Aramid fiber
- 3 = Stainless steel wire
- 4 = Steel wire
- 5 = Iron wire
- 6 = Cord strand
- 7 = Steel wire and open spiralized synthetic yarn
- 8 = Steel wire and open spiralized cord strand
- 9 = Other construction

2. Reinforcement II (If Reinforcement I = 0)

- 0 = No braiding
- 1 = One braid of non-aramid fiber
- 2 = One braid of aramid fiber
- 3 = One braid of stainless steel wire
- 4 = One braid of steel wire
- 5 = One braid of iron wire
- 6 = One braid of iron wire, zinc-plated

3. Reinforcement III

- 0 = No braiding
- 1 = One braid of non-aramid fiber
- 2 = One braid of aramid fiber
- 3 = One braid of stainless steel wire
- 4 = One braid of steel wire
- 5 = One braid of iron wire
- 6 = One braid of iron wire, zinc-plated
- 7 = (open)
- 8 = Different pressure reinforcement

N-16

N-16

V30

V30

4. Core Material

- D = POM (Delrin)
- E = Ethylene tetrafluoroethylene (ETFE)
Ethylene chlorotrifluoroethylene (ECTFE)
- F = Fluorinated ethylene propylene (FEP)
- H = Thermoplastic Elastomer-Ether-Ester — Hytrel®*
- M = Mixture/co-extruded
- N = Polyamide (Nylon)
- P = Polyethylene (PE)
- S = Special material
- T = Polytetrafluoroethylene (PTFE)
- U = Thermoplastic polyurethanes (TPU)
- V = Polyvinylidene Fluoride (PVDF)

5. Hose Size (I.D.)

- 02 = 1/8" (3.2mm)
- 025 = 5/32" (4.0mm)
- 03 = 3/16" (4.8mm)
- 04 = 1/4" (6.4mm)
- 05 = 5/16" (7.9mm)
- 06 = 3/8" (6.4mm)
- 08 = 1/2" (12.7mm)
- 12 = 3/4" (19.0mm)
- 16 = 1" (25.4mm)
- 20 = 1-1/4" (31.8mm)
- 24 = 1-1/2" (38.1mm)
- 32 = 2" (50.8mm)
- 48 = 3" (76.0mm)

6. Cover Material

- 0 = Polyurethane (PUR)
- 1 = Polyurethane (PUR) - seawater-resistant
- 2 = PEE
- 3 = Polyamide (PA) - Nylon (6, 11, or 12)
- 4 = Polyethylene (PE)
- 8 = Extra thick

7. Cover Color

- 0 = Black
- 1 = Black (methanol-washed hose types)
- 2 = Blue
- 3 = Green
- 4 = Red
- 5 = Orange
- 6 = Yellow
- 7 = Gray
- 8 = Gold

*Registered trademark of DuPont™



For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

Fitting Part Number Build



6Y4LX-9-3C

6

1. Design Type

- 1 = German-designed end fitting
- 6 = US-designed end fitting
- 2 = Reusable style end fittings

Y4

2. Connection Type

- | | |
|--------------------------------------|---|
| 01 = NPT - Male | D9 = BSP Rigid - Male |
| 02 = NPT - Female | G2 = BSP Swivel 90° Elbow - Female |
| 06 = JIC 37° Flare - Female | 92 / BC = BSP Swivel - Female |
| 5Y = Medium Pressure Swivel - Female | 07 = NPS Swivel - Female |
| Y2 = Medium Pressure - Male | EZ = Waterblast Nozzle - Female |
| 6Y = High Pressure Swivel - Female | ZE = Waterblast Nozzle - Male |
| Y4 = High Pressure - Male | HY = Waterblast Nozzle - Female |
| RX = Reusable | YH = Waterblast Nozzle - Male |
| AY = Type "M" Swivel - Female | 3Z = Waterblast Nozzle - Male |
| YA = Type "M" Swivel - Male | HE = 2" Hammer Union, Cone w/ Wing Nut - Male |
| MB = STECKO | HN = 2" Hammer Union, Cone Threaded End w/ Seal- Female |
| C3 / C9 = METRIC Swivel - Female | TU = Tube Stub Fitting |

LX

3. Hose Series Designation

- 2X = 2840D, 2740D and 2640D Series Hoses
- 3X = 2022N Series Hoses
- 5X = All 2640 Series Hoses
- 8X = All 2244 and 2380 Series Hoses
- 9X = All 2300 Series Hoses
- AX = 2240D-025V34, 2245D-03V32 and 2243D-03V70
- BL = 2580N Series Hoses
- BS = 2388N Series Hoses
- CR = 57CR Series Hoses
- E2 = 2390N Series Hoses
- E3 = 2390N Series Hoses
- EX = 2020N Series Hoses
- HP = HP/HP8 Series Hoses
- HX = All 2740 Series Hoses
- KY = 2380N Series Hoses
- LX = All 2440 Series Hoses
- NX = 2240D-04 and 2300 Series Hoses
- PL = 2240D Series Hoses
- RX = 2020N-02V30 (Reusable Fittings)
- TX = 2240D and 2248D Series Hoses
- UX = 2448M Series Hoses
- WX = All 2840 Series Hoses

9

4. Connection Size

- | | |
|-----------------------|----------------------------|
| JIC / Type M | NPTF |
| 1 = 1/4" - 28 UNF | 1 = 1/16" - 27 |
| 2 = 5/16" - 24 UNF | 2 = 1/8" - 27 |
| 3 = 3/8" - 24 UNF | 4 = 1/4" - 18 |
| 4 = 7/16" - 20 UNF | 6 = 3/8" - 18 |
| 5 = 1/2" - 20 UNF | 8 = 1/2" - 14 |
| 6 = 9/16" - 18 UNF | 12 = 3/4" - 14 |
| 7 = 5/8" - 18 UNF | 16 = 1" - 11-1/2 |
| 8 = 3/4" - 16 UNF | 20 = 1-1/4" - 11-1/2 |
| 10 = 7/8" - 14 UNF | 24 = 1-1/2" - 11-1/2 |
| 11 = 1" - 12 UNF | 32 = 2" - 11-1/2 |
| 12 = 1-1/16" - 12 UNF | |
| 13 = 1-1/8" - 12 UNF | |
| 15 = 1-1/4" - 12 UNF | |
| 16 = 1-5/16" - 12 UNF | MP & HP Tube |
| 17 = 1-3/8" - 12 UNF | Sized by nominal tube O.D. |
| 19 = 1-1/2" - 12 UNF | 4 = 1/4" - 28 LH |
| 20 = 1-5/8" - 12 UNF | 6 = 3/8" - 24 LH |
| | 9 = 9/16" - 18 LH |
| | 12 = 3/4" - 16 LH |
| | 16 = 1" - 14 LH |
| BSP | |
| 2 = G 1/8" | |
| 4 = G 1/4" | |
| 6 = G 3/8" | |
| 8 = G 1/2" | |

3

5. Hose Size

- 2 = 1/8" hose
- 2A = 5/32" hose
- 3 = 3/16" hose
- 4 = 1/4" hose
- 5 = 5/16" hose
- 6 = 3/8" hose
- 8 = 1/2" hose
- 10 = 5/8" hose
- 12 = 3/4" hose
- 16 = 1" hose
- 24 = 1-1/2" hose
- 32 = 2" hose

C

6. Fitting Material


- C = Stainless steel
 - Blank = Carbon steel
- Any other materials will be noted in the Fitting section


For detailed ordering information, please consult price list or contact Parflex Division.



Hose Assembly Part Numbers

polyflex Hose Assembly Nomenclature

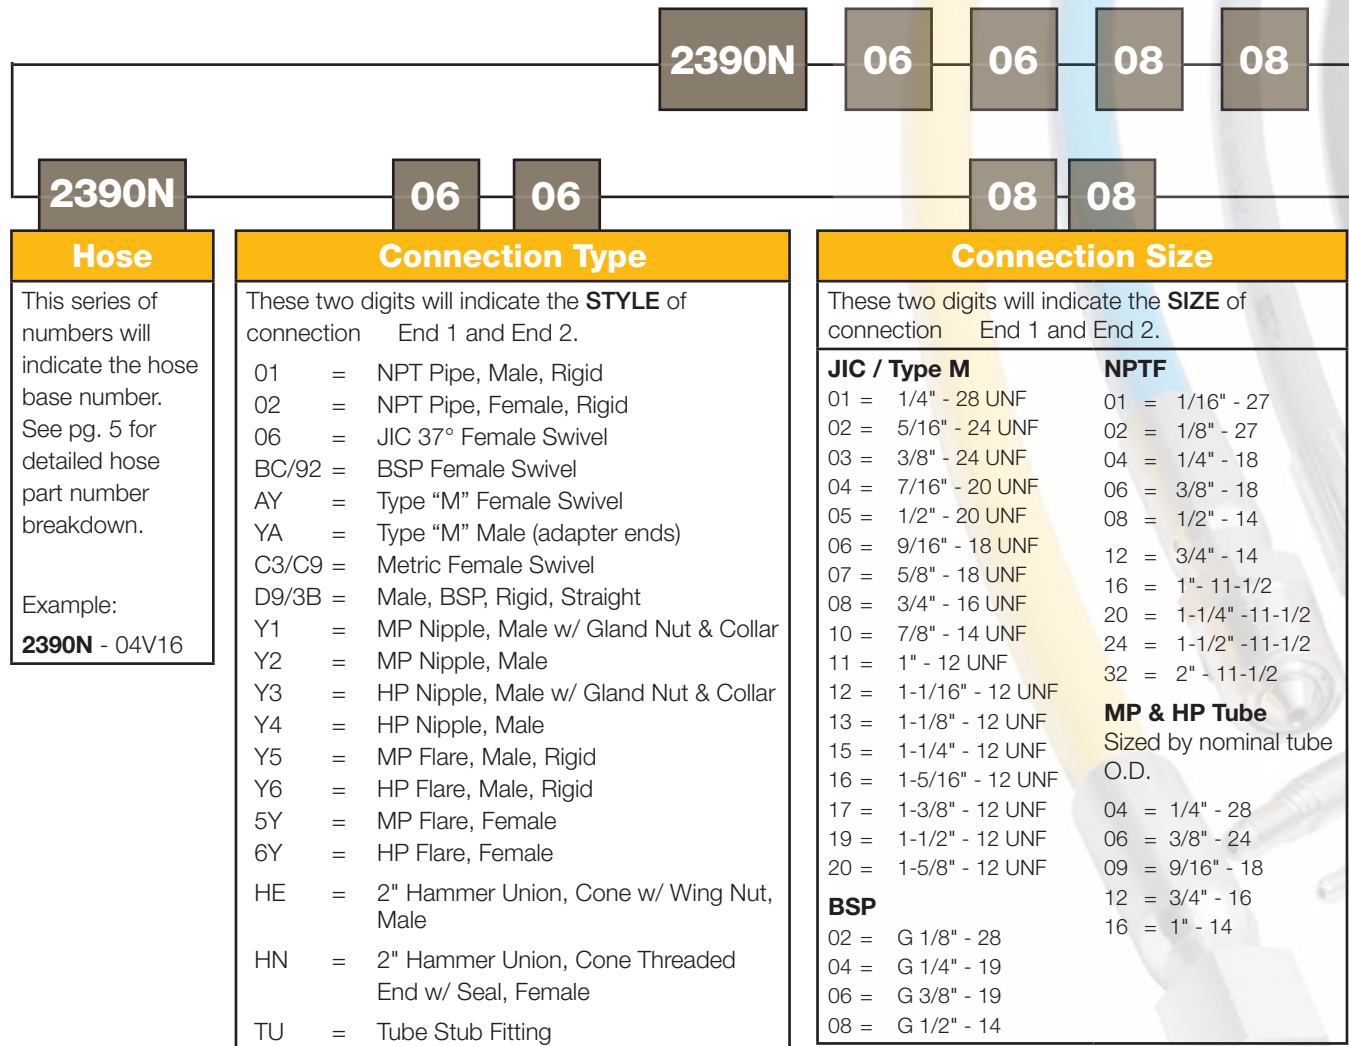

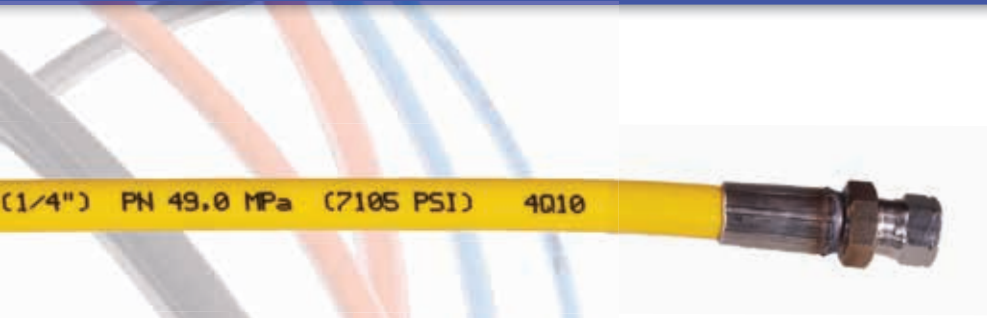

04

C

16

600

Hose Size

When specifying hose size, indicate the two-digit code.

| Hose I.D. | Hose Dash Size | Code |
|-----------|----------------|------|
| 5/64" | 012 | 1A |
| 1/8" | 02 | 02 |
| 5/32" | 025 | 2B |
| 3/16" | 03 | 03 |
| 1/4" | 04 | 04 |
| 5/16" | 05 | 05 |
| 3/8" | 06 | 06 |
| 1/2" | 08 | 08 |
| 3/4" | 12 | 12 |
| 1" | 16 | 16 |
| 1-1/4" | 20 | 20 |
| 1-1/2" | 24 | 24 |
| 2" | 32 | 32 |
| 3" | 48 | 48 |

Fitting Material

This letter indicates the material of the fittings used.
 S = Carbon Steel
 C = Stainless Steel

Hose Variation Number

This series of numbers will indicate the hose variation number. See pg. 5 for detailed hose part number breakdown.

 Example:
 2390N-04 V**16**

Length

Indicate the assembly length in imperial units. This example is 600 inches.

For detailed ordering information, please consult price list or contact Parflex Division.



Waterblast / Water Jetting



Parker Parflex provides the best ultra high pressure hoses and fittings to fill the needs of the market segments that utilize water blast and water jetting technologies.

Parflex provides the power generation and refining markets with small diameter, low volumetric expansion hoses for tight routing applications, such as high pressure heat exchanger tube cleaning in petro-chemical and power plants.

polyflex hoses are also ideal for construction applications such as hydrodemolition, industrial cleaning and surface preparation.

polyflex hoses are also used in industries where water cutting is utilized — cutting through everything

from chicken, in the food processing industry, to more industrial mediums like glass and concrete.

polyflex hoses are the highest quality ultra high pressure thermoplastic hoses on the market, and that makes them the best choice for any water blast or water jetting application.

The water jetting icon above indicates hoses that are suitable for these applications. A visual index of these hoses is on pgs. 11-12.

Applications

- Heat exchanger tube cleaning
- Water jet cutting: metal, concrete, glass, ceramics, plastics/rubber, stone
- Surface preparation
- Deburring
- Pavement Maintenance
- Tank cleaning
- Boiler cleaning
- Paint removal
- Cooling towers
- Hydrodemolition systems
- Sewer jetting
- Ship cleaning
- Rubber removal from airport runways
- Ultra high pressure food pasteurization
- Ultra high pressure water jet surgery






Markets



- Industrial Cleaning
- Power Generation
- Chemical Refining
- Machine Tools
- Highway Maintenance
- Construction
- Marine
- Food Processing











Visual Index of Waterblast / Water Jetting Hoses



| | | | | | | |
|--------------------|---|---|---|---|---|--------------------|
| 2200 Series | 2240D | High pressure service for tube cleaning applications such as heat exchangers / Flexible lance | 2244N | High pressure service for the construction and shipbuilding industries / General industrial cleaning applications | 2248D | Tube cleaning hose |
| |  A-15 | |  A-17 | |  A-15 | |




| | | | | |
|--------------------|---|---|--|---|
| 2300 Series | 2380N-...W | Construction and shipbuilding industries / General industrial cleaning applications | 2388N-...W | Construction and shipbuilding industries / General industrial cleaning applications |
| |  A-23 | |  A-27 | |

| | | | | | | |
|--------------------|---|--|--|---|---|--|
| 2400 Series | 2440D | High pressure heat exchanger tube cleaning | 2440N | Construction and shipbuilding industries / General industrial cleaning applications | 2448D | High pressure heat exchanger tube cleaning |
| |  A-31 | |  A-33 | |  A-31 | |

| | | |
|--------------------|---|---|
| 2500 Series | 2580N | General industrial cleaning in construction and shipbuilding industries / Hydrodemolition |
| |  A-37 | |

| | | | | |
|--------------------|---|---|---|---|
| 2600 Series | 2640D | Construction and shipbuilding industries / General industrial cleaning applications | 2640N | Construction and shipbuilding industries / General industrial cleaning applications |
| |  A-39 | |  A-41 | |

| | | | | |
|--------------------|---|--|---|--|
| 2700 Series | 2740D | Tight routing applications, such as high pressure heat exchanger tube cleaning | 2741D | Construction and shipbuilding industries / High pressure lance |
| |  A-43 | |  A-45 | |

| | | | | | | |
|--------------------|---|---|---|--|---|---|
| 2800 Series | 2840D | Water jet cutting equipment with water only or with abrasive additives / Hydroforming | 2841D | Very high pressure lances up to 40,610 psi | 2849D | Water jet cutting equipment with water only or with abrasive additives / Hydroforming |
| |  A-47 | |  A-49 | |  A-51 | |

For detailed ordering information, please consult price list or contact Parflex Division.



The Parflex and Polyflex divisions of Parker Hannifin have been supplying a wide range of thermoplastic hose products to the oil and gas market for over 30 years.

With production plants in both the USA and Europe, supported by Parker's global sales and distribution network, customers can benefit from local service and the supply of quality parts wherever they are situated.

polyflex hoses can be used in a wide variety of Oil & Gas applications, both onshore and offshore, and are available with seawater resistant cover materials.

The Oil & Gas icon above indicates hoses with applications in the Oil & Gas industry, such as, umbilical and jumper hoses, BOP and hotline hoses, hydraulic control and testing hoses and large bore hoses for well servicing.

A visual index of Oil & Gas hoses can be found on pgs. 15-16.

Applications

- Umbilical Hose
- BOP Stack Hose
- Oilfield Well Service
 - Cementing
 - Chemical injection
 - Well intervention
- Gas transfer
- High volume flow rate pumping offshore
- Wireline / Grease injection
- Pressure testing
- Snubbing and hydraulic workover systems
- Nitrogen pumping
- Perforating
- Well equalization lines





Markets


- Onshore Drilling
- Offshore Drilling
- Offshore Production











Visual Index of Oil & Gas Hoses

| | | | | |
|--------------------|---|--|---|--|
| 2000 Series | 2022N-... 5K | Long-length hose and hose umbilicals / Oilfield pressure control devices / Offshore oil applications | 2022N-... 10K | Long-length hose and hose umbilicals / Oilfield pressure control devices / Offshore oil applications |
| |  A-13 | |  A-13 | |

| | | |
|--------------------|---|--|
| 2200 Series | 2244N | Offshore applications, including methanol injection, control fluids and well stimulation |
| |  A-17 | |




| | | | | | | |
|--------------------|---|-----------------------------------|---|-----------------------|---|---|
| 2300 Series | 2380N | Long-length subsea umbilical hose | 2388N | Grease injection hose | 2390N | Subsea hydraulic controls / Long-length hot line hose / BOP stack control lines |
| |  A-25 | |  A-27 | |  A-29 | |

| | | | | |
|--------------------|---|-----------------------------------|---|-----------------------------------|
| 2400 Series | 2440N | Long-length subsea umbilical hose | 2448N | Long-length subsea umbilical hose |
| |  A-35 | |  A-35 | |

| | | |
|--------------------|---|------------------------------------|
| 2600 Series | 2640D | Ultra high pressure umbilical hose |
| |  A-39 | |

| | | |
|-----------------|---|--|
| Sea Wolf | 57CR | Offshore oil field exploration and production applications |
| |  A-53 | |



| | | | | | | |
|----------------|---|-----------------------------------|---|-----------------------------------|---|-----------------------------------|
| ChemJec | 2440M | Long-length subsea umbilical hose | 2448M | Long-length subsea umbilical hose | 2640M | Long-length subsea umbilical hose |
| |  | A-65 |  | A-65 |  | A-65 |

| | | | | | | | |
|---|---|---|--|--|---|---|---|
| Black Eagle / Golden Eagle | 2240N-48V80 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation | 2440N-48V80 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation | 2448N-32V30 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation | |
| |  | A-61 |  | A-61 |  | A-59 | |
| 2580N-32V80 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation | 2640N-24V80 | Water and gas injection hose / Acidizing / Mud circulation | 2640N-24V80-15K | Water and gas injection hose / Acidizing / Mud circulation | 2640N-48V80 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation |
|  | A-59 |  | A-57 |  | A-57 |  | A-61 |
| 2648N-32V80 | Water and gas injection hose / Acidizing / Mud circulation | 2240N-32V10 | Cementing Hose | 2248N-32V10 | Cementing Hose | 2448M-32V88 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation |
|  | A-59 |  | A-63 |  | A-63 |  | A-65 |
| 2580M-32V88 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation | 2640M-24V88 | Cementing Hose / Water and gas injection hose / Acidizing / Mud circulation | | | | |
|  | A-65 |  | A-65 | | | | |

For detailed ordering information, please consult price list or contact Parflex Division.

Hydraulic

Parflex also offers a number of hoses for high pressure hydraulic applications.

polyflex hoses can be used to power hydraulic tools, such as torque wrenches and bolt tensioners. They are also used on rescue equipment such as the Jaws of Life and similar tools.

Hoses can be easily bonded to create twin-line and multi-line assemblies.

Other suitable hydraulic applications include test rigs and pressure testing equipment.

The hydraulic icon above indicates hoses that are suitable for hydraulic applications. A visual index of these hoses can be found on pgs. 19-20.

Applications

- Rescue tools (i.e. Jaws of Life)
- Torque wrenches
- Bolt tensioners
- Pressure testing
- Power Units
- Hydraulic Jacks






Markets






- Rescue Tools
- Hydraulic Tools
- Automotive
- Airports & Military Bases
- Engineering & Test Facilities
- Manufacturers using Hydraulic Presses
- Hydraulic Service/Repair Facilities
- Construction Equipment





Visual Index of Hydraulic Hoses

| | | | | |
|--------------------|---|---|---|---|
| 2000 Series | 2020N | Mini-hydraulic and gas applications/ Measuring and diagnostic systems | 2022N-04 5K or 10K | High pressure hydraulics, pneumatics and lubricating oils / High pressure tools / Jacks/ Test apparatus |
| |  A-11 | |  A-13 | |

| | | |
|--------------------|---|--|
| 2200 Series | 2244N | For use with petroleum or synthetic hydraulic fluids, gas applications and compressors |
| |  A-17 | |

| | | | | | | |
|--------------------|---|--|---|--|---|--|
| 2300 Series | 2370N | For use with petroleum or synthetic hydraulic fluids / hydraulic tools, clamps, rescue equipment | 2380F-08 | Applications with aggressive fluids / Glue applications in automotive industry | 2380N | Hydraulic controls / Test systems with synthetic and phosphate ester fluids (e.g. Skydrol) |
| |  A-19 | |  A-21 | |  A-25 | |
| | 2388N | Hydraulic Jacks / Bolt tensioning | 2390N | Pressure testing / Portable hydraulic tools / Offshore hydraulic systems | | |
| |  A-27 | |  A-29 | | | |

| | | | | |
|------------------|---|--|---|--|
| HP Series | HP | High pressure hydraulic, pneumatic and lubricating oils / High pressure tools / Rigging jacks / Test apparatus / Oilfield pressure control devices | HP8 | High pressure hydraulic, pneumatic and lubricating oils / High pressure tools / Rigging jacks / Test apparatus / Oilfield pressure control devices / Aerial lift equipment |
| |  A-55 | |  A-55 | |

Hose

High Pressure and
Ultra High Pressure
Thermoplastic

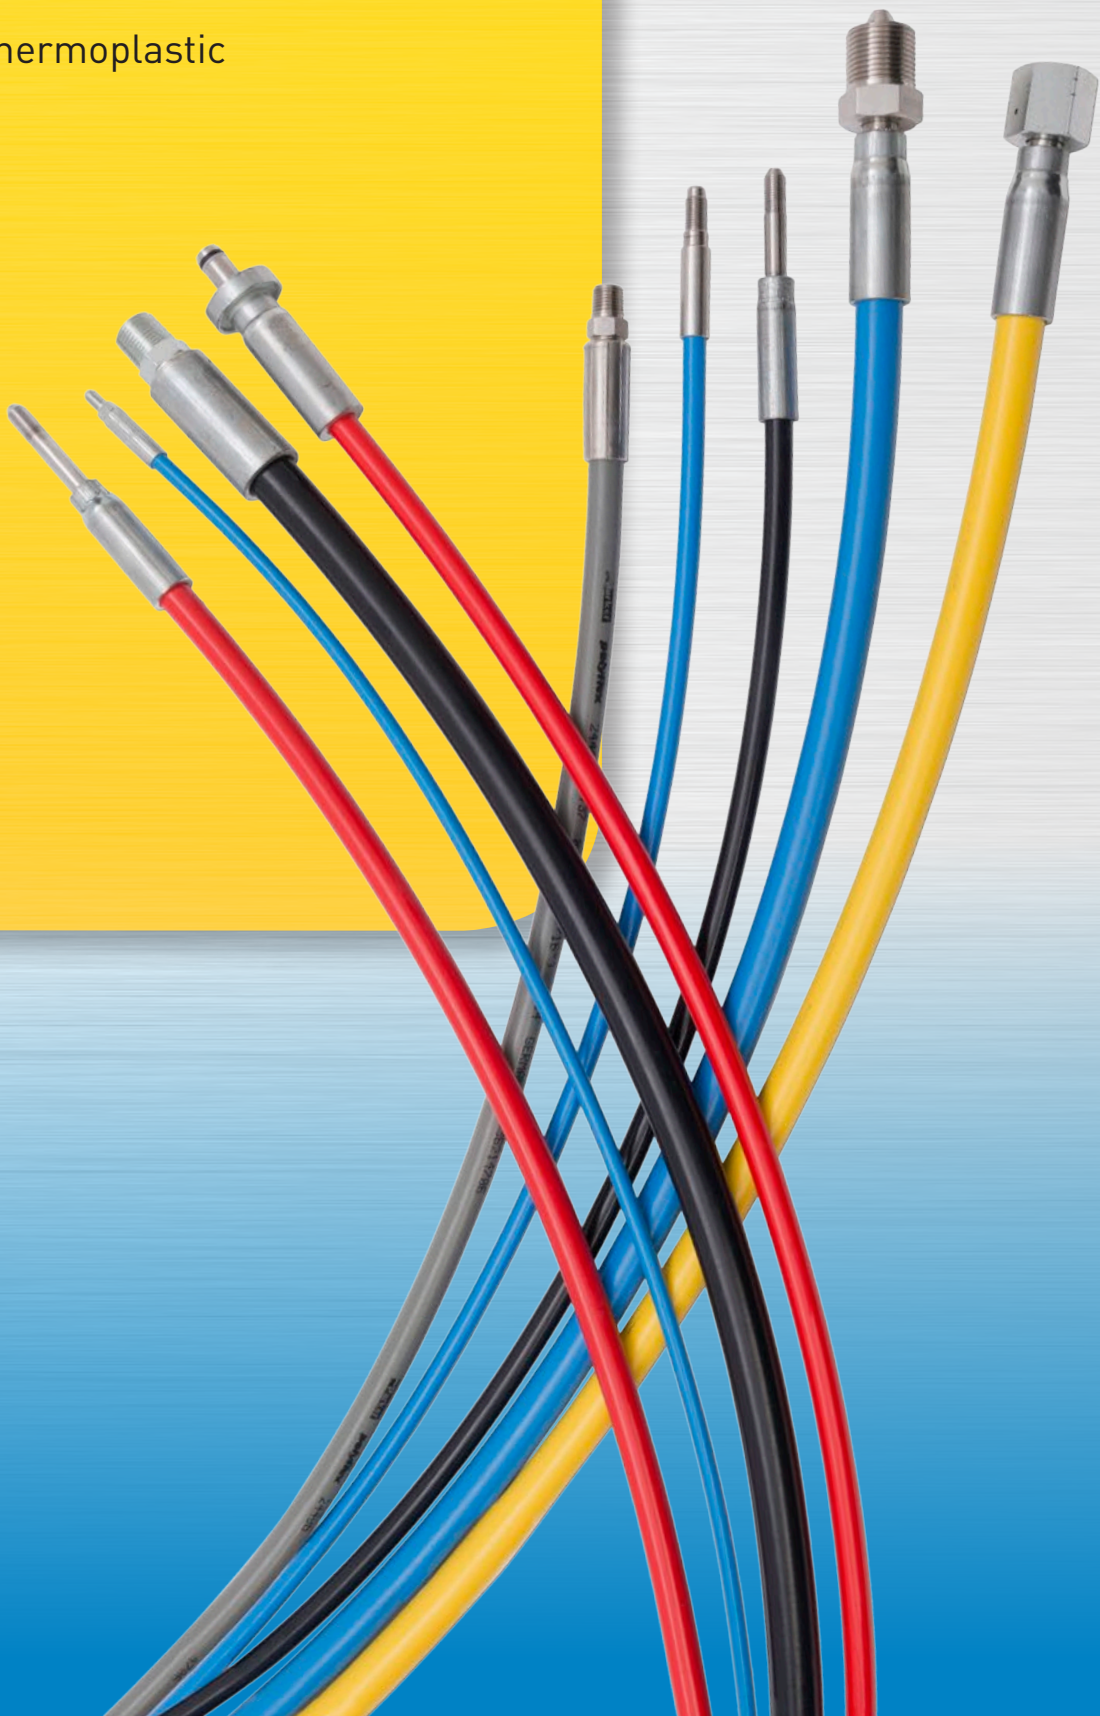


Table of Contents

Introduction

| | |
|---|-----|
| Why polyflex Thermoplastic Hose? | A-2 |
| polyflex Hose Safety | A-3 |
| How to Read the Hose Section | A-4 |
| Hose Selection - by Working Pressure - Waterblast Hoses | A-5 |
| Hose Selection - by Working Pressure - Hydraulic Hoses | A-7 |
| Hose Selection - by Working Pressure - O&G Hoses | A-9 |

polyflex Thermoplastic Hose

| | |
|-------------------------------|------|
| 2000 Series | A-11 |
| 2020N | A-11 |
| 2022N | A-13 |
| 2200 Series | A-15 |
| 2240D/2248D | A-15 |
| 2244N | A-17 |
| 2300 Series | A-19 |
| 2370N | A-19 |
| 2380F | A-21 |
| 2380N-...W | A-23 |
| 2380N | A-25 |
| 2388N | A-27 |
| 2390N | A-29 |
| 2400 Series | A-31 |
| 2440D/2448D | A-31 |
| 2440N - Waterblast Hose | A-33 |
| 2440N/2448N | A-35 |
| 2500 Series | A-37 |
| 2580N | A-37 |
| 2600 Series | A-39 |
| 2640D | A-39 |
| 2640N | A-41 |
| 2700 Series | A-43 |
| 2740D/2749D | A-43 |
| 2741D | A-45 |
| 2800 Series | A-47 |
| 2840D | A-47 |
| 2841D | A-49 |
| 2849D | A-51 |
| 57CR / Seawolf | A-53 |
| HP Series | A-55 |
| HP/HP8 | A-55 |
| Black Eagle | A-57 |
| 1-1/2" Black Eagle | A-57 |
| 2" Black Eagle | A-59 |
| 3" Black Eagle | A-61 |
| Black Eagle Light | A-63 |
| Golden Eagle | A-65 |
| ChemJec | A-67 |



Why Thermoplastic?

Easy and Quick Installation

- ◆ Very small sizes starting with inner diameters of 2 mm (DN2 or -012). Typical disadvantages that come with using oversized hoses, such as extensive costs, waste of space, extensive weight, and complicated installation, can be avoided
- ◆ Lightweight by design – possible weight reduction of more than 50% when compared to conventional hydraulic hoses
- ◆ Very small outer diameters due to compact design
- ◆ Small bend radii to save installation space
- ◆ Long, continuous hose lengths up to 4000 m help minimize scrap due to unusable cut-off pieces and often render connection joints unnecessary
- ◆ Wide range of colours for easy identification of hose function and to harmonize the appearance of machine and hose
- ◆ Easy cutting and processing, especially with textile fiber reinforced hose types.

Outstanding Performance

- ◆ Very high working pressures up to 58,000 psi
- ◆ Reduced pressure loss due to smooth core tubes
- ◆ Electrically Conductive Hoses according to SAE J517
- ◆ Volumetric expansion according to customers needs
- ◆ High purity of the extremely smooth core tube reduces the danger of contamination of the hydraulic system caused by deposits in the hose
- ◆ Excellent abrasion resistance
- ◆ High collapse pressure
- ◆ Long shelf life
- ◆ Individual customer hose bundles
- ◆ Customer specific hose marking

Dedicated Features

- ◆ Outstanding chemical resistance
 - of hose outer cover against environmental effects
 - of hose core tube against media
- ◆ Long service life due to excellent UV- and ozone-resistance
- ◆ Seawater-resistant hose materials
- ◆ Wide temperature range from -40°F up to 212°F
- ◆ Easily bond hoses together into twinline or multiline assemblies to achieve space-saving and compact units
- ◆ Suitable for industrial gases

For detailed ordering information, please consult price list or contact Parflex Division.

polyflex Hose Safety

For Your Safety

The hose assemblies listed in this catalog are all special constructions with the hose having up to eight spiral layers of steel wire. Due to this construction, pressures are achieved which far exceed international standards. These hose types are manufactured and tested according to the **polyflex** standards which have proved to be effective over many years.

polyflex hose assemblies are used at considerable working pressures. The critical area of a hose assembly is the connection between flexible hose and rigid fitting (crimping area). Only the use of original **polyflex** components (hose, fittings and tooling) and full compliance with the **polyflex** assembly instructions can guarantee safety and conformity with standards. It is essential that training be given to customers in the hose assembly process in order to make high quality **polyflex** maximum pressure hose assemblies.

For the production and testing of the hose assemblies relevant to the applications, the guidelines and technical regulations, as well as, the protection and hazard prevention rulings must be adhered to.

You, as the manufacturer of **polyflex** hose assemblies, are obliged to mark these hose assemblies according to the regulations and to verify their safety by a final pressure test.

Non-compliance with these rules can lead to the premature failure of the hose assembly and the loss of warranty.



- Treat high pressure hose with extreme caution. **polyflex** hoses are ultra high pressure hoses, not garden hoses, and should be treated like high pressure vessels.
- Always inspect for frayed, damaged or worn spots before using.
- Check the end connections for wear, rust, cracks or other deterioration which could produce a dangerous projectile.
- Know the working pressures and burst pressures of all hoses before using them.
- Always use clean, filtered medium to prolong hose life.
- Always clean, drain and coil hoses after use.
- Use only hoses assembled by an authorized Parker distributor.
- Never fix a hose at the sleeves.
- Never use a hose with cuts or wire showing through the outer cover.
- Never use a hose with bubbles, listers or kinks.
- Don't exceed the bend radius and pressure rating for each hose.
- Don't run over the or crush the hose with vehicles.
- Hoses with corroded or leaking end connections should be avoided.
- Avoid using dirty medium or medium with sulfur compound in it.
- Don't bend the hose over scaffolding or pull heavy equipment with the hose.
- Don't let hose support its own weight off towers or buildings.
- Never use hose without hose arrestors (containment grips).
- Don't expect water jetting or hydraulic hose to last forever.
- Don't change or repair a hose without instructions from the manufacturer.
- Never disconnect a hose under pressure.

How to Read the Hose Section

| 1 | 2 | 3 | | 4 | | 5 | | 6 | | 7 | | 8 |
|-------------|--------------|--------------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| Part Number | Jacket Color | Nominal I.D. | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
| # | | | | | | | | | | | | |
| | | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| 2440N-16V37 | Gray | 1 | 25.0 | 1.47 | 37.4 | 8,160 | 56.2 | 11.8 | 300 | 1.34 | 2.00 | LX |

NOTE: The imperial measurements are in black. The metric equivalents appear in blue.

1 Part Number

Hose Series Part Number - gives the construction and core tube material of the hose

2 Jacket Color

Color of the hose jacket

3 Inside Diameter

Distance between inner walls of the core tube.

4 Outside Diameter

Nominal diameter of the hose

5 Working Pressure

Working pressure rating must meet or exceed the maximum operating pressure of the system including pressure spikes.

Working pressure listed is dependent on application. Water blast applications will typically have a 2.5:1 design factor. Hydraulic and Oil & Gas applications will typically have a 4:1 design factor. Contact Parflex division for detailed hose performance criteria.

6 Minimum Bend Radius

Minimum radius that the hose can be bent. Exceeding the bend radius can cause kinking, inner tube washout, or excessive stress on reinforcement resulting in shortened service life.

7 Weight

Provided in lbs/ft and kg/m

8 Approved Fitting

Approved fitting series for selected hose. Technical information for fittings is provided in Section B.

Hose Selection Chart

| Nominal Size | | | | Working Pressure psi [MPa] | | | | | | | |
|----------------|------|------|------|----------------------------|-------------------|-------------------|------------------|-------------------|-------------------|-------------------|-------------------|
| | | | | 2020N | 2240D | 2248D | 2244N-...W | 2380N-...W | 2388N-...W | 2440D | 2448D |
| DN | size | inch | mm | | | | | | | | |
| 2 | -012 | 5/64 | 2.0 | 11,020 (76.0) | | | | | | | |
| 3 | -02 | 1/8 | 3.2 | | 15,950 (110.0) | | | | | 30,000 (207.0) | |
| 4 | -025 | 5/32 | 4.0 | | 17,400 (120.0) | 21,750 (150.0) | | | | 31,900 (220.0) | 43,645 (301.0) |
| 5 | -03 | 3/16 | 4.8 | | 15,955 (110.0) | | | | | 26,100 (180.0) | |
| 6 | -04 | 1/4 | 6.4 | | 15,950 (110.0) | | | 15,950 (110.0) | 18,560 (128.0) | 23,780 (164.0) | |
| 8 | -05 | 5/16 | 7.9 | | 13,050 (90.0) | | | 14,500 (100.0) | | 21,750 (150.0) | |
| 10 | -06 | 3/8 | 9.5 | | | | | | | | |
| 12 | -08 | 1/2 | 12.7 | | | | 12,760 (88.0) | | 15,950 (110.0) | | |
| 20 | -12 | 3/4 | 19.0 | | | | | | | | |
| 25 | -16 | 1 | 25.4 | | | | | | | | |
| Fitting Series | | | | EX | PL AX NX | TX | LX | KY LX | KY BS | LX | LX |
| Page # | | | | A-11 | A-15 | A-15 | A-17 | A-23 | A-27 | A-31 | A-31 |



Working Pressure - Waterblast

| | 2440N | 2580N | 2640D | 2640N | 2740D | 2741D | 2840D | 2841D | 2849D |
|--|-------------------|-------------------|-------------------|--------------------|-------------------|-------------------|--------------------|-------------------|-------------------|
| | | | | | | | | | |
| | | | | | | | | | |
| | 12,500 (87.5) | | 40,600 (280.0) | | 43,500 (300.0) | | | | |
| | 12,688 (87.5) | | 36,230 (250.0) | | 40,600 (280.0) | | *58,000 (400.0) | | |
| | 20,300 (140.0) | | | | | | | | |
| | | | | | 36,230 (250.0) | 36,230 (250.0) | 43,500 (300.0) | 43,500 (300.0) | 55,000 (380.0) |
| | | 23,200 (160.0) | | | | | | | |
| | 20,300 (140.0) | 20,300 (140.0) | | 26,100 (180.0) | | | 36,250 (250.0) | | |
| | 14,500 (100.0) | 17,400 (120.0) | | 20,300 (140.0) | | | | | |
| | 13,050 (90.0) | | | *17,400 (120.0) | | | | | |
| | LX | BL | 2X | 5X | 2X | 2X | 2X WX | 2X | WX-55 |
| | A-33 | A-37 | A-39 | A-41 | A-43 | A-45 | A-47 | A-49 | A-51 |

* Not DIN EN 1829-2 qualified. Others are with PFDE fittings.

For detailed ordering information, please consult price list or contact Parflex Division.

Hose Selection Chart

| Dimensions → | DN | 2 | 3 | 4 | 5 | 6 | 8 | |
|----------------------------|---------------|-----------------|-----------------|------------------|------|------------------|------------------|---------|
| | size | -012 | -02 | -025 | -03 | -04 | -05 | |
| Hose Type ↓ | inch | 5/64 | 1/8 | 5/32 | 3/16 | 1/4 | 5/16 | |
| | mm | 2 | 3.2 | 4 | 4.8 | 6.4 | 7.9 | |
| Working Pressure psi [MPa] | 2020N | 6,890 (47.5) | 5,800 (40.0) | | | | | 0.95 in |
| | 2022N-...5K | | | | | 5,000 (34.5) | | |
| | 2022N-...10K | | | | | 10,000 (69.0) | | |
| | 2244N | | | 10,875 (75.0) | | | | |
| | 2370N | | | | | | | |
| | 2380F | | | | | | | |
| | 2380N | | | | | 10,150 (70.0) | 8,500 (586.0) | |
| | 2388N | | | | | 11,600 (80.0) | | |
| | 2390N | | | | | 7,107 (49.0) | | |
| | 2580N-...MSHA | | | | | | | |
| | HP / HP8 | | | | | 10,000 (69.0) | 10,000 (69.0) | |



Working Pressure - Hydraulic

| | 10 | 12 | 20 | 25 | 32 | Fittings | Page |
|--|------------------|------------------|-----------------|-----------------|-----------------|----------------------|------|
| | -06 | -08 | -12 | -16 | -20 | | |
| | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | | |
| | 9.5 | 12.7 | 19 | 25.4 | 31.8 | | |
| | | | | | | EX / RX | A-11 |
| | 5,000 (34.5) | 5,000 (34.5) | | | | 55 | A-13 |
| | 10,000 (69.0) | 10,000 (69.0) | | | | 8X / 3X / LX | A-13 |
| | | 7,975 (55.0) | | | | 8X | A-17 |
| | | 5,075 (35.0) | 4,350 (30.0) | 3,985 (27.5) | | 9X / NX | A-19 |
| | | 4,712 (32.5) | | | | NX | A-21 |
| | | 7,975 (55.0) | | 5,510 (38.0) | 3,985 (27.5) | 8X / NX | A-25 |
| | | | | | | 8X | A-27 |
| | | 6,017 (41.5) | 5,075 (35.0) | 4,060 (28.0) | | 8X / 9X / E2 / E3 | A-29 |
| | | 10,150 (70.0) | | | | | A-37 |
| | 8,000 (55.2) | | | | | HP | A-55 |

For detailed ordering information, please consult price list or contact Parflex Division.



Hose Selection Chart

| Dimensions → | DN | 6 | 8 | 10 | 12 | 20 | |
|---|---|----------------|----------------|----------------|----------------|---------------|--|
| | size | -04 | -05 | -06 | -08 | -12 | |
| Hose Type ↓ | inch | 1/4 | 5/16 | 3/8 | 1/2 | 3/4 | |
| | mm | 6.4 | 7.9 | 9.5 | 12.7 | 19 | |
| Working Pressure psi [MPa] | High Pressure Aramid Hose | | | | | | |
| | 2022N-...5K | 5,000 (34.5) | | 5,000 (34.5) | 5,000 (34.5) | | |
| | 2022N-...10K | 10,000 (69.0) | | 10,000 (69.0) | 10,000 (69.0) | | |
| | 57CR | | | | 5,000 (34.5) | | |
| | High Pressure Wire Hose, Polyamide | | | | | | |
| | 2380N | | | | | | |
| | 2390N | 7,107 (49.0) | | 6,450 (44.5) | 6,017 (41.5) | 5,075 (35.0) | |
| | 2440N | 12,500 (87.5) | | 12,688 (87.5) | 11,745 (81.0) | 10,000 (69.0) | |
| | 2440N-...10K | | | | | | |
| | 2448N | 15,000 (103.5) | | | 12,688 (87.5) | | |
| | 2640N | | | | | 12,500 (87.5) | |
| | High Pressure Wire Hose, ChemJec | | | | | | |
| | 2440M | 12,500 (87.5) | 10,000 (69.0) | 10,000 (69.0) | 10,000 (69.0) | | |
| | 2448M | 15,000 (103.5) | 15,000 (103.5) | 15,000 (103.5) | | | |
| | 2640M | | | | 15,000 (103.5) | | |
| BOP and Hotline Hoses | | | | | | | |
| 2390N | 7,107 (49.0) | | | 6,017 (41.5) | 5,075 (35.0) | | |
| Large Bore for Well Servicing (Black Eagle and Golden Eagle) | | | | | | | |
| 2240N | | | | | | | |
| 2248N | | | | | | | |
| 2440N | | | | | | | |
| 2448N | | | | | | | |
| 2580N | | | | | | | |
| 2640N | | | | | | | |
| 2640N-...15K | | | | | | | |
| 2648N | | | | | | | |
| 2448M | | | | | | | |
| 2580M | | | | | | | |
| 2640M | | | | | | | |



Working Pressure - Oil & Gas Applications

| | 25 | 32 | 40 | 50 | 78 | Fittings | Page |
|--|---------------|-------|----------------|----------------|----------------|-------------|-----------|
| | -16 | -20 | -24 | -32 | -48 | | |
| | 1 | 1 1/4 | 1 1/2 | 2 | 3 | | |
| | 25.4 | 31.8 | 38.1 | 50.8 | 76 | | |
| | | | | | | 55 | A-13 |
| | | | | | | 8X/3X/LX | A-13 |
| | 5,000 (34.5) | | | | | CR | A-53 |
| | 5,510 (38.0) | | | | | 8X Subsea | A-25 |
| | 4,060 (28.0) | | | | | 8X/9X/LX/SS | A-29 |
| | 8,120 (56.0) | | | | | 5X/LS/LX | A-35 |
| | 10,000 (69.0) | | | | | LX | A-35 |
| | | | | | | 8X/LX | A-35 |
| | | | | | | 5X | A-41 |
| | | | | | | 8X/LX | A-67 |
| | | | | | | UX/LX | A-67 |
| | | | | | | 5X | A-67 |
| | 4,060 (28.0) | | | | | 8X/9X/E2/E3 | A-29 |
| | | | | 3,000 (20.7) | 5,000 (34.5) | TX/S6 | A-61/A-63 |
| | | | | 5,000 (34.5) | | S6 | A-63 |
| | | | | | 10,000 (69.0) | LX | A-61 |
| | | | | 5,000 (34.5) | | 5X | A-59 |
| | | | | 10,000 (69.0) | | 5X | A-59 |
| | | | 10,000 (69.0) | | 15,000 (103.5) | 5X | A-57/A-61 |
| | | | 15,000 (103.5) | | | 5X | A-57 |
| | | | | 15,000 (103.5) | | CX | A-59 |
| | | | | 5,000 (34.5) | | 5X | A-65 |
| | | | | 10,000 (69.0) | | 5X | A-65 |
| | | | 10,000 (69.0) | | | 5X | A-65 |

For detailed ordering information, please consult price list or contact Parflex Division.



2020N - High Pressure Hose

Features & Applications

- Very small hose I.D.
- Very flexible hose
- High pressure services where very small hose O.D. is required
- Versatile usage in mini-hydraulic and gas applications
- Measuring and diagnostic systems



Markets Certifications

- Waterblast
- DIN EN1829-2 compliant

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|-----|--------------------------|------|---------------------|----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2020N-012R30 | Black | 2 | 5/64 | 2.0 | 0.20 | 4.9 | 11,020 | 76.0 | 0.79 | 20 | 0.01 | 0.02 | EX |



Markets

- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|-----|--------------------------|------|---------------------|----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2020N-012R30 | Black | 2 | 5/64 | 2.0 | 0.20 | 4.9 | 6,890 | 47.5 | 0.79 | 20 | 0.01 | 0.02 | EX |
| 2020N-02V30 | Black | 3 | 1/8 | 3.2 | 0.24 | 6.0 | 5,800 | 40.0 | 1.20 | 30 | 0.02 | 0.02 | EX/RX* |

Construction

Core Tube: Polyamide

Reinforcement: One braided layer of high tensile strength synthetic fiber

Cover: Polyamide, -012 pin-pricked on request

Options

Colors: ● Black

Temperature Range

-012 sizes: -40°F to +180°F (-40°C to +82.2°C)

-02 sizes: -40°F to +212°F (-40°C to +100°C) with petroleum or synthetic hydraulic fluids and gases

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Not for use in airless paint spray or solvent spraying applications. Not a static dissipative hose.


Hose must be pin-pricked for gas service.

*RX Series fittings are field assembled. Contact the division for more information.

2020N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2020N-012R30 | 2020N-02V30 |
|--|---|--|
| Fitting Part Numbers  | 101EX-2-012 101EX-4-012 106EX-4-012 1C9EX-6-012 1C9EX-8-012 | 106EX-4-02 1C9EX-8-02 201RX-2-2C 206RX-4-2C 2TURX-4-2C 601EX-2-2C |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers |
|-------------|---|
| | Bend Restrictor |
| 2020N-02V30 | MBR003 (w/ reusable fittings) MBR004 (w/ crimp fittings) |

2022N - High Pressure Hose



Features and Applications

- Flexible and lightweight with excellent pressure capabilities
- Smooth bore for improved flow rate and low pressure drop
- ISO 13628-5 "Specification for Subsea Production Control Umbilicals," Section 7.9 Hose construction
- Long-length hose and hose umbilicals requiring lightweight construction
- Oilfield pressure control devices
- Offshore oil applications (control fluids, acidizing, methanol injection, well stimulation)
- High pressure hydraulics, pneumatics and lubricating oils
- High pressure tools
- Jacks
- Test apparatus



Markets

- Oil & Gas
- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-----------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2022N-04V91-5K | Black | 6 | 1/4 | 6.4 | 0.50 | 12.7 | 5,000 | 34.5 | 2.01 | 51 | 0.08 | 0.12 | 55* |
| 2022N-04V91-10K | Black | 6 | 1/4 | 6.4 | 0.54 | 13.8 | 10,000 | 69.0 | 3.94 | 100 | 0.09 | 0.14 | 8X |
| 2022N-06V91-5K | Black | 10 | 3/8 | 9.5 | 0.63 | 16.1 | 5,000 | 34.5 | 2.99 | 76 | 0.10 | 0.15 | 55* |
| 2022N-06V91-10K | Black | 10 | 3/8 | 9.5 | 0.75 | 19.0 | 10,000 | 69.0 | 3.94 | 100 | 0.16 | 0.24 | 3X |
| 2022N-08V91-5K | Black | 12 | 1/2 | 12.7 | 0.82 | 20.8 | 5,000 | 34.5 | 4.00 | 102 | 0.11 | 0.17 | 55* |
| 2022N-08V91-10K | Black | 12 | 1/2 | 12.7 | 0.97 | 23.2 | 10,000 | 69.0 | 3.94 | 100 | 0.23 | 0.34 | LX |

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement: High tensile aramid fiber

Cover: Sea water resistant Polyurethane, pin-pricked on request to allow adequate venting of permeable fluids

Options

Colors: ● Black

Temperature Range

-40°F to +131°F (-40°C to +55°C)

Notes


Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

*For Parkrimp crimpers, refer to the crimp instructions in CAT 4460.

2022N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2022N-04V91-5K | 2022N-04V91-10K | 2022N-06V91-5K | 2022N-06V91-10K | 2022N-08V91-5K | 2022N-08V91-10K |
|--|--|--|---|---|---|--|
| Fitting Part Numbers  | 19255-4-4C 1C955-8-4C 1C955-10-4C 1C955-12-4C 10655-4-4C 10655-6-4C | 1068X-6-04C 1C98X-8-04C 1C98X-10-04C 1AY8X-6-04C 1068X-4-04C | 10655-6-6C 1C955-12-6C 19255-6-6C | 1063X-6-06C 1C93X-14-06C 1C93X-16-06C 1923X-8-06C 1063X-8-06C | 10655-8-8C 19255-8-8C 1C955-16-8C 10655-6-8C | 106LX-8-08C 192LX-8-08C 1C9LX-16-08C 106LX-12-08C |

Accessories

Technical details available in Section E.

For detailed ordering information, please consult price list or contact Parflex Division.

2240D/2248D - High Pressure Tube Cleaning Hose



Features and Accessories

- DIN EN1829-2 compliant
- 20% smaller O.D. than existing competitor products
- High pressure service for tube cleaning applications, such as, heat exchanger tube cleaning in the chemical and refining industries
- Flexible lance at working pressures of 13,000 psi and above



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2240D-02V33 | Green | 3 | 1/8 | 3.2 | 0.28 | 7.1 | 15,950 | 110.0 | 2.36 | 60 | 0.05 | 0.07 | PL |
| 2240D-025V36 | Yellow | 4 | 5/32 | 4.0 | 0.30 | 7.7 | 17,400 | 120.0 | 2.95 | 75 | 0.07 | 0.10 | AX |
| 2240D-025V33 | Green | 4 | 5/32 | 4.0 | 0.30 | 7.7 | 17,400 | 120.0 | 2.95 | 75 | 0.07 | 0.10 | AX |
| 2240D-03V33 | Green | 5 | 3/16 | 4.8 | 0.37 | 9.5 | 15,955 | 110.0 | 3.74 | 95 | 0.09 | 0.13 | AX/TX |
| 2240D-03V36 | Yellow | 5 | 3/16 | 4.8 | 0.37 | 9.5 | 15,955 | 110.0 | 3.74 | 95 | 0.09 | 0.13 | AX/TX |
| 2240D-04V36 | Yellow | 6 | 1/4 | 6.4 | 0.46 | 11.6 | 15,950 | 110.0 | 4.33 | 110 | 0.13 | 0.20 | NX/TX |
| 2240D-04V33 | Green | 6 | 1/4 | 6.4 | 0.46 | 11.6 | 15,950 | 110.0 | 4.33 | 110 | 0.13 | 0.20 | NX/TX |
| 2240D-05V36 | Yellow | 8 | 5/16 | 7.9 | 0.53 | 13.4 | 13,050 | 90.0 | 4.72 | 120 | 0.17 | 0.25 | TX/AX |
| 2248D-025V32 | Blue | 4 | 5/32 | 4.0 | 0.31 | 7.9 | 21,750 | 150.0 | 2.95 | 75 | 0.07 | 0.11 | TX |
| 2248D-03V32 | Blue | 5 | 3/16 | 4.8 | 0.37 | 9.5 | 20,300 | 140.0 | 3.74 | 95 | 0.09 | 0.14 | TX |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Two spiral layers of high tensile steel wire

Cover: Polyamide

Options

- Colors:
- Blue
 - Green
 - Yellow

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2240D/2248D - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2240D-02V33 | 2240D-025V3x | 2240D-03V3x | 2240D-04V3x |
|--|--|--|--|---|
| Fitting Part Numbers  | 101TX-2-02W 106TX-4-02W 1AYTX-6-02W 601PL-1-2 | 601AX-1-2A 601AX-2-2A 606AX-4-2A 6AYAX-6-2A 6EZAX-5-2A 6ZEAX-5-2A | 101TX-4-03W 106TX-6-03W 1AYTX-6-03W 601AX-2-3 | 601NX-2-4 601NX-4-4 601NX-4-4C 602NX-4-4 606NX-4-4C 606NX-6-4C 6AYNX-6-4C |
| | 2240D-05V36 | 2248D-025V32 | 2248D-03V32 | |
| | 101TX-4-05W 1YHTX-6-05W 1YHTX-6-05W-LH 601AX-4-5 601AX-6-5 | 101TX-1-025 101TX-2-025 102TX-1-025 1YHTX-4-025 | 101TX-1-03 101TX-2-03 101TX-4-03 102TX-2-03 1YHTX-6-03 | |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | |
|------------------------------|------------------------|-----------------|-----------|
| # | Containment Grip | Bend Restrictor | Hose Stop |
| 2240D-03V3x | MCG001SS MCGHS10-15 | N/A | N/A |
| 2240D-04V3x | MCG001SS MCGHS10-15 | MBR008 | N/A |
| 2240D-05V36 | MCG001SS MCGHS10-15 | N/A | N/A |
| 2240D-025V3x 2248D-025V32 | N/A | N/A | AH-025S |
| 2240D-03V3x 2248D-03V32 | N/A | N/A | AH-03S |
| 2240D-04V3x | N/A | N/A | AH-04S |
| 2240D-05V36 | N/A | N/A | AH-05S |

For detailed ordering information, please consult price list or contact Parflex Division.

2244N - High Pressure Hose

Features and Applications

- High pressure waterblast service for the construction and shipbuilding industries
- General industrial cleaning applications — mainly used to remove different kinds of dirt accumulation, or materials from various surfaces, such as those in tanks, from concrete, asphalt, etc.



Markets Certifications

- Waterblast
- DIN EN1829-2 compliant

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| 2244N-08V16W | Yellow | 12 | 1/2 | 12.7 | 0.90 | 22.9 | 12,760 | 88.0 | 5.91 | 150 | 0.54 | 0.80 | LX |



Markets

- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| 2244N-025V00 | Black | 4 | 5/32 | 4.0 | 0.38 | 9.6 | 10,875 | 75.0 | 2.17 | 55 | 0.13 | 0.19 | 8X |
| 2244N-08V71 | Black | 12 | 1/2 | 12.7 | 0.89 | 22.7 | 7,975 | 55.0 | 5.91 | 150 | 0.54 | 0.80 | 8X |

Construction

Core Tube: Polyamide (V00)

Polyamide 11, methanol washed (V71)

Reinforcement: Two spiral layers, and one braided layer of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Black

Temperature Range

-08 hoses: +14°F to +158°F (-10°C to +70°C)

-025 hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2244N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2244N-08V16W | 2244N-025V00 | 2244N-08V71 |
|---|----------------------------|---|---|
|  Fitting Part Numbers | 1AYLX-11-08 1C9LX-16-08 | 6018X-2-2A 6018X-2-2AC 6018X-4-2AC 6068X-4-2AC 6AY8X-6-2AC 1018X-4-025 | 6018X-8-8C 6068X-8-8C 6AY8X-11-8C |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | | |
|--------------|---------------------------|---------------|--------------|------------------|-----------------|
| # | Heavy Duty Abrasion Cover | Cover Sleeves | Spring Guard | Containment Grip | Bend Restrictor |
| 2244N-025V00 | N/A | N/A | N/A | N/A | MBR008 |
| 2244N-08V71 | MHDC018 | 216-200-18 | MSG4113 | MCG005SS | N/A |

2370N - High Pressure Hose

Features and Applications

- High pressure service for use with petroleum or synthetic hydraulic fluids in hydraulic systems
- Especially suitable for hydraulic tools, clamps, rescue equipment
- Suitable for use with phosphate ester fluid



Markets

- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2370N-08V30 | Black | 12 | 1/2 | 12.7 | 0.79 | 20.0 | 5,075 | 35.0 | 5.90 | 150 | 0.28 | 0.42 | 9X / NX |

Construction

Core Tube: Polyamide

Reinforcement: Two spiral layers of high tensile steel wire and one braided layer of iron wire

Cover: Polyamide

Options

Colors: ● Black

Temperature Range

-40°F to +140°F (-40°C to +60°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2370N - Fittings and Accessories

Fittings

Technical details available in Section B.

| | |
|--|---|
| Hose Part # | 2370N-08V30 |
| Fitting Part Numbers  | 1019X-8-08 1019X-8-08C 1069X-8-08 1069X-8-08C 1069X-10-08 1C99X-16-08 10C9X-16-08 |

Accessories

Technical details available in Section E.

2380F - High Pressure Hose

Features and Applications

- FEP inner core offers exceptional chemical resistance
- Inert to virtually all hydraulic and chemical fluids
- Suitable for applications with aggressive fluids
- Glue applications in the automotive industry
- Material lines for temperatures below +80°C



Markets

- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2380F-08V07 | Gray | 12 | 1/2 | 12.7 | 0.81 | 20.5 | 4,712 | 32.5 | 5.51 | 140 | 0.34 | 0.58 | NX |

Construction

Core Tube: Fluorinated ethylene propylene (FEP)
 Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire
 Cover: Polyurethane

Options

Colors: ● Gray

Temperature Range

-40°F to +176°F (-40°C to +80°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2380F - Fittings and Accessories

Fittings

Technical details available in Section B.

| | |
|--|--------------------------|
| Hose Part # | 2380F-08V07 |
| Fitting Part Numbers  | 106NX-8-08 101NX-8-08 |

Accessories

Technical details available in Section E.

2380N....W- High Pressure Waterblast Hose

Features and Applications



- DIN EN1829-2 compliant
- Low volumetric expansion
- Available in long lengths
- Replaces high pressure, rigid tubing where vibration and routing constraints are issues
- High pressure service in construction and shipbuilding industries
- General industrial cleaning applications



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2380N-04V03W | Green | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 15,950 | 110.0 | 2.80 | 70 | 0.18 | 0.27 | KY |
| 2380N-04V06W | Yellow | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 15,950 | 110.0 | 2.80 | 70 | 0.18 | 0.27 | KY |
| 2380N-05V06W | Yellow | 8 | 5/16 | 7.9 | 0.62 | 15.8 | 14,500 | 100.0 | 3.54 | 90 | 0.24 | 0.35 | KY |

Construction

Core Tube: Polyamide

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Green
● Yellow

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2380N...W - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2380N-04V0xW | 2380N-05V0xW |
|---|--|--|
| Fitting Part Numbers  | 101KY-2-04 101KY-4-04 1AYKY-6-04 | 101KY-4-05 101KY-6-05 1AYKY-8-05 1Y4KY-9-05 |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | | | |
|--------------|---------------------------|---------------|--------------|------------------------|-----------------|-----------|
| # | Heavy Duty Abrasion Cover | Cover Sleeves | Spring Guard | Containment Grip | Bend Restrictor | Hose Stop |
| 2380N-05V0xW | MHDC012 | 510-A-500-12 | N/A | MCG001SS MCGHS10-15 | MBR012 | AH-06S |

2380N - High Pressure Hose

Features and Applications



- Small diameters available
- Low volumetric expansion
- Available in long lengths and twinline construction
- Replaces high pressure, rigid tubing where vibration and routing constraints are issues
- Used for hydraulic controls and test systems with synthetic fluids
- Portable hydraulic tools
- V91 hoses are for offshore oil applications (control fluids, acidizing, methanol injection and well stimulation)
- V3x hose can be used with phosphate ester fluids



Markets

- Oil & Gas
- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2380N-04V00 | Black | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 10,150 | 70.0 | 2.80 | 70 | 0.27 | 0.18 | 8X |
| 2380N-04V02 | Blue | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 10,150 | 70.0 | 2.80 | 70 | 0.27 | 0.18 | 8X |
| 2380N-04V04 | Red | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 10,150 | 70.0 | 2.80 | 70 | 0.27 | 0.18 | 8X |
| 2380N-04V06 | Yellow | 6 | 1/4 | 6.4 | 0.53 | 13.4 | 10,150 | 70.0 | 2.80 | 70 | 0.18 | 0.27 | 8X |
| 2380N-04V66 | Yellow | 6 | 1/4 | 6.4 | 0.53 | 13.4 | 10,150 | 70.0 | 2.80 | 70 | 0.18 | 0.27 | 8X/NX |
| 2380N-04V91 | Black | 6 | 1/4 | 6.4 | 0.53 | 13.4 | 10,000 | 69.0 | 2.80 | 70 | 0.18 | 0.27 | 8X |
| 2380N-05V00 | Black | 8 | 5/16 | 7.9 | 0.62 | 15.8 | 9,060 | 62.5 | 3.54 | 90 | 0.24 | 0.35 | LX |
| 2380N-16V12 | Blue | 25 | 1 | 25.4 | 1.45 | 36.8 | 5,510 | 38.0 | 11.42 | 290 | 1.00 | 1.49 | 8X |
| 2380N-16V16 | Yellow | 25 | 1 | 25.4 | 1.45 | 36.8 | 5,510 | 38.0 | 11.42 | 290 | 1.00 | 1.49 | 8X |

Construction

Core Tube: Polyamide

V71 - Polyamide, Methanol washed

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: V0x — Polyurethane

V1x — Polyurethane

V3x — Polyamide

V91 — Polyamide

V66 — Polyamide

Temperature Range

-40°F to +212°F (-40°C to +100°C)

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Options

Colors: ● Black

● Blue


● Red

● Yellow

2380N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2380N-04V0x | 2380N-04V66 | 2380N-04V91 | 2380N-05V00 | 2380N-16V1x | |
|--|--|---|--|---|--|---|
| Fitting Part Numbers  | 1018X-6-04 1018X-6-04C 1018X-8-04 1018X-4-04C 1C38X-8-04 1D98X-4-04 1D98X-4-04C 1AY8X-6-04 1AY8X-6-04C | 1928X-4-04 1928X-4-04C 1068X-4-04 1068X-4-04C 1068X-6-04 1068X-6-04C 1028X-4-04 1028X-4-04C 1MB8X-6-4 | 601NX-2-4 601NX-4-4 601NX-4-4C 606NX-4-4C 606NX-6-4C 6AYNX-6-4C | 1068X-4-04C 1068X-6-04C 1018X-6-04C 1AY8X-6-04C 1928X-4-04C 1018X-4-04C 15Y8X-6-04C | 601LX-4-5 601LX-4-5C 601LX-6-5 601LX-6-5C 6AYLX-8-5C 606LX-6-5C 606LX-8-5C | 1068X-16-16C-SUBSEA 1378X-16-16C-SUBSEA 1398X-16-16C-SUBSEA 19G8X-16-16C-SUBSEA 19G8X-24-16C-SUBSEA 19M8X-16-16C-SUBSEA 19M8X-24-16C-SUBSEA 19W8X-16-16C-SUBSEA 19W8X-24-16C-SUBSEA |

Accessories


Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | | |
|-------------|---------------------------|---------------|--------------|------------------------|-----------------|
| # | Heavy Duty Abrasion Cover | Cover Sleeves | Spring Guard | Containment Grip | Bend Restrictor |
| 2380N-04V0x | MHDC012 | 510-A-500-12 | MSG2106 | MCG001SS MCGHS10-15 | MBR010 |
| 2380N-04V66 | MHDC010 | 508-J-500-10 | N/A | MCG001SS MCGHS10-15 | MBR009 |
| 2380N-04V91 | MHDC012 | 510-A-500-12 | MSG2106 | MCG001SS MCGHS10-15 | MBR010 |

For detailed ordering information, please consult price list or contact Parflex Division.

2388N - High Pressure Hose

Features and Applications

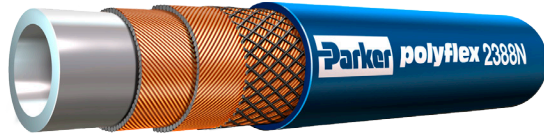

- Up to 35% lighter weight for a 20 meter hose assembly when compared to rubber hose
- High kink resistance
- Waterblast hoses are compliant with DIN EN 1829-2
- Hoses indicated for waterblast applications intended for construction, ship building and general industrial cleaning applications
- Particularly well-suited for the removal of dirt, rust and paint from the surface of ship decks, tanks, concrete and asphalt
- Grease injection hose
- High flexibility for hydraulic tools, rescue equipment, straightening benches and clamps



Markets Certifications

- Waterblast
- DIN EN1829-2 compliant

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2388N-04V13W | Green | 6 | 1/4 | 6.4 | 0.53 | 13.4 | 18,560 | 128.0 | 3.15 | 80 | 0.20 | 0.30 | KY |
| 2388N-08V13W | Green | 12 | 1/2 | 12.7 | 0.91 | 23.1 | 15,950 | 110.0 | 4.72 | 120 | 0.54 | 0.80 | BS |



Markets

- Oil & Gas
- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|-----|--------------|------|--------------------------|------|---------------------|----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2388N-04V14 | Red | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 11,600 | 80.0 | 3.15 | 80 | 0.20 | 0.30 | 8X |

Construction

Core Tube: Polyamide

Reinforcement: Two spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

- Colors: ● Green
● Red

Temperature Range

Waterblast hoses: 14°F to +158°F (-10°C to +70°C)

Hydraulic hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2388N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2388N-04V1xW | 2388N-08V1xW | 2388N-04V14 |
|--|--|---|--|
| Fitting Part Numbers  | 101KY-2-04 101KY-4-04 101KY-6-04 15YKY-6-04 1AYKY-6-04 | 1AYBS-11-08 1AYBS-11-08C 101BS-8-08 101BS-8-08C 1C9BS-16-08 | 1018X-4-04 1068X-4-04 1068X-6-04 1018X-6-04C 15Y8X-6-04C 1928X-4-04 1AY8X-6-04 1C38X-8-04 1D98X-4-04 1MB8X-6-04 |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | Hose Stop |
|--------------|---------------------------|---------------|-----------|
| | Heavy Duty Abrasion Cover | Cover Sleeves | |
| 2388N-04V1xW | MHDC012 | 510-A-500-12 | NA |
| 2388N-08V1xW | MHDC018 | 216-200-18 | AH-08S |
| 2388N-04V14 | MHDC012 | 510-A-500-12 | NA |

2390N - High Pressure Hose

Features and Applications



- Low dimensional change under pressure resulting in excellent response times
- Smooth bore for low pressure drop
- Meets or exceeds the performance requirements of ISO 13628-5
- Low volumetric expansion hose
- Used for subsea hydraulic controls — long-length hot line hoses and stack control lines for BOP systems
- Portable hydraulic tools



Markets

- Oil & Gas
- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2390N-04V00 | Black | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 7,107 | 49.0 | 2.76 | 70 | 0.17 | 0.25 | 8X/9X/E2/E3 |
| 2390N-04V12 | Blue | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 7,107 | 49.0 | 2.76 | 70 | 0.17 | 0.25 | 8X/9X/E2/E3 |
| 2390N-04V16 | Yellow | 6 | 1/4 | 6.4 | 0.52 | 13.3 | 7,107 | 49.0 | 2.76 | 70 | 0.17 | 0.25 | 8X/9X/E2/E3 |
| 2390N-06V13 | Green | 10 | 3/8 | 9.5 | 0.71 | 18.1 | 6,450 | 44.5 | 4.72 | 120 | 0.28 | 0.41 | 9X |
| 2390N-08V12 | Blue | 12 | 1/2 | 12.7 | 0.83 | 21.2 | 6,017 | 41.5 | 5.91 | 150 | 0.36 | 0.54 | 9X/E2/E3 |
| 2390N-08V13 | Green | 12 | 1/2 | 12.7 | 0.83 | 21.2 | 6,017 | 41.5 | 5.91 | 150 | 0.36 | 0.54 | 9X/E2/E3 |
| 2390N-08V16 | Yellow | 12 | 1/2 | 12.7 | 0.83 | 21.2 | 6,017 | 41.5 | 5.91 | 150 | 0.36 | 0.54 | 9X/E2/E3 |
| 2390N-16V12 | Blue | 25 | 1 | 25.4 | 1.38 | 35.0 | 4,060 | 28.0 | 11.02 | 280 | 0.79 | 1.17 | 9X/E2/E3 |
| 2390N-16V13 | Green | 25 | 1 | 25.4 | 1.38 | 35.0 | 4,060 | 28.0 | 11.02 | 280 | 0.79 | 1.17 | 9X/E2/E3 |
| 2390N-16V16 | Yellow | 25 | 1 | 25.4 | 1.38 | 35.0 | 4,060 | 28.0 | 11.02 | 280 | 0.79 | 1.17 | 9X/E2/E3 |

Construction

Core Tube: Polyamide

Reinforcement: Two closed spiral layers and two open spiral layers of high tensile steel wire

Cover: V1x - Seawater-resistant Polyurethane

V00 - Polyurethane

V91 - PA 12

Options

Colors: ● Blue
● Yellow
● Green

Temperature Range

-40°F to +212°F (-40°C to +100°C)

V91 hose: max. of +158°F (+70°C) when used with water/glycol and methanol-based fluids


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2390N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2390N-04Vxx | 2390N-06V13 | 2390N-08V1x | 2390N-16V1x |
|--|--|---|---|--|
| Fitting Part Numbers  | 1018X-6-4 1D98X-4-4 E206JCC3 E206JEC3 6019X-4-4C 6069X-4-4C 6069X-6-4C 6AY9X-6-4C 139E3-4-4C 139E3-6-4C 137E3-4-4C 137E3-6-4C 106E3-4-4C 106E3-6-4C | 6019X-6-6 6019X-6-6C 6019X-8-6 6019X-8-6C 6069X-6-6C-SUBSEA 6069X-8-6C 6AY9X-8-6C | 6019X-8-8 6019X-8-8C 6069X-8-8C 6AY9X-11-8C E213JFC4 19WE3-8-8C 19WE3-16-8C 19ME3-8-8C 19ME3-16-8C 19GE3-8-8C 19GE3-16-8C 106E3-8-8C 139E3-8-8C-411 137E3-8-8C-411 | 6019X-16-16C 6069X-16-16C 6AY9X-16-16C E225JIC3 19WE3-16-16C 19WE3-24-16C 19ME3-16-16C 19ME3-24-16C 19GE3-16-16C 19GE3-24-16C 139E3-16-16C-411 137E3-16-16C-411 106E3-16-16C |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | |
|-------------|---------------------------|---------------|------------------------------------|
| | Heavy Duty Abrasion Cover | Cover Sleeves | Containment Grip |
| 2390N-04Vxx | MHDC010 | 508-J-500-10 | MCG001SS |
| 2390N-08V1x | MHDC016 | 216-200-18 | MCG005SS MCGHS20-30 |
| 2390N-12V03 | NA | 220-200-22 | MCG002SS MCG005SS MCGHS20-30 |
| 2390N-16V1x | MHDC024 | 220-200-22 | MCG003SS MCGHS30-40 |

For detailed ordering information, please consult price list or contact Parflex Division.

2440D/2448D - Ultra High Pressure Water Jetting Hose



Features and Applications

- DIN EN1829-2 compliant
- High pressure service for tube cleaning applications such as heat exchangers in the chemical and oil refining industries
- Application as flexible lance
- Ultra-high pressure service for the construction and shipbuilding industries and for general purpose industrial cleaning applications
- Hydrodemolition and removal of accumulated dirt and material from surfaces such as concrete, asphalt and tanks



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2440D-02V37 | Gray | 3 | 1/8 | 3.2 | 0.31 | 7.9 | 30,000 | 207.0 | 3.94 | 100 | 0.08 | 0.12 | LX |
| 2440D-025V37 | Gray | 4 | 5/32 | 4.0 | 0.41 | 10.5 | 31,900 | 220.0 | 3.94 | 100 | 0.14 | 0.21 | LX |
| 2440D-03V32 | Blue | 5 | 3/16 | 4.8 | 0.45 | 11.5 | 26,100 | 180.0 | 5.12 | 130 | 0.19 | 0.28 | LX |
| 2440D-04V32 | Blue | 6 | 1/4 | 6.4 | 0.49 | 12.5 | 23,780 | 164.0 | 6.10 | 155 | 0.22 | 0.33 | LX |
| 2440D-05V32 | Blue | 8 | 5/16 | 7.9 | 0.59 | 15.1 | 21,750 | 150.0 | 6.89 | 175 | 0.30 | 0.44 | LX |
| 2448D-025V35 | Orange | 4 | 5/32 | 4.0 | 0.39 | 9.9 | 43,645 | 301.0 | 4.72 | 120 | 0.15 | 0.22 | LX |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Four spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

- Colors:**
- Blue
 - Gray
 - Orange

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2440D/2448D - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2440D-02V3x | 2440D-025V37 | 2440D-03V32 | | 2440D-04V32 |
|--|---|--|---|---|--|
| Fitting Part Numbers  | 1AYLX-6-02 1HYLX-4-02 1HYLX-4-02-LH 1Y4LX-4-02 1YHLX-4-02 1YHLX-4-02-LH 6YHLX-4-02-PL 6AYLX-6-02 | 601LX-2-2AC 6AYLX-6-2AC 6HYLX-4-2AC-PL 6HYLX-4-2AC-PL-LH 6Y4LX-4-2AC 6Y4LX-6-2AC 6YHLX-4-2AC-PL 6YHLX-4-2AC-PL-LH | 601LX-4-3 65YLX-6-3 65YLX-6-3C 66YLX-4-3 66YLX-4-3C 692LX-4-3C 6AYLX-6-3 6AYLX-6-3C 6HYLX-4-3C-PL 6HYLX-4-3C-PL-LH | 6HYLX-6-3C-PL 6HYLX-6-3C-PL-LH 6Y4LX-6-3C 6Y4LX-9-3C 6YHLX-4-3C-PL 6YHLX-4-3C-PL-LH 6YHLX-6-3C-PL 6YHLX-6-3C-PL-LH | 101LX-4-04 101LX-6-04 1AYLX-6-04 1Y2LX-6-04 |
| | 2440D-05V32 | | 2448D-025V3x | | |
| 601LX-4-5 601LX-4-5C 601LX-6-5 601LX-6-5C 692LX-6-5C 6AYLX-8-5C | 6HYLX-9-5C-PL-LH 6Y2LX-12-5C 6Y2LX-9-5C 6YHLX-9-5C-PL 6YHLX-9-5C-PL-LH 6Y2HX-9-5C-LONG 6Y2HX-9-5C-THD | 6HYLX-4-2AC-PL 6HYLX-4-2AC-PL-LH 6YHLX-4-2AC-PL 6YHLX-4-2AC-PL-LH | | | |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers |
|------------------------------|------------------------|
| | Hose Stop |
| 2448D-025V35 2440D-025V37 | AH-04S |
| 2440D-03V32 2440D-04V32 | AH-05S |
| 2440D-05V32 | AH-06S |

For detailed ordering information, please consult price list or contact Parflex Division.

2440N - Ultra High Pressure Waterblast Hose



Features and Applications

- DIN EN1829-2 compliant
- High pressure, low volumetric expansion hose
- Flexible, chemical-resistant, lightweight alternative to steel pipe and rubber hose
- Ultra high pressure service for the construction and shipbuilding industries and general industrial cleaning applications
- Mainly used in hydrodemolition and to remove different kinds of dirt accumulation, or materials from various surfaces
- Waterjet technology, delivery hose



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2440N-04V32 | Blue | 6 | 1/4 | 6.4 | 0.51 | 13.0 | 20,300 | 140.0 | 6.10 | 155 | 0.21 | 0.31 | LX |
| 2440N-06V32 | Blue | 10 | 3/8 | 9.5 | 0.77 | 19.5 | 20,300 | 140.0 | 7.48 | 190 | 0.49 | 0.73 | LX |
| 2440N-08V32 | Blue | 12 | 1/2 | 12.7 | 0.89 | 22.7 | 20,300 | 140.0 | 7.87 | 200 | 0.63 | 0.94 | LX |
| 2440N-12V36 | Yellow | 20 | 3/4 | 19.0 | 1.19 | 30.2 | 14,500 | 100.0 | 9.84 | 250 | 0.98 | 1.46 | LX |
| 2440N-16V36 | Yellow | 25 | 1 | 25.4 | 1.46 | 37.2 | 13,050 | 90.0 | 11.81 | 300 | 1.34 | 2.00 | LX |

Construction

Core Tube: Polyamide

Reinforcement: Four spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Blue
● Yellow

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2440N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2440N-04V32 | 2440N-06V32 | 2440N-08V3x | 2440N-12V3x | 2440N-16V3x | |
|--|---|--|--|--|--|--|
| Fitting Part Numbers  | 6AYLX-6-4 6AYLX-6-4C 6AYLX-6-4C-SD 601LX-4-4 601LX-4-4C 65YLX-6-4 65YLX-6-4C 65YLX-6-4 65YLX-6-4C | 692LX-4-4 6YHLX-6-4C 6YHLX-6-4C-LH 6YHLX-6-4C-PL 6YHLX-6-4C-PL-LH 6YHLX-6-4C-PL 6YHLX-6-4C-PL-LH | 6AYLX-8-6C 6Y2LX-9-6C 1YHLX-9-06SC | 601LX-8-8 601LX-8-8C 6AYLX-11-8C 6C9LX-16-8C 6Y2LX-12-8C 6Y2LX-9-8C | 601LX-12-12C 601LX-16-12C 606LX-16-12C 6AYLX-16-12C 6C9LX-25-12C 6Y2LX-16-12C | 601LX-16-16C 606LX-16-16C 6AYLX-16-16C 6C9LX-30-16C |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | |
|-------------|---------------------------|---------------|--------------|------------------------|
| # | Heavy Duty Abrasion Cover | Cover Sleeves | Spring Guard | Containment Grip |
| 2440N-04V32 | MHDC012 | 510-A-500-12 | NA | NA |
| 2440N-06V32 | MHDC016 | 412-400 | NA | NA |
| 2440N-08V3x | MHDC018 | 216-200-18 | MSG4113 | MCGHS20-30 |
| 2440N-12V3x | MHDC024 | 220-200-22 | MSG4120 | MCG002SS MCGHS30-40 |
| 2440N-16V3x | MHDC026 | 520-A-500-26 | MSG4125 | MCG003SS MCGHS30-40 |

For detailed ordering information, please consult price list or contact Parflex Division.

2440N/2448N - Ultra High Pressure Hose

Features and Applications

- Compliant with ISO 13628-5
- High pressure, low volumetric expansion hose
- Flexible, chemical-resistant, lightweight alternative to steel pipe and rubber hose
- V91 hoses are used in offshore applications such as, control fluids, acidizing, methanol injection and well stimulation



Markets

- Oil & Gas
- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-----------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2440N-04V91 | Black | 6 | 1/4 | 6.4 | 0.52 | 13.1 | 12,500 | 87.5 | 5.90 | 150 | 0.21 | 0.31 | LX |
| 2440N-06V91 | Black | 10 | 3/8 | 9.5 | 0.77 | 19.5 | 12,688 | 87.5 | 7.48 | 190 | 0.49 | 0.73 | LX |
| 2440N-08V91 | Black | 12 | 1/2 | 12.7 | 0.89 | 22.7 | 11,745 | 81.0 | 7.87 | 200 | 0.63 | 0.94 | LX |
| 2440N-12V91 | Black | 20 | 3/4 | 19.0 | 1.19 | 30.2 | 10,000 | 69.0 | 9.84 | 250 | 0.98 | 1.46 | LX |
| 2440N-16V91 | Black | 25 | 1 | 25.4 | 1.46 | 37.2 | 8,120 | 56.0 | 11.81 | 300 | 1.34 | 2.00 | LX |
| 2440N-16V91-10K | Black | 25 | 1 | 25.4 | 1.47 | 37.2 | 10,000 | 69.0 | 11.81 | 300 | 1.34 | 2.00 | LX |
| 2448N-04V91 | Black | 6 | 1/4 | 6.4 | 0.54 | 13.7 | 15,000 | 103.5 | 5.90 | 150 | 0.26 | 0.38 | 8X |

Construction

Core Tube: Methanol-washed PA11

Reinforcement: Four spiral layers of maximum tensile steel wire

Cover: Nylon 12

Options

Colors: ● Black

Temperature Range

-40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2440N/2448N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2440N-04V91 | 2440N-06V91 | 2440N-08V91 | 2440N-12V91 |
|--|--|---|--|---|
| Fitting Part Numbers  | 1AYLX-6-04C 101LX-4-04C 106LX-6-04C 15YLX-9-04C 6AYLX-6-4C 65YLX-6-4C 601LX-4-4C 6AYLX-6-4C-SD | 1AYLX-8-06C4462 106LX-8-06C4462 106LX-6-06C4462 1Y2LX-9-06C4462 1Y2LX-6-06C4462 | 106LX-8-08C 101LX-8-08C 1AYLX-11-08C 1AYLX-11-08C4462 1C9LX-16-08C 1Y2LX-12-08C 606LX-8-8C | 601LX-12-12C 601LX-16-12C 606LX-16-12C 6AYLX-16-12C 6C9LX-25-12C 6Y2LX-16-12C 6AYLX-16-12C-SD |
| 2440N-04V3x | 2440N-16V91 | 2440N-16...10K | 2448N-04V91 | |
| 1AYLX-6-04C 101LX-4-04C 15YLX-9-04C | 601LX-16-16C 606LX-16-16C 6AYLX-16-16C 6AYLX-16-16C-SD 6AYLX-16-16-HCL 6C9LX-30-16C 6HELX-16-16-HCL 6HNLX-16-16-HCL | 1062X-16-16C4462 1HNLX-32-16C4462 1Y2LX-16-16C4462 | 1018X-4-04C 1018X-6-04C 1068X-4-04C 1068X-6-04C 1928X-4-04C 1AY8X-6-04C 1Y28X-6-04C 1Y28X-9-04C | |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | |
|-------------|---------------------------|---------------|--------------|------------------------|
| | Heavy Duty Abrasion Cover | Cover Sleeves | Spring Guard | Containment Grip |
| 2440N-04Vxx | MHDC010 | 508-J-500-10 | N/A | MCG001SS MCGHS10-15 |
| 2440N-06V91 | MHDC016 | 216-200-18 | N/A | MCGHS15-20 |
| 2440N-08V91 | MHDC018 | 216-200-18 | N/A | MCGHS20-30 |
| 2440N-12V91 | MHDC024 | 220-200-22 | MSG4120 | MCG002SS MCGHS30-40 |
| 2440N-16V91 | MHDC026 | 520-A-500-26 | MSG4125 | MCG003SS MCGHS30-40 |

For detailed ordering information, please consult price list or contact Parflex Division.

2580N - Ultra High Pressure Waterblast Hose



Features and Applications

- DIN EN1829-2 compliant
- MSHA hose meets requirements of MDG 41
- Ultra high pressure service for the construction and shipbuilding industries
- General industrial cleaning applications
- Mainly used in hydrodemolition and to remove different kinds of dirt accumulation, or materials from various surfaces, such as those in tanks, from concrete, asphalt, etc.
- MSHA - Maximum pressure service for use with petroleum or synthetic hydraulic fluids



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2580N-06V12 | Blue | 10 | 3/8 | 9.5 | 0.85 | 21.6 | 23,200 | 160.0 | 3.74 | 95 | 0.63 | 0.94 | BL |
| 2580N-08V12 | Blue | 12 | 1/2 | 12.7 | 0.99 | 25.2 | 20,300 | 140.0 | 5.91 | 150 | 1.19 | 0.80 | BL |
| 2580N-12V13 | Green | 20 | 3/4 | 19.0 | 1.29 | 32.8 | 17,400 | 120.0 | 6.69 | 170 | 1.18 | 1.76 | BL |



Markets

- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|------------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2580N-08V10-MSHA | Black | 12 | 1/2 | 12.7 | 0.99 | 25.2 | 10,150 | 70.0 | 4.33 | 110 | 0.80 | 1.19 | BL |

Construction

Core Tube: Polyamide

Reinforcement: Four spiral layers and two open spiral layers of high tensile steel wire

Cover: Polyurethane

Options

- Colors:
- Blue
 - Red
 - Green
 - Black

Temperature Range

Waterblast hoses: +14°F to +158°F (-10°C to +70°C)

MSHA hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2580N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2580N-06V12 | 2580N-08V12 | 2580N-12V1x | 2580N-08V10-MSHA |
|--|---|---|----------------------------|--|
| Fitting Part Numbers  | 101BL-6-06 1AYBL-11-06 1AYBL-8-06 1C9BL-14-06 1C9BL-16-06 | 1AYBL-11-08 1AYBL-11-08C 1C9BL-14-08 1C9BL-16-08 1C9BL-25-08 101BL-8-08 101BL-8-08C | 101BL-12-12 1C9BL-25-12 | 101BL-8-08 101BL-8-08C 1AYBL-11-08 1AYBL-11-08C |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers |
|-------------|------------------------|
| # | Hose Stop |
| 2580N-08V12 | AH-08S |
| 2580N-12V13 | AH-12S |

2640D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra high pressure service for the construction and shipbuilding industries
- General industrial cleaning applications
- Hydrodemolition



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | ○ | | | ◎ | | ↗ | | ↘ | | lbs | kg | |
| 2640D-025V35 | Orange | 4 | 5/32 | 4.0 | 0.47 | 12.0 | 40,600 | 280.0 | 5.51 | 140 | 0.20 | 0.29 | 2X |
| 2640D-03V37 | Gray | 5 | 3/16 | 4.8 | 0.51 | 12.9 | 36,230 | 250.0 | 6.89 | 175 | 0.28 | 0.41 | 2X |
| 2640D-05V37 | Gray | 8 | 5/16 | 7.9 | 0.67 | 17.0 | 30,450 | 210.0 | 8.86 | 225 | 0.46 | 0.68 | 2X |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Orange
● Gray

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2640D - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2640D-025V3x | 2640D-03V3x | 2640D-05V37 |
|--|--|--|--|
| Fitting Part Numbers  | 16Y2X-4-025 1AY2X-6-025 1Y42X-4-025 1Y42X-6-025 | 16Y2X-4-03 1922X-4-03 1AY2X-6-03 1Y42X-4-03 1Y42X-6-03 1Y42X-9-03 | 1AY2X-13-05 1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05 |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | |
|--------------|---------------------------|---------------|------------------------|-----------|
| | Heavy Duty Abrasion Cover | Cover Sleeves | Containment Grip | Hose Stop |
| 2640D-025V3x | MHDC010 | 508-J-500-10 | MCGHS10-15 | NA |
| 2640D-03V3x | MHDC012 | 510-A-500-12 | MCG001SS MCGHS10-15 | AH-05S |
| 2640D-05V37 | NA | NA | NA | AH-06S |

For detailed ordering information, please consult price list or contact Parflex Division.

2640N/2648N - Ultra High Pressure Hose

Features and Applications



- DIN EN1829-2 compliant
- Ultra high pressure service for the construction and shipbuilding industries
- General industrial cleaning applications
- V91 hoses are used in offshore applications such as, control fluids, acidizing, methanol injection and well stimulation
- V91 hose tested according to ISO 13628-5



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2640N-08V32 | Blue | 12 | 1/2 | 12.7 | 0.96 | 24.5 | 26,100 | 180.0 | 11.42 | 290 | 0.92 | 1.37 | 5X |
| 2640N-12V32 | Blue | 20 | 3/4 | 19.0 | 1.30 | 33.0 | 20,300 | 140.0 | 13.78 | 350 | 1.45 | 2.16 | 5X |
| 2648N-16V32 | Blue | 25 | 1 | 25.4 | 1.61 | 40.8 | 21,750 | 150.0 | 15.75 | 400 | 2.08 | 3.10 | CX |



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2640N-12V91 | Black | 20 | 3/4 | 19.0 | 1.31 | 33.2 | 12,500 | 87.5 | 13.78 | 350 | 1.45 | 2.16 | 5X |

Construction

Core Tube: Polyamide

V91 - Methanol-washed PA11

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: V32 - Polyamide

V91 - Plasticized Nylon 12

Options

Colors: ● Blue

● Black

Temperature Range

Waterblast hoses: -40°F to +212°F (-40°C to +100°C),
+14°F to +158°F (-10°C to +70°C) for water

O&G hose: -40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2640N - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2640N-08V32 | 2640N-12V32 | 2640N-12V91 | 2648N-16V32 |
|--|---|---|---|----------------------------|
| Fitting Part Numbers  | 6AY5X-11-8C 6C95X-16-8C 6Y25X-12-8C 6Y25X-9-8C | 6AY5X-16-12C 6AY5X-16-12C-SD 6C95X-25-12C 6Y25X-16-12C | 6015X-12-12C 6AY5X-16-12C 6AY5X-16-12C-SD 6C95X-25-12C 6Y25X-16-12C | 1C9X-30-16W 1AYX-16-16W |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | |
|-------------|---------------------------|---------------|------------------|
| # | Heavy Duty Abrasion Cover | Cover Sleeves | Containment Grip |
| 2640N-08V32 | MHDC018 | 416-400-16 | MCGHS20-30 |
| 2640N-12V32 | MHDC024 | 220-200-22 | MCGHS30-40 |
| 2640N-12V71 | MHDC024 | 220-200-22 | MCGHS30-40 |
| 2648N-16V32 | MHDC032 | 532-500 | |

For detailed ordering information, please consult price list or contact Parflex Division.

2740D- Ultra High Pressure Waterblast Hose



Features and Applications

- DIN EN1829-2 compliant
- Small diameter, flexible hoses
- Ideal for tight routing applications
- Replaces high pressure steel tubing where flexibility and long lengths are important to minimize leak points
- Ultra high pressure waterblast lances for the construction and shipbuilding industries, common industrial cleaning applications, and high pressure tube cleaning in petrochemical and power plants
- Hydrodemolition
- Compression forming process (hydroforming) as a manufacturing procedure for truck and automotive industries
- Water Jet Cutting



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2740D-025V35 | Orange | 4 | 5/32 | 4.0 | 0.47 | 12.0 | 43,500 | 300.0 | 4.72 | 120 | 0.27 | 0.41 | 2X |
| 2740D-03V35 | Orange | 5 | 3/16 | 4.8 | 0.52 | 13.3 | 40,600 | 280.0 | 7.87 | 200 | 0.32 | 0.47 | 2X |
| 2740D-05V37 | Gray | 8 | 5/16 | 7.9 | 0.68 | 17.3 | 36,230 | 250.0 | 7.87 | 200 | 0.54 | 0.80 | 2X / HX |

Construction

Core Tube: Polyoxymethylene
 Reinforcement: Six spiral layers of maximum tensile steel wire
 Cover: Polyamide

Options

Colors: ● Orange
 ● Gray

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2740D - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2740D-025V3x | 2740D-03V3x | 2740D-05V3x |
|--|--|--|---|
| Fitting Part Numbers  | 1AY2X-6-025 1Y42X-4-025 1Y42X-6-025 16Y2X-4-025 | 16Y2X-4-03 1922X-4-03 1AY2X-6-03 1Y42X-4-03 1Y42X-6-03 1Y42X-9-03 | 1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05 1Y42X-9-05-XLT |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | | | | Hose Stop |
|--------------|---------------------------|---------------|------------------------|----------------------|---|------------|-----------|
| | Heavy Duty Abrasion Cover | Cover Sleeves | Containment Grip | Bend Stiffener | Pressure Containment Shield and Sleeves | | |
| 2740D-025V3x | MHDC010 | 508-J-500-10 | MCGHS10-15 | N/A | N/A | N/A | AH-05S |
| 2740D-03V3x | MHDC012 | 510-A-500-12 | MCG001SS MCGHS10-15 | M55STIF4 M55STIF6 | MHBS012 | 412-400 | AH-05S |
| 2740D-05V3x | MHDC016 | 216-200-18 | MCG001SS MCGHS15-20 | N/A | MHBS016 | 416-400-16 | AH-07S |

For detailed ordering information, please consult price list or contact Parflex Division.

2741D - Ultra High Pressure Waterblast Hose

Features and Applications



- DIN EN1829-2 compliant
- For very high pressure applications with working pressures up to 36,230 psi for the construction and shipbuilding industries.
- Dual outer cover for increased hose protection and easy identification of cover damage



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|----------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2741D-05V34/17 | Gray | 8 | 5/16 | 7.9 | 0.84 | 21.2 | 36,230 | 250.0 | 7.87 | 200 | 0.64 | 0.95 | 2X |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Six spiral layers of maximum tensile steel wire

Cover: Polyamide inner cover / Polyurethane outer cover

Options

Colors: ● Gray

Temperature Range

+14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2741D - Fittings and Accessories

Fittings

Technical details available in Section B.

| | |
|--|---|
| Hose Part # | 2741D-05V34/17 |
| Fitting Part Numbers  | 1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05 |

Accessories

Technical details available in Section E.

For detailed ordering information, please consult price list or contact Parflex Division.

2840D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant except 2840D-03
- Ultra high pressure waterblast hose
- Compression forming process (hydroforming)
- Water Jet Cutting



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | ○ | | | ◎ | | ↗ | | ↘ | | lbs | kg | |
| 2840D-03V34 | Red | 5 | 3/16 | 4.8 | 0.59 | 15.0 | 58,000 | 400.0 | 7.87 | 200 | 0.43 | 0.63 | 2X |
| 2840D-05V35 | Orange | 8 | 5/16 | 7.9 | 0.77 | 19.6 | 43,500 | 300.0 | 9.84 | 250 | 0.72 | 1.07 | 2X |
| 2840D-08V37 | Gray | 12 | 1/2 | 12.7 | 1.77 | 29.9 | 36,250 | 250.0 | 13.78 | 350 | 1.68 | 2.50 | WX |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Eight spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

- Colors: ● Red
● Orange
● Gray

Temperature Range

Temperature Range: +14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2840D - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2840D-03V34 | 2840D-05V3x | 2840D-08V3x |
|--|--|---|-------------|
| Fitting Part Numbers  | 1AY2X-6-03 1Y42X-4-03 1Y42X-6-03 1Y42X-9-03 | 1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05 | 6Y4WX-16-8C |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | | | | | | | |
|-------------|---------------------------|---------------|------------------|-----------------|----------------------|---|------------|-----------|
| # | Heavy Duty Abrasion Cover | Cover Sleeves | Containment Grip | Bend Restrictor | Bend Stiffener | Pressure Containment Shield and Sleeves | | Hose Stop |
| 2840D-03V34 | NA | NA | MCGHS10-15 | MBR013-B | M55STIF4 M55STIF6 | MHBS012 | 412-400 | AH-06S |
| 2840D-05V3x | MHDC016 | 216-200-18 | MCGHS15-20 | N/A | N/A | MHBS016 | 416-400-16 | AH-07S |

2841D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra high pressure hose with working pressures up to 43,500 psi for the construction and shipbuilding industries



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|----------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2841D-05V34/15 | Orange | 8 | 5/16 | 7.9 | 0.93 | 23.5 | 43,500 | 300.0 | 9.84 | 250 | 0.83 | 1.23 | 2X |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Eight spiral layers of maximum tensile steel wire

Cover: Polyamide inner cover / Polyurethane outer cover

Options

Colors: ● Orange

Temperature Range

Temperature Range: +14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2841D - Fittings and Accessories

Fittings

Technical details available in Section B.

| | |
|--|---|
| Hose Part # | 2841D-05V34/15 |
| Fitting Part Numbers  | 1AY2X-10-05-SA 1AY2X-8-05-SA 1Y42X-6-05 1Y42X-9-05 |

Accessories

| Part # | Overall Length | | R Diameter | |
|---------|----------------|----|------------|----|
| | inch | mm | inch | mm |
| KL-2841 | 1.181 | 30 | 1.1 | 28 |

NOTE: KL-2841 cover sleeve is a requirement on 2841D-05V3x/1x dual jacket hose for each fitting on every hose assembly

2849D - Ultra High Pressure Waterblast Hose

Features and Applications

- DIN EN1829-2 compliant
- Ultra-high pressure service for water jet cutting equipment with water only or with abrasive additives
- Replaces steel pipe where flexibility is important
- Compression forming (hydroforming)



Markets

- Waterblast

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|-----|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | ○ | | | ○ | | ⌚ | | ↷ | | lbs | kg | 🔌 |
| 2849D-05V34 | Red | 8 | 5/16 | 7.9 | 0.77 | 19.6 | 55,000 | 380.0 | 11.02 | 280 | 0.79 | 1.17 | WX |

Construction

Core Tube: Polyoxymethylene

Reinforcement: Eight spiral layers of maximum tensile steel wire

Cover: Polyamide

Options

Colors: ● Red

Temperature Range

Temperature Range: +14°F to +158°F (-10°C to +70°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

2849D - Fittings and Accessories

Fittings

Technical details available in Section B.

| | |
|--|--|
| Hose Part # | 2849D-05V34 |
| Fitting Part Numbers  | 6YMWX-6-5C-55 6Y4WX-9-5C-55 6AYWX-10-5C-55 |

Accessories

Technical details available in Section E.

57CR “Sea Wolf”- High Collapse Resistant Hose



Features and Applications

- Ultra-high abrasion resistant
- Suitable for marine (salt water) environment
- ISO 13628-5 “Specification for Subsea Production Control Umbilicals”, Section 7.9 Hose construction
- Smooth bore for improved flow rate and low pressure drop
- Ideal solution for subsea hydraulic lines that are not under constant system pressure.
- Hose is not recommended for high pressure pneumatic service applications



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 57CR-8-BLU | Blue | 12 | 1/2 | 12.7 | 1.18 | 30.0 | 5,000 | 34.5 | 6.25 | 159 | 0.63 | 0.94 | CR |
| 57CR-8-YEL | Yellow | 12 | 1/2 | 12.7 | 1.18 | 30.0 | 5,000 | 34.5 | 6.25 | 159 | 0.63 | 0.94 | CR |
| 57CR-16-BLU | Blue | 25 | 1 | 25.4 | 2.00 | 50.8 | 5,000 | 34.5 | 10.75 | 273 | 1.46 | 2.17 | CR |
| 57CR-16-YEL | Yellow | 25 | 1 | 25.4 | 2.00 | 50.8 | 5,000 | 34.5 | 10.75 | 273 | 1.46 | 2.17 | CR |

Construction

Core Tube: Polyamide with stainless steel helix support
 Reinforcement: High tensile strength aramid fiber
 Cover: Polyurethane

Options

Colors: ● Blue
 ● Yellow

Temperature Range

-40°F to +140°F (-40°C to +60°C) for petroleum, synthetic hydraulic oils, waer and water-based hydraulic fluid


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

57CR “Sea Wolf” - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 57CR-8-BLU | 57CR-8-YEL | 57CR-16-BLU | 57CR-16-YEL |
|---|------------|------------|--------------|--------------|
| Fitting Part Numbers  | 606CR-8-8C | 606CR-8-8C | 606CR-16-16C | 606CR-16-16C |

Accessories

Technical details available in Section E.

For detailed ordering information, please consult price list or contact Parflex Division.

HP - High Pressure Hose

HP8 - High Pressure Non-Conductive Hose



Features and Applications

- Meets or exceeds SAE J517 for less than 50 microamps leakage under 75000 volts per foot
- Specially formulated thermoplastic elastomer core tube
- For use in high pressure hydraulic and pneumatic applications and can be used with lubricating oils
- Not recommended for water blast applications or for use in static discharge applications (i.e., airless paint spray)
- Non-conductive version (HP8) used in aerial lift equipment.
- High pressure tools
- Rigging jacks
- Test apparatus
- Oilfield pressure control devices
- Offshore oil applications



Markets

- Oil & Gas
- Hydraulic

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|-----|--------------|------|--------------------------|------|---------------------|----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| HP-3 | Blue | 5 | 3/16 | 4.8 | 0.51 | 13.0 | 10,000 | 69.0 | 1.50 | 38 | 0.09 | 0.13 | HP* |
| HP-4 | Blue | 6 | 1/4 | 6.4 | 0.58 | 14.7 | 10,000 | 69.0 | 2.50 | 64 | 0.11 | 0.16 | HP* |
| HP-6 | Blue | 10 | 3/8 | 9.5 | 0.73 | 18.5 | 8,000 | 55.2 | 3.00 | 76 | 0.16 | 0.23 | HP* |
| HP8-3 | Orange | 5 | 3/16 | 4.8 | 0.51 | 13.0 | 10,000 | 69.0 | 1.50 | 38 | 0.09 | 0.13 | HP* |
| HP8-4 | Orange | 6 | 1/4 | 6.4 | 0.58 | 14.7 | 10,000 | 69.0 | 2.50 | 64 | 0.11 | 0.16 | HP* |
| HP8-6 | Orange | 10 | 3/8 | 9.5 | 0.73 | 18.5 | 8,000 | 55.2 | 3.00 | 76 | 0.16 | 0.23 | HP* |

Construction

Core Tube: Specially formulated thermoplastic elastomer

Reinforcement: High tensile strength aramid fiber

Cover: HP- perforated elastomeric cover
HP8- non-perforated elastomeric cover

Options

Colors: ● Blue
● Orange

Temperature Range

-40°F to +150°F (-40°C to +66°C) for petroleum, synthetic or water-based hydraulic fluids, pneumatic and gas service, and with some solvents and chemicals

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.


The above hoses are not intended for use in static discharge applications (i.e., airless paint spray).

*For Parkrimp crimpers, refer to the crimp instructions in CAT 4460.

HP / HP8 - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | HP-3 | HP-4 | HP-6 | HP8-3 | HP8-4 | HP8-6 |
|--|--|---|--|--|--|--|
| Fitting Part Numbers  | 101HP-2-3 101HP-4-3 101HP-6-3 106HP-4-3 | 101HP-2-4 101HP-4-4 101HP-6-4 106HP-4-4 106HP-4-4C 106HP-6-4 | 101HP-4-6 101HP-6-6 101HP-8-6 106HP-8-6C 106HP-6-6 106HP-6-6C | 101HP-2-3 101HP-4-3 101HP-6-3 106HP-4-3 | 101HP-2-4 101HP-4-3 101HP-4-4 101HP-6-4 101HP-6-4C 106HP-4-4 106HP-6-4 | 101HP-4-6 101HP-6-6 101HP-8-6 106HP-6-6 |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers |
|-------------|------------------------------|
| # | High Pressure Guard Kit |
| HP-3 | HPG3-12K HPG3-23K |
| HP-4 | HPG4-12K HPG4-23K |
| HP-6 | HPG6-12K HPG6-23K |
| HP8-3 | HPG3-12K-ORG HPG3-23K-ORG |
| HP8-4 | HPG4-12K-ORG HPG4-23K-ORG |
| HP8-6 | HPG6-12K-ORG HPG6-23K-ORG |

For detailed ordering information, please consult price list or contact Parflex Division.

Black Eagle- 1-1/2" Oilfield Service Hose

Features and Applications

- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Compact design - smaller O.D. than flexible pipe
- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- For oilfield services such as: cementing, water and gas injection hose, acidizing, mud circulation



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-----------------|--------------|--------------|-------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | ○ | | | ◎ | | ⤴ | | ⤵ | | lbs | kg | 🔌 |
| 2640N-24V80 | Black | 40 | 1-1/2 | 38.1 | 2.78 | 70.5 | 10,000 | 69.0 | 19.69 | 500 | 4.84 | 7.20 | 5X |
| 2640N-24V80-15K | Black | 40 | 1-1/2 | 38.1 | 2.60 | 66.0 | 15,000 | 103.5 | 19.69 | 500 | 4.37 | 6.50 | 5X |

Construction

Core Tube: Polyamide 11, methanol washed
 Reinforcement: 6 layers of high tensile steel wire
 Cover: Extra thick dual layer polyurethane

Options

Colors: ● Black w/ ColorGard™ red inner sheath

Temperature Range

-40°F to +158°F (-40°C to +70°C),
 15K hose can be used intermittently at +212°F (+100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Black Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

| | | |
|--|---|--|
| Hose Part # | 2640N-24V80 | 2640N-24V80-15K |
| Fitting Part Numbers  | 6015X-32-24-TC 6HE5X-32-24-FLATTC 6HE5X-32-24-SEGTC 6HN5X-32-24-TC | 1HN5X-32-24C4462-KOP2 1HE5X-32-24C4462-KOP2 |

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | |
|-----------------|------------------------|-------------|
| | Containment Grip | Heat Shrink |
| 2640N-24V80 | MCGHS3295-SS | HDT4500-48A |
| 2640N-24V80-15K | N/A | N/A |

For detailed ordering information, please consult price list or contact Parflex Division.

Black Eagle- 2" Oilfield Service Hose



Features

- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Compact design - smaller O.D. than flexible pipe
- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- *DNV Type Approval P 14038 acc. to API 7K and API 17J with BL Fittings
- For oilfield services such as: cementing, water and gas injection hose, acidizing, mud circulation



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|--------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|-------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2448N-32V80* | Black | 50 | 2 | 50.8 | 3.17 | 80.5 | 5,000 | 34.5 | 20 | 508 | 5.71 | 8.50 | 5X |
| 2580N-32V80* | Black | 50 | 2 | 50.8 | 3.33 | 84.5 | 10,000 | 69.0 | 32 | 813 | 6.32 | 9.40 | 5X |
| 2648N-32V80 | Black | 50 | 2 | 50.8 | 3.39 | 86.0 | 15,000 | 103.5 | 31 | 787 | 8.13 | 12.10 | CX |

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement:

2448N - 4 spiral layers of high tensile steel wire

2580N - 4 spiral layers and 2 open spiral layers high tensile steel wire

2648N - 6 spiral layers of high tensile steel wire

Cover: Extra thick dual layer polyurethane

Temperature Range

-40°F to +158°F (-40°C to +70°C)

Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.


Options

Colors: ● Black w/ ColorGard™ red inner sheath

Black Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2448N-32V80 | 2580N-32V80 | 2648N-32V80 |
|--|-------------|--|---------------------------------|
|  Fitting Part Numbers 6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC | | *6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC *6HB5X-32-32-TC-FLG *6HB5X-32-32-TC 6HB5X-32-32-TC-FLG-10K 6HB5X-32-32-TC-10K *6HB5X-41-32-TC *6HB5X-41-32-TC-FLG | 1HECX-32-32-FLAT 1HNCX-32-32 |

*Working pressures of these hose assemblies is 5,000 psi

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | |
|-------------|------------------------|-------------|
| | Containment Grip | Heat Shrink |
| 2448N-32V80 | MCGHS3295-SS | HDT4500-48A |
| 2580N-32V80 | MCGHS3295-SS | HDT4500-48A |
| 2648N-32V80 | N/A | N/A |

For detailed ordering information, please consult price list or contact Parflex Division.

Black Eagle- 3" Oilfield Service Hose



Features

- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Compact design - smaller O.D. than flexible pipe
- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- DNV Type Approval P 14038 acc. to API 7K and API 17J
- For oilfield services such as: cementing, water and gas injection hose, acidizing, mud circulation



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|-------|--------------------------|-------|---------------------|------|--------|-------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2240N-48V80 | Black | 78 | 3 | 76.0 | 4.49 | 114.0 | 5,000 | 34.5 | 39.93 | 1000 | 7.73 | 11.50 | TX |
| 2440N-48V80 | Black | 78 | 3 | 76.0 | 4.80 | 122.0 | 10,000 | 69.0 | 43.31 | 1100 | 12.57 | 18.70 | LX |
| 2640N-48V80 | Black | 78 | 3 | 76.0 | 4.49 | 130.5 | 15,000 | 103.5 | 47.30 | 1200 | 18.48 | 27.50 | 5X |

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement:

2240N - 2 spiral layers of high tensile steel wire

2440N - 4 spiral layers high tensile steel wire

2640N - 6 spiral layers of high tensile steel wire

Cover: Extra thick dual layer polyurethane

Options

Colors: ● Black w/ ColorGard™ red inner sheath

Temperature Range

-40°F to +158°F (-40°C to +70°C), 2240N and 2440N can be used intermittently at +212°F (+100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Black Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2240N-48V80 | 2440N-48V80 | 2640N-48V80 |
|--|--|--|--|
| Fitting Part Numbers  | 1HETX-48-48 1HETX-48-48-FLAT 1HNTX-48-48 | 1HELX-48-48 1HELX-48-48-FLAT 1HNLX-48-48 | 1HE5X-48-48 1HE5X-48-48-FLAT 1HN5X-48-48 |

Accessories

Technical details available in Section E.

For detailed ordering information, please consult price list or contact Parflex Division.

Black Eagle Light- Cementing Hose

Features

- Abrasive applications, such as cementing
- Significantly higher abrasion resistance than common elastomer materials — longer service life and less contamination in cement slurry
- Easy visualization of core tube erosion— more efficient product inspection and reduced unscheduled downtime
- Lighter weight and smaller O.D. than common 4-layer constructions — faster and easier deployment



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | ○ | | | ◎ | | ↗ | | ↘ | | lbs | kg | 🔌 |
| 2240N-32V10 | Black | 50 | 2 | 50.8 | 2.70 | 68.5 | 3,000 | 20.7 | 19.69 | 500 | 2.96 | 4.40 | S6* |
| 2248N-32V10 | Black | 50 | 2 | 50.8 | 2.70 | 68.5 | 5,000 | 34.5 | 19.69 | 500 | 2.96 | 4.40 | S6* |

Construction

Core Tube: Polyamide 11, two-layer core tube

Reinforcement: Two closed spiral layers of high tensile steel wire

Cover: Polyurethane

Options

Colors: ● Black

Temperature Range

-40°F to +212°F (-40°C to +100°C)

Notes


Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

*Fittings are not for use subsea. For subsea applications, see traditional Black Eagle product series.

Black Eagle Light - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2240N-32V10 | 2448N-32V10 |
|--|--|--|
| Fitting Part Numbers  | Offshore*: 1HES6-32-32-FLAT-SC 1HNS6-32-32-SC Onshore: 1HES6-32-32-FLAT 1HNS6-32-32 | Offshore*: 1HES6-32-32-FLAT-SC 1HNS6-32-32-SC Onshore: 1HES6-32-32-FLAT 1HNS6-32-32 |


*Fittings are not for use subsea. For subsea applications, see traditional Black Eagle product series.

Accessories

Technical details available in Section E.

For detailed ordering information, please consult price list or contact Parflex Division.

Golden Eagle- Chemical Injection and Acidizing Hose

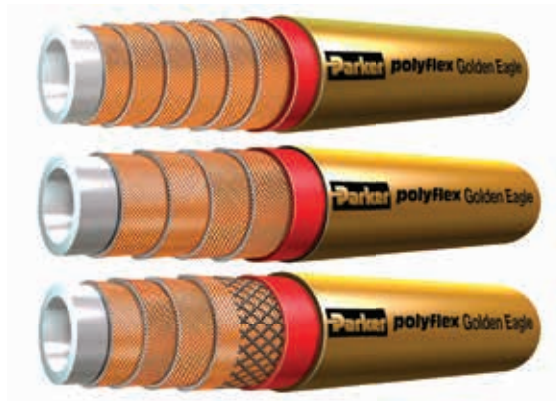

Features and Applications

- ColorGard™, an extra thick dual color Polyurethane sheath
- Long continuous lengths up to 1,000m without splicing (depending on hose type)
- Inner core has superior chemical resistance
- Compact design - smaller OD than flexible pipe
- Up to 30% weight reduction in comparison to R13 rubber hoses - more than 70% in comparison to flexible pipe
- Lower bend radius when compared to composite hose
- Water and chemical injection hose
- Acidizing
- Not recommended for gas applications



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|-------|------|--------------|------|--------------------------|------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| # | | | | | | | | | | | | | |
| 2640M-24V88 | Gold | 40 | 1-1/2 | 38.1 | 2.78 | 70.5 | 10,000 | 69.0 | 19.69 | 500 | 4.84 | 7.20 | 5X |
| 2448M-32V88 | Gold | 50 | 2 | 50.8 | 3.17 | 80.5 | 5,000 | 34.5 | 19.69 | 500 | 5.71 | 8.50 | 5X |
| 2580M-32V88 | Gold | 50 | 2 | 50.8 | 3.33 | 84.5 | 10,000 | 69.0 | 31.50 | 800 | 6.32 | 9.40 | 5X |

Construction

Core Tube: Polyamide 11, methanol washed

Reinforcement:

2640M - 6 spiral layers of high tensile steel wire

2448M- 4 spiral layers high tensile steel wire

2580M - 4 spiral layers and two open spiral layers of high tensile steel wire

Cover: Extra thick dual layer polyurethane

Options

Colors: ● Gold w/ ColorGard™ red inner sheath

Temperature Range

-40°F to +158°F (-40°C to +70°C);

2640M short term up to +212°F (+100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

Golden Eagle - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2640M-24V88 | 2448M-32V88 | 2580M-32V88 |
|--|--|---|--|
| Fitting Part Numbers  | 1HE5X-32-24C4462-FLATTC 1HN5X-32-24C4462-TC | 6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC | *6015X-32-32-TC 6HE5X-32-32-FLATTC 6HN5X-32-32-TC 6HE5X-32-32-SEGTC |

*Working pressures of these hose assemblies is 5,000 psi

Accessories

Technical details available in Section E.

| Hose Part # | Accessory Part Numbers | |
|-------------|------------------------|-------------|
| | Containment Grip | Heat Shrink |
| 2448M-32V88 | MCGHS3295-SS | HDT4500-48A |

ChemJec- Long-length Umbilical Hose



Features

- Excellent chemical resistance
- Medium pressure, high temperature, low volumetric expansion hose
- Withstands high pressure cycles with no signs of stress cracking
- Meets or exceeds the performance requirements of ISO 13628-5
- Long-length subsea umbilical hose



Markets

- Oil & Gas

| Part Number | Jacket Color | Nominal I.D. | | | Maximum O.D. | | Maximum Working Pressure | | Minimum Bend Radius | | Weight | | Fitting Series |
|-------------|--------------|--------------|------|------|--------------|------|--------------------------|-------|---------------------|-----|--------|------|----------------|
| | | DN | inch | mm | inch | mm | psi | MPa | inch | mm | lbs/ft | kg/m | |
| 2440M-04V38 | Gold | 6 | 1/4 | 6.4 | 0.52 | 13.1 | 12,500 | 87.5 | 5.90 | 150 | 0.21 | 0.31 | 8X |
| 2440M-05V38 | Gold | 8 | 5/16 | 7.9 | 0.64 | 16.2 | 10,000 | 69.0 | 6.88 | 175 | 0.33 | 0.49 | LX |
| 2440M-06V38 | Gold | 10 | 3/8 | 9.5 | 0.77 | 19.5 | 10,000 | 69.0 | 7.48 | 190 | 0.49 | 0.73 | LX |
| 2440M-08V38 | Gold | 12 | 1/2 | 12.7 | 0.89 | 22.7 | 10,000 | 69.0 | 7.87 | 200 | 0.63 | 0.94 | LX |
| 2448M-04V38 | Gold | 6 | 1/4 | 6.4 | 0.54 | 13.7 | 15,000 | 103.4 | 9.06 | 230 | 0.26 | 0.38 | UX |
| 2448M-05V38 | Gold | 8 | 5/16 | 7.9 | 0.64 | 16.3 | 15,000 | 103.4 | 9.06 | 230 | 0.35 | 0.52 | LX |
| 2448M-06V38 | Gold | 10 | 3/8 | 9.5 | 0.79 | 20.1 | 15,000 | 103.4 | 7.87 | 200 | 0.56 | 0.83 | UX |
| 2640M-08V38 | Gold | 12 | 1/2 | 12.7 | 0.97 | 24.7 | 15,000 | 103.4 | 11.42 | 290 | 0.90 | 1.34 | 5X |

Construction

Core Tube: Proprietary Specification, based on fluoropolymer technology

Reinforcement:

2440M / 2448M - 4 closed spiral layers of high tensile steel wire

2640M - 6 closed spiral layers of high tensile steel wire

Cover: Polyamide 12

Options

Colors: ● Gold

Temperature Range

-40°F to +212°F (-40°C to +100°C)


Notes

Assembly working pressure is dependent on the lowest rated component. Therefore, if fittings have a lower pressure rating than the hose, the working pressure of the fittings is the working pressure of the assembly.

ChemJec - Fittings and Accessories

Fittings

Technical details available in Section B.

| Hose Part # | 2440M-04V38 | 2440M-05V38 | 2440M-06V38 | 2440M-08V38 |
|---|--|---|---|--|
| Fitting Part Numbers  | 1018X-4-04C 1018X-6-04C 1028X-4-04C 1068X-4-04C 1068X-6-04C 1AY8X-6-04C | 6AYLX-8-5C-M-SUBSEA 106LX-6-05C 1AYLX-8-05C | 6AYLX-8-6C-SUBSEA 106LX-6-06C-M-SUBSEA 106LX-8-06C-M-SUBSEA | 106LX-8-08C-M-SUBSEA 1Y2LX-12-08C-M-SUBSEA |
| | 2448M-04V38 | 2448M-05V38 | 2448M-06V38 | 2640M-08V38 |
| | 101UX-6-04C 1AYUX-6-04C 1Y2UX-6-04C | 6AYLX-8-5C-M-SUBSEA | 1AYUX-8-06C 106UX-8-06C 1Y2UX-9-06C | 1AY5X-11-08C-M-SUBSEA 1Y25X-12-08C-M-SUBSEA 1Y25X-9-08C-M-SUBSEA |

Accessories

Technical details available in Section E.

For detailed ordering information, please consult price list or contact Parflex Division.

Fittings

Permanent / Crimp Fittings

Field Attachable / Reusable

Polyflex-Lok



Table of Contents

Hose
A

Introduction

| | |
|--|-----|
| End Fitting Nomenclature..... | B-2 |
| Fitting Configuration Chart..... | B-3 |
| How to Read the Fittings Section | B-6 |

Fittings by Series

| | |
|---------------------------|------|
| 55 Series..... | B-7 |
| 2X Series | B-9 |
| 3X Series | B-11 |
| 5X Series | B-12 |
| 8X Series | B-14 |
| 9X Series | B-19 |
| AX Series..... | B-21 |
| BL Series..... | B-24 |
| BS Series..... | B-26 |
| CR Series..... | B-28 |
| E2 Series..... | B-29 |
| E3 Series..... | B-30 |
| EX Series..... | B-33 |
| HP Series..... | B-34 |
| HX Series..... | B-35 |
| KY Series..... | B-36 |
| LX Series..... | B-38 |
| NX Series..... | B-48 |
| PL Series..... | B-51 |
| RX Series..... | B-52 |
| TX Series..... | B-54 |
| UX Series..... | B-56 |
| WX Series..... | B-57 |
| Black Eagle Fittings..... | B-58 |

Polyflex-Lok

| | |
|------------------------------|------|
| Polyflex-Lok Components..... | B-63 |
|------------------------------|------|

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Fitting Part Number Nomenclature



6Y4LX-9-3C

6

Y4

1. Design Type

- 1 = German-designed end fitting
- 6 = US-designed end fitting
- 2 = Reusable style end fittings

2. Connection Type

- | | |
|--------------------------------------|---|
| 01 = NPT - Male | D9 = BSP Rigid - Male |
| 02 = NPT - Female | G2 = BSP Swivel 90° Elbow - Female |
| 06 = JIC 37° Flare - Female | 92 / BC = BSP Swivel - Female |
| 5Y = Medium Pressure Swivel - Female | 07 = NPS Swivel - Female |
| Y2 = Medium Pressure - Male | EZ = Waterblast Nozzle - Female |
| 6Y = High Pressure Swivel - Female | ZE = Waterblast Nozzle - Male |
| Y4 = High Pressure - Male | HY = Waterblast Nozzle - Female |
| RX = Reusable | YH = Waterblast Nozzle - Male |
| AY = Type "M" Swivel - Female | 3Z = Waterblast Nozzle - Male |
| YA = Type "M" Swivel - Male | HE = 2" Hammer Union, Cone w/ Wing Nut - Male |
| MB = STECKO | HN = 2" Hammer Union, Cone Threaded End w/ Seal- Female |
| C3 / C9 = METRIC Swivel - Female | TU = Tube Stub Fitting |

LX

9

3

C

3. Hose Series Designation

- 2X = 2840D, 2740D and 2640D Series Hoses
- 3X = 2022N Series Hoses
- 5X = All 2640 Series Hoses
- 8X = All 2244 and 2380 Series Hoses
- 9X = All 2300 Series Hoses
- AX = 2240D-025V34
- BL = 2580N Series Hoses
- BS = 2388N Series Hoses
- CR = 57CR Series Hoses
- E2 = 2390N Series Hoses
- E3 = 2390N Series Hoses
- EX = 2020N Series Hoses
- HP = HP/HP8 Series Hoses
- HX = All 2740 Series Hoses
- KY = 2380N Series Hoses
- LX = All 2440 Series Hoses
- NX = 2240D-04, 2300 Series Hoses
- PL = 2240D Series Hoses
- RX = 2020N-02V30 (Reusable Fittings)
- TX = 2240D/2248D Series Hoses
- UX = 2448M Series Hoses
- WX = All 2840 Series Hoses

4. Connection Size

- | | |
|-----------------------|----------------------------|
| JIC / Type M | NPT |
| 1 = 1/4" - 28 UNF | 1 = 1/16 - 27 |
| 2 = 5/16" - 24 UNF | 2 = 1/8 - 27 |
| 3 = 3/8" - 24 UNF | 4 = 1/4 - 18 |
| 4 = 7/16" - 20 UNF | 6 = 3/8 - 18 |
| 5 = 1/2" - 20 UNF | 8 = 1/2 - 14 |
| 6 = 9/16" - 18 UNF | 12 = 3/4 - 14 |
| 7 = 5/8" - 18 UNF | 16 = 1-11 1/2 |
| 8 = 3/4" - 16 UNF | 20 = 1 1/4-11 1/2 |
| 10 = 7/8" - 14 UNF | 24 = 1 1/-11 1/2 |
| 11 = 1" - 12 UNF | 32 = 2-11 1/2 |
| 12 = 1-1/16" - 12 UNF | |
| 13 = 1-1/8" - 12 UNF | MP & HP Tube |
| 15 = 1-1/4" - 12 UNF | Sized by nominal tube O.D. |
| 16 = 1-5/16" - 12 UNF | 4 = 1/4" - 28 LH |
| 17 = 1-3/8" - 12 UNF | 6 = 3/8" - 24 LH |
| 19 = 1-1/2" - 12 UNF | 9 = 9/16" - 18 LH |
| 20 = 1-5/8" - 12 UNF | 12 = 3/4" - 16 LH |
| | 16 = 1" - 14 LH |
| BSP | |
| 2 = G 1/8" | |
| 4 = G 1/4" | |
| 6 = G 3/8" | |
| 8 = G 1/2" | |

6. Hose Size

- 2 = 1/8" hose
- 2A = 5/32" hose
- 3 = 3/16" hose
- 4 = 1/4" hose
- 5 = 5/16" hose
- 6 = 3/8" hose
- 8 = 1/2" hose
- 10 = 5/8" hose
- 12 = 3/4" hose
- 16 = 1" hose
- 24 = 1-1/2" hose
- 32 = 2" hose

1. Fitting Material









- C = Stainless steel
 - Blank = Carbon steel
- Any other materials will be noted in the Fitting section



Fitting Designation Descriptions

Hose
A

B
Fittings
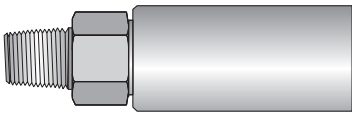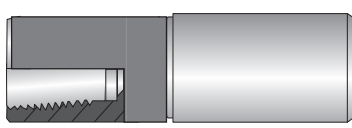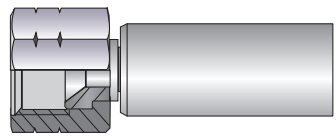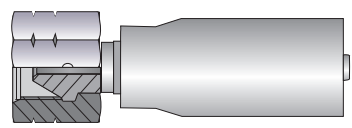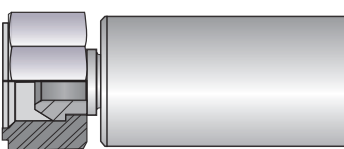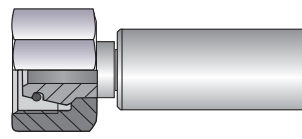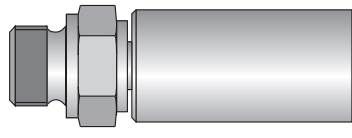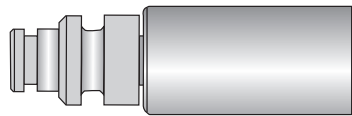
| Fitting | Fitting Description | Fitting Designation |
|---|--------------------------------------|---------------------|
|  | National Pipe Tapered (NPT) - Male | 01 |
|  | National Pipe Tapered (NPT) - Female | 02 |
|  | JIC 37° Flare - Female | 06 |
|  | Type "M" Swivel - Female | AY |
|  | BSP Swivel - Female | 92 |
|  | Metric Swivel - Female | C3 or C9 |
|  | BSP Rigid - Male | D9 |
|  | Stecko - Male | MB |









C
Adapters &
Valves

D
Quick Couplings

E
Accessories

F
General Technical

Fitting Designation Descriptions

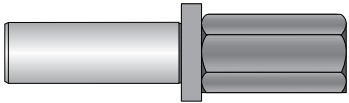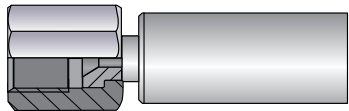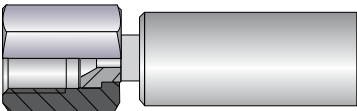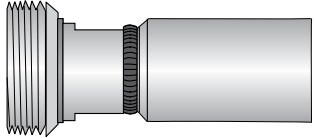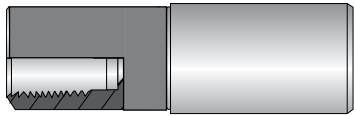
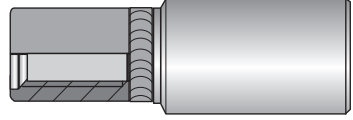

| Fitting | Fitting Description | Fitting Designation |
|---|---|---------------------|
|  | Tube Stub Fitting | TU |
|  | Medium Pressure Swivel - Female | 5Y |
|  | High Pressure Female Swivel | 6Y |
|  | Hammer Union (Male) Cone with Wing Nut | HE |
|  | Hammer Union (Female) Cone Threaded End with Seal | HN |
|  | Medium Pressure Tube Nipple | Y2 |
|  | High Pressure Tube Nipple | Y4 |
|  | Waterblast Nozzle - Female | EZ |

For detailed ordering information, please consult price list or contact Parflex Division.

Fitting Designation Descriptions

Hose
A

Fittings
B

| Fitting | Fitting Description | Fitting Designation |
|---|----------------------------|---------------------|
|  | Waterblast Nozzle - Male | ZE |
|  | Waterblast Nozzle - Female | HY |
|  | Waterblast Nozzle - Male | YH |




Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

How to Read the Fittings Section

| 1 Part Number | 2 Thread Size | 3 A Overall Length | | 4 B Cutoff Allowance | | 5 Hex H and/or J | | 6 Max. Working Pressure | |
|------------------|---|--------------------------|----|----------------------------|----|--|----|---|-------|
| # |  | | | | |  | |  | |
| | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6AYHX-6-3C | 9/16" - 18 | 3.20 | 81 | 1.40 | 36 | 0.68 | 17 | 40,600 | 280.0 |

1 Part Number

The fitting part number gives the connection type and size of the fitting, as well as, the hose series and hose size the fitting is intended for (see part number breakdown on pg. B-2).

2 Thread Size

UNF threads will contain a number indicating the nominal diameter of the thread, followed by the pitch measured in threads per inch. Any other thread form will be identified in the thread size measurement (i.e. NPT, BSP, Metric, etc.).

3 Overall Fitting Length

This measurement indicates the total length of fitting from end to end.

4 Cutoff Allowance

End fitting dimension from the seating surface to the fitting hose stop. This dimension added to the length of the cut hose will yield the over-all length(OAL) of the hose assembly.

5 Hex Size




This is the dimension of the hex across opposing flats.

6 Maximum Working Pressure

Maximum pressure at which the fitting should be operated. Most fittings are rated for the full working pressure of the hose. Fittings with maximum pressures that differ from the hose working pressure will be called out.


Note: The working pressure of a hose assembly is dependent upon the lowest rated component of that assembly. For example, if a hose is rated to 40K psi, but the fittings are rated to 15K psi, the working pressure of that assembly is 15K psi.

55 Series Fittings

| | | | | | | |
|--------------------------------|---|------------------------|---|-------------------|--|------------------------|
| 55 Series Crimp Fittings | 06 | JIC 37° Flare - Female | 92 | BSP Female Swivel | C9 | Metric Swivel - Female |
| |  | |  | |  | |
| | B-7 | | B-7 | | B-8 | |

10655- JIC 37° Female Flare


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | # | ⊙ | ⌀ | | | | | | | ⬡ | ↻ | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 10655-4-4C | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.56 | 65 | 1.30 | 33 | 0.670 | 17 | 10,000 | 69 |
| 10655-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.64 | 67 | 1.38 | 35 | 0.670 | 17 | 10,000 | 69 |
| 10655-6-6C | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 | 2.72 | 69 | 1.30 | 33 | 0.750 | 19 | 10,000 | 69 |
| 10655-6-8C | 12 | -08 | 1/2 | 12.7 | 9/16" - 18 | 2.99 | 76 | 1.38 | 35 | 0.870 | 22 | 10,000 | 69 |
| 10655-8-8C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 3.11 | 79 | 1.54 | 38 | 0.870 | 22 | 10,000 | 69 |

19255- BSP Swivel - Female

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | # | ⊙ | ⌀ | | | | | | | ⬡ | ↻ | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 19255-4-4C | 6 | -04 | 1/4 | 6.4 | G 1/4" - 19 | 2.28 | 58 | 1.02 | 26 | 0.670 | 17 | -- | -- |
| 19255-6-6C | 10 | -06 | 3/8 | 9.5 | G 3/8" - 19 | 2.52 | 64 | 1.06 | 27 | 0.750 | 19 | -- | -- |
| 19255-8-8C | 12 | -08 | 1/2 | 12.7 | G 1/2" - 14 | 2.87 | 73 | 1.26 | 32 | 0.940 | 24 | -- | -- |

*Fitting is rated to the full working pressure of the hose

55 Series Fittings

1C955- Metric Swivel - Female





Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | # | ⊙ | ⋈ | | | | | | | | | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1C955-8-4C | 6 | -04 | 1/4 | 6.4 | M 16 x 1.5 | 2.76 | 70 | 1.50 | 38 | 0.670 | 17 | -- | -- |
| 1C955-10-4C | 6 | -04 | 1/4 | 6.4 | M 18 x 1.5 | 2.64 | 67 | 1.42 | 36 | 0.750 | 19 | -- | -- |
| 1C955-12-4C | 6 | -04 | 1/4 | 6.4 | M 20 x 1.5 | 2.52 | 64 | 1.26 | 32 | 0.750 | 19 | -- | -- |
| 1C955-12-6C | 10 | -06 | 3/8 | 9.5 | M 20 x 1.5 | 2.68 | 68 | 1.26 | 32 | 0.750 | 19 | -- | -- |
| 1C955-16-8C | 12 | -08 | 1/2 | 12.7 | M 24 x 1.5 | 3.03 | 77 | 1.42 | 36 | 0.940 | 24 | -- | -- |


*Fitting is rated to the full working pressure of the hose





2X Series Fittings

| | | | | | | | | |
|--------------------------|---|-----------------------------|---|------------------------|--|---------------------------|---|-------------------|
| 2X Series Crimp Fittings | 6Y | High Pressure Female Swivel | AY | Type "M" Female Swivel | Y4 | High Pressure Tube Nipple | 92 | BSP Female Swivel |
| |  | |  | |  | |  | |
| | B-9 | | B-9 | | B-10 | | B-10 | |

16Y2X- High Pressure Female Swivel

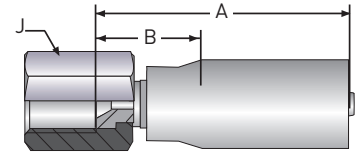Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel








| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|---|------|-----|-------------|---|----|--------------------|----|-------|---|---------------------------|---|
| | # |  | | | |  | | | | |  | |  |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 16Y2X-4-025 | 4 | -025 | 5/32 | 4.0 | 9/16" - 18 | 2.99 | 76 | 0.90 | 23 | 0.875 | 22 | -- | -- |
| 16Y2X-4-03 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 2.99 | 76 | 0.90 | 23 | 0.875 | 22 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1AY2X- Type "M" Female Swivel

Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|----------------|--------------|---|------|-----|-------------|---|----|--------------------|----|-------|---|---------------------------|---|
| | # |  | | | |  | | | | |  | |  |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1AY2X-6-025-SA | 4 | -025 | 5/32 | 4.0 | 9/16" - 18 | 2.40 | 61 | 0.94 | 24 | 0.875 | 22 | -- | -- |
| 1AY2X-6-03-SA | 5 | -03 | 3/16 | 4.8 | 9/16"-18 | 3.58 | 91 | 1.50 | 38 | 0.875 | 22 | -- | -- |
| 1AY2X-6-03 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 3.58 | 91 | 1.50 | 38 | 0.875 | 22 | -- | -- |
| 1AY2X-8-05-SA | 8 | -05 | 5/16 | 7.9 | 3/4"-16 | 3.58 | 91 | 1.50 | 38 | 1.000 | 25 | -- | -- |
| 1AY2X-10-05-SA | 8 | -05 | 5/16 | 7.9 | 7/8"-14 | 3.58 | 91 | 1.50 | 38 | 1.250 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose

2X Series Fittings

1Y42X- High Pressure Tube Nipple

Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|---------------|------------------|-----|--------------------|----|------------|------|---------------------------|-----|
| | # | ⊙ | ⋈ | | | | | | | ∅ | ↗ | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1Y42X-4-025 | 4 | -025 | 5/32 | 4.0 | 1/4" - 28 LH | 3.50 | 88 | 1.97 | 50 | 0.615 | 16 | -- | -- |
| 1Y42X-6-025 | 4 | -025 | 5/32 | 4.0 | 3/8" - 24 LH | 3.90 | 98 | 2.17 | 55 | 0.615 | 16 | -- | -- |
| 1Y42X-4-03 | 5 | -03 | 3/16 | 4.8 | 1/4" - 28 LH | 4.60 | 116 | 2.48 | 63 | 0.732 | 18.6 | -- | -- |
| 1Y42X-6-03 | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 LH | 4.60 | 116 | 2.28 | 58 | 0.750 | 19 | -- | -- |
| 1Y42X-9-03 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 LH | 4.60 | 116 | 2.48 | 63 | 0.750 | 19 | -- | -- |
| 1Y42X-6-05 | 8 | -05 | 5/16 | 7.9 | 3/8" - 24 LH | 4.60 | 116 | 2.48 | 63 | 0.905 | 23 | -- | -- |
| 1Y42X-9-05 | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 LH | 4.90 | 125 | 2.48 | 63 | 0.905 | 23 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1922X- BSP Female Swivel


Material: Nipple - Very high strength stainless steel
Shell - Zinc-plated high strength carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|---------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | # | ⊙ | ⋈ | | | | | | | ⬡ | ↗ | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1922X-4-03-SA | 5 | -03 | 3/16 | 4.8 | G 1/4" - 19 | 3.11 | 79 | 1.02 | 26 | 0.875 | 22 | -- | -- |


*Fitting is rated to the full working pressure of the hose

3X Series Fittings

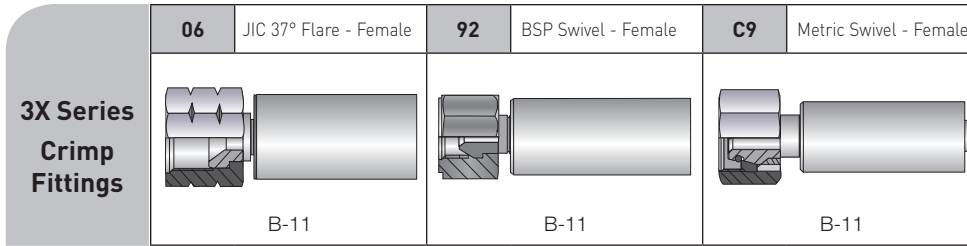

1063X- JIC 37° Female Flare


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 1063X-6-06C | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 | 2.72 | 69 | 1.30 | 33 | 0.870 | 22 | 10,000 | 69 |
| 1063X-8-06C | 10 | -06 | 3/8 | 9.5 | 3/4" - 16 | 2.85 | 73 | 1.28 | 33 | 1.000 | 24 | 10,000 | 69 |

1923X- BSP Female Swivel

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 1923X-8-06C | 10 | -06 | 3/8 | 9.5 | G 1/2" - 14 | 2.60 | 66 | 0.87 | 22 | 1.180 | 30 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1C93X- Metric Swivel - Female




Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|--------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 1C93X-14-06C | 10 | -06 | 3/8 | 9.5 | M 22 x 1.5 | 2.95 | 75 | 1.20 | 30 | 1.180 | 30 | -- | -- |
| 1C93X-16-06C | 10 | -06 | 3/8 | 9.5 | M 24 x 1.5 | 3.50 | 88 | 1.35 | 34 | 1.180 | 30 | -- | -- |


*Fitting is rated to the full working pressure of the hose

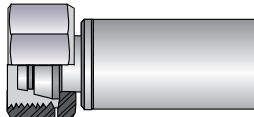


5X Series Fittings

| | | | |
|--------------------------------|---|---|--|
| 5X Series Crimp Fittings | AY Type "M" Female Swivel | C9 Metric Female Swivel | Y2 Medium Pressure Tube Nipple |
| |  B-12 |  B-13 |  B-13 |

6AY5X- Type "M" Female Swivel

Material: Nipple - Very high strength stainless steel
SD / SUBSEA - High strength corrosion-resistant stainless steel
Shell and Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-----------------------|--------------|------|------|------|--------------|---|-----|--------------------|----|-------|---|---------------------------|---|
| | # | ⊙ | | | |  | | | | |  | |  |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6AY5X-11-8C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 4.25 | 108 | 1.72 | 44 | 1.250 | 32 | -- | -- |
| 6AY5X-16-12C | 20 | -12 | 3/4 | 19 | 1-5/16" - 12 | 4.26 | 108 | 1.52 | 39 | 1.500 | 38 | -- | -- |
| 6AY5X-16-12C-SD | 20 | -12 | 3/4 | 19 | 1-5/16" - 12 | 4.26 | 108 | 1.52 | 39 | 1.500 | 38 | -- | -- |
| 6AY5X-11-8C-SUBSEA | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 4.22 | 107 | 1.98 | 50 | 1.250 | 32 | -- | -- |
| 1AY5X-11-08C-M-SUBSEA | 12 | -08 | 1/2 | 12.7 | 1"-12 | 4.42 | 112 | 1.87 | 47 | 1.250 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-12

5X Series Fittings

6C95X- Metric Female Swivel

Material: Nipple - Very high strength stainless steel
 Shell - Stainless steel
 Nut - Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure* | |
|--------------|--------------|------|------|------|-------------|------------------|-----|--------------------|----|-------|----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⬡ | | ⌚ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6C95X-16-8C | 12 | -08 | 1/2 | 12.7 | M 24 x 1.5 | 3.58 | 91 | 1.45 | 37 | 1.260 | 32 | -- | -- |
| 6C95X-25-12C | 20 | -12 | 3/4 | 19.0 | M 36 x 2 | 4.37 | 111 | 1.60 | 41 | 1.810 | 46 | -- | -- |

*Fitting is rated to the full working pressure of the hose

















6Y25X- Medium Pressure Tube Nipple

Material: Nipple - Very high strength stainless steel
 SUBSEA - High strength corrosion resistant stainless steel
 Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|-----------------------|--------------|------|------|------|---------------|------------------|-----|--------------------|-----|------------|----|--------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ∅ | | ⌚ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6Y25X-9-8C | 12 | -08 | 1/2 | 12.7 | 9/16" - 18 LH | 4.30 | 109 | 2.19 | 56 | 1.250 | 32 | 20,000 | 138 |
| 6Y25X-12-8C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 LH | 4.20 | 107 | 2.10 | 53 | 1.250 | 32 | 20,000 | 138 |
| 6Y25X-16-12C | 20 | -12 | 3/4 | 19.0 | 1" - 14 LH | 7.82 | 199 | 4.72 | 120 | 1.500 | 38 | 20,000 | 138 |
| 1Y25X-9-08C-M-SUBSEA | 12 | -08 | 1/2 | 12.7 | 9/16" - 18 LH | 6.69 | 174 | 4.31 | 109 | 1.339 | 34 | 20,000 | 138 |
| 1Y25X-12-08C-M-SUBSEA | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 LH | 7.25 | 184 | 4.70 | 119 | 1.339 | 34 | 20,000 | 138 |

8X Series Fittings

| | | | | | | |
|--|--|--|--|--|--|--|
| 8X Series Crimp Fittings | 01 NPT Male | 02 NPT - Female | 06 JIC 37° Flare - Female | 37 45° JIC Subsea | 39 90° JIC Subsea | 5Y Medium Pressure Swivel - Female |
| |  B-14 |  B-14 |  B-14; B-15 |  B-15 |  B-15 |  B-16 |
| | 92 BSP Female Swivel | 9G Straight Dual Seal Subsea | 9M 45° Dual Seal Subsea | 9W 90° Dual Seal Subsea | AY Type M Swivel - Female | C3 Metric Swivel - Female |
|  B-16 |  B-15 |  B-16 |  B-16 |  B-17 |  B-17 | |
| C9 Metric Swivel - Female | D9 BSP Rigid - Male | MB Stecko | Y2 Medium Pressure - Male | | | |
|  B-17 |  B-18 |  B-18 |  B-18 | | | |

6018X- NPT Male 1018X- NPT Male




Material:
Nipple - Very high strength stainless steel
A - Carbon steel AC - Stainless steel
Shell - Very high strength stainless steel
A - Carbon steel AC - Stainless steel

1018X Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel

| Part Number | Nominal I.D. | | Thread Size | | A Overall Length | | B Cutoff Allowance | | H Hex | | Max. Working Pressure | |
|-------------|--------------|------|-------------|------|------------------|------|--------------------|------|-------|-------|-----------------------|------------|
| | DN | Size | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | ⋈ | | | | | | ⬡ | | ⌚ | |
| 6018X-2-2A | 4 | -025 | 5/32 | 4.0 | 1/8" - 27 | 1.86 | 47 | 0.76 | 19 | 0.630 | 16 | 15,000 103 |
| 6018X-2-2AC | 4 | -025 | 5/32 | 4.0 | 1/8" - 27 | 2.18 | 55 | 1.80 | 46 | 0.500 | 13 | 15,000 103 |
| 6018X-4-2AC | 4 | -025 | 5/32 | 4.0 | 1/4" - 18 | 2.44 | 62 | 1.35 | 34 | 0.620 | 16 | 15,000 103 |
| 6018X-6-4 | 6 | -04 | 1/4 | 6.4 | 3/8" - 18 | 2.80 | 71 | 1.50 | 38 | 0.750 | 19 | 15,000 103 |
| 6018X-8-8C | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.46 | 88 | 1.67 | 42 | 1.000 | 25 | 15,000 103 |

| Part Number | Nominal I.D. | | Thread Size | | A Overall Length | | B Cutoff Allowance | | H Hex | | Max. Working Pressure | |
|-------------|--------------|------|-------------|-----|------------------|------|--------------------|------|-------|-------|-----------------------|------------|
| | DN | Size | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | ⋈ | | | | | | ⬡ | | ⌚ | |
| 1018X-4-04 | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.54 | 65 | 1.30 | 33 | 0.560 | 14 | 15,000 103 |
| 1018X-4-04C | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.54 | 65 | 1.30 | 33 | 0.560 | 14 | 15,000 103 |
| 1018X-6-04 | 6 | -04 | 1/4 | 6.4 | 3/8" - 18 | 2.64 | 67 | 1.38 | 35 | 0.750 | 19 | 15,000 103 |
| 1018X-6-04C | 6 | -04 | 1/4 | 6.4 | 3/8" - 18 | 2.64 | 67 | 1.38 | 35 | 0.750 | 19 | 15,000 103 |

1028X- NPT Female




Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
C - Stainless steel

| Part Number | Nominal I.D. | | Thread Size | | A Overall Length | | B Cutoff Allowance | | H Hex | | Max. Working Pressure | |
|-------------|--------------|------|-------------|-----|------------------|------|--------------------|------|-------|-------|-----------------------|------------|
| | DN | Size | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | ⋈ | | | | | | ⬡ | | ⌚ | |
| 1028X-4-04 | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.72 | 69 | 1.18 | 30 | 0.750 | 19 | 15,000 103 |
| 1028X-4-04C | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.72 | 69 | 1.18 | 30 | 0.750 | 19 | 15,000 103 |

For detailed ordering information, please consult price list or contact Parflex Division.

8X Series Fittings

6068X- JIC 37° Female Flare 1068X- JIC 37° Female Flare




Material:
Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel

1068X Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
SUBSEA - High strength stainless steel
Shell/Nut - Carbon steel, zinc-plated
C / SUBSEA- Stainless steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|-----------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌀ | | | | | ⬡ | | ⌚ | |
| 6068X-4-2AC | 4 | -025 | 5/32 | 4.0 | 7/16" - 20 | 2.17 | 55 | 1.05 | 27 | 0.560 | 14 | 10,000 | 69 |
| 1068X-4-04C | 12 | -08 | 1/2 | 12.7 | 3/4" - 1 | 3.10 | 79 | 1.30 | 33 | 0.870 | 22 | 10,000 | 69 |

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Max. Working Pressure | |
|---------------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|-----------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌀ | | | | | ⬡ | | ⌚ | |
| 1068X-4-04 | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.24 | 57 | 1.02 | 26 | 0.750 | 19 | 10,000 | 69 |
| 1068X-4-04C | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.24 | 57 | 1.02 | 26 | 0.750 | 19 | 10,000 | 69 |
| 1068X-6-04 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.17 | 55 | 0.94 | 24 | 0.750 | 19 | 10,000 | 69 |
| 1068X-6-04C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.17 | 55 | 0.94 | 24 | 0.750 | 19 | 10,000 | 69 |
| 1068X-16-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 1 5/16"-12 | 3.80 | 97 | 1.70 | 44 | 1.610 | 41 | 10,000 | 69 |


1378X- JIC 45°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | E | | J Hex | | Max. Working Pressure | |
|---------------------|--------------|------|------|------|-------------|------------------|-----|--------------------|------|------|------|-------|----|-----------------------|------|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌀ | | | | | | | ⬡ | | ⌚ | |
| 1378X-16-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 1-5/16"-12 | 5.00 | 127 | 2.91 | 74.0 | 1.23 | 31.3 | 1.61 | 41 | 5,000 | 34.5 |


1398X- JIC 90°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | E | | J Hex | | Max. Working Pressure | |
|---------------------|--------------|------|------|------|-------------|------------------|-----|--------------------|------|------|------|-------|----|-----------------------|------|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌀ | | | | | | | ⬡ | | ⌚ | |
| 1398X-16-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 1-5/16"-12 | 4.65 | 118 | 2.56 | 65.0 | 2.62 | 65.0 | 1.61 | 41 | 5,000 | 34.5 |

19G8X- Straight Dual Seal




Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Max. Working Pressure | |
|---------------------|--------------|------|------|------|-------------|------------------|-----|--------------------|------|-----------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌀ | | | | | ⌚ | |
| 19G8X-16-16C-SUBSEA | 25 | -16 | 1 | 25.4 | - | 3.812 | 97 | 1.726 | 43.8 | 5,000 | 69 |
| 19G8X-24-16C-SUBSEA | 25 | -16 | 1 | 25.4 | - | 4.062 | 103 | 1.976 | 50.2 | 5,000 | 69 |

8X Series Fittings


19M8X- Dual Seal 45°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

| Part Number | Nominal I.D. | | | | Flange Diameter | | A Overall Length | | B Cutoff Allowance | | E | | Max. Working Pressure | |
|---------------------|--------------|------|------|------|-----------------|------|------------------|-------|--------------------|------|-------|------|-----------------------|------|
| | # | ⊙ | | | | ∅ | | | | | | ⌚ | | |
| | DN | Size | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| 19M8X-16-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 1.88 | 47.6 | 5.30 | 134.5 | 3.21 | 81.5 | 1.525 | 38.7 | 5,000 | 34.5 |
| 19M8X-24-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 2.5 | 63.5 | 5.47 | 139 | 3.39 | 86.0 | 1.702 | 43.2 | 5,000 | 34.5 |


19W8X- Dual Seal 90°



Material:
Nipple - High Strength Stainless steel
Shell - Stainless steel
Nut - Stainless steel

| Part Number | Nominal I.D. | | | | Flange Diameter | | A Overall Length | | B Cutoff Allowance | | E | | Max. Working Pressure | |
|---------------------|--------------|------|------|------|-----------------|------|------------------|-----|--------------------|------|-------|------|-----------------------|------|
| | # | ⊙ | | | | ∅ | | | | | | ⌚ | | |
| | DN | Size | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| 19W8X-16-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 1.88 | 47.6 | 4.65 | 118 | 2.56 | 65.0 | 1.525 | 38.7 | 5,000 | 34.5 |
| 19W8X-24-16C-SUBSEA | 25 | -16 | 1 | 25.4 | 2.5 | 63.5 | 4.65 | 118 | 2.56 | 65.0 | 3.382 | 85.9 | 5,000 | 34.5 |

1928X- BSP Swivel - Female




Material:
Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated
Nut - Carbon steel, zinc-plated
Suffix "C" - All components Stainless Steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|------------------------|-----|
| | # | ⊙ | | | | | | | | ⬡ | | ⌚ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1928X-4-04 | 6 | -04 | 1/4 | 6.4 | G 1/4" - 19 | 2.20 | 56 | 0.98 | 25 | 0.750 | 19 | -- | -- |
| 1928X-4-04C | 6 | -04 | 1/4 | 6.4 | G 1/4" - 19 | 2.20 | 56 | 0.98 | 25 | 0.750 | 19 | -- | -- |

*Fitting is rated to the full working pressure of the hose

65Y8X- Medium Pressure Swivel - Female




Material:
Nipple - Carbon steel
Shell - Carbon steel, zinc-plated
Nut - Stainless steel
Suffix "C" - All components Stainless Steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|------------------------|-----|
| | # | ⊙ | | | | | | | | ⬡ | | ⌚ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 65Y8X-6-4 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.78 | 71 | 1.55 | 39 | 0.750 | 19 | 20,000 | 138 |
| 15Y8X-6-04C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.24 | 57 | .937 | 24 | 0.750 | 19 | 20,000 | 138 |

For detailed ordering information, please consult price list or contact Parflex Division.

8X Series Fittings

6AY8X- Type "M" Swivel - Female




Material:
Nipple - High strength steel
AC - Stainless steel
C - High strength stainless steel
Shell - Carbon steel, zinc-plated
AC - Stainless steel
C - Stainless steel
Nut - High strength steel
AC - Stainless steel
C - Stainless steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure* | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6AY8X-6-2AC | 3 | -02 | 1/8 | 3.2 | 9/16" - 18 | 2.32 | 59 | 1.24 | 31 | 0.680 | 17 | -- | -- |
| 6AY8X-6-4 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.54 | 65 | 1.30 | 33 | 0.750 | 19 | -- | -- |
| 6AY8X-8-5C | 8 | -05 | 5/16 | 7.9 | 3/4" - 16 | 2.95 | 75 | 1.25 | 32 | 1.000 | 25 | -- | -- |
| 6AY8X-11-8C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.27 | 83 | 1.49 | 38 | 1.250 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1AY8X- Type "M" Swivel - Female




Material:
Nipple - Carbon steel, zinc-plated
C - Stainless steel
Shell - Carbon steel, zinc-plated
Stainless steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure* | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1AY8X-6-04 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.68 | 68 | 1.38 | 35 | 0.670 | 17 | -- | -- |
| 1AY8X-6-04C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.68 | 68 | 1.38 | 35 | 0.670 | 17 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1C38X- Metric Swivel - Female




Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated
Nut - Carbon steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure* | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1C38X-8-04 | 6 | -04 | 1/4 | 6.4 | M 14 x 1.5 | 2.45 | 62 | 1.20 | 30 | 0.750 | 19 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1C98X- Metric Swivel - Female




Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated
Nut - Carbon steel

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Max. Working Pressure* | |
|--------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1C98X-8-04C | 6 | -04 | 1/4 | 6.4 | M 16 x 1.5 | 2.32 | 59 | 1.06 | 27 | 0.750 | 19 | -- | -- |
| 1C98X-10-04C | 6 | -04 | 1/4 | 6.4 | M 18 x 1.5 | 2.20 | 56 | 1.30 | 33 | 0.866 | 22 | -- | -- |

*Fitting is rated to the full working pressure of the hose

8X Series Fittings

1D98X- BSP Rigid - Male




Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Max. Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ⌚ | |
| 1D98X-4-4 | 6 | -04 | 1/4 | 6.4 | 1/4" BSPP | 2.65 | 67 | 1.39 | 35 | 0.750 | 19 | -- | -- |

*Fitting is rated to the full working pressure of the hose


1MB8X- Stecko - Male



Material:
Nipple - High strength steel
Shell - Carbon steel, zinc-plated

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Max. Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|-----------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ⌚ | |
| 1MB8X-6-4 | 6 | -04 | 1/4 | 6.4 | -- | 2.85 | 72 | 1.58 | 40 | 0.860 | 22 | 10,000 | 69 |


1Y28X- Medium Pressure - Male



Material:
Nipple - Stainless steel
Shell - Stainless steel


| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Max. Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|-----|--------------------|----|------------|----|------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ∅ | | ⌚ | |
| 1Y28X-6-04C | 6 | -04 | 1/4 | 6.4 | 3/8"-24 LH | 4.29 | 109 | 2.20 | 56 | 0.860 | 22 | 20,000 | 138 |
| 1Y28X-9-04C | 6 | -04 | 1/4 | 6.4 | 9/16"-18 LH | 4.21 | 107 | 2.09 | 53 | 0.860 | 22 | 20,000 | 138 |

9X Series Fittings

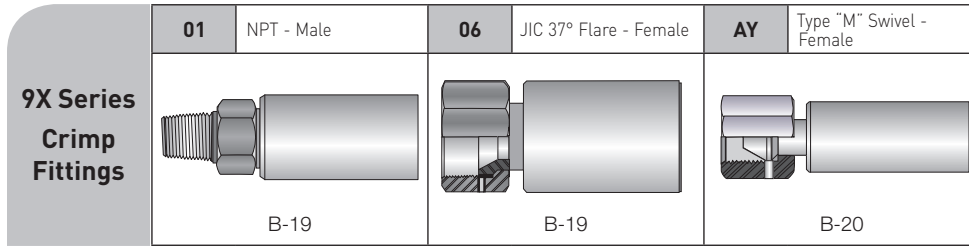

6019X- NPT Male


Material: Nipple - High strength steel
 C - Stainless steel
 Shell - Carbon steel
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|--------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6019X-4-4C | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.38 | 60 | 1.12 | 28 | 0.630 | 16 | 15,000 | 103 |
| 6019X-6-6 | 10 | -06 | 3/8 | 9.5 | 3/8" - 18 | 2.95 | 75 | 1.35 | 34 | 0.750 | 19 | 15,000 | 103 |
| 6019X-6-6C | 10 | -06 | 3/8 | 9.5 | 3/8" - 18 | 2.95 | 75 | 1.35 | 34 | 0.750 | 19 | 15,000 | 103 |
| 6019X-8-6 | 10 | -06 | 3/8 | 9.5 | 1/2" - 14 | 3.16 | 80 | 1.56 | 40 | 0.870 | 22 | 15,000 | 103 |
| 6019X-8-6C | 10 | -06 | 3/8 | 9.5 | 1/2" - 14 | 3.16 | 80 | 1.56 | 40 | 0.870 | 22 | 15,000 | 103 |
| 6019X-8-8 | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.35 | 85 | 1.43 | 36 | 0.870 | 22 | 15,000 | 103 |
| 6019X-8-8C | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.37 | 86 | 1.68 | 43 | 1.000 | 25 | 15,000 | 103 |
| 6019X-16-16C | 25 | -16 | 1 | 25.4 | 1" - 11 1/2 | 4.38 | 111 | 2.25 | 57 | 1.380 | 35 | 10,000 | 69 |

6069X- JIC 37° Female Flare

Material: Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------------|--------------|-----|------|------|--------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6069X-4-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.36 | 60 | 1.10 | 28 | 0.680 | 17 | 10,000 | 69 |
| 6069X-6-4C | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.24 | 57 | 0.98 | 25 | 0.630 | 16 | 10,000 | 69 |
| 6069X-8-6C | 10 | -06 | 3/8 | 9.5 | 3/4" - 16 | 2.79 | 71 | 1.19 | 30 | 1.000 | 25 | 10,000 | 69 |
| 6069X-8-8C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 3.00 | 76 | 1.30 | 33 | 0.870 | 22 | 10,000 | 69 |
| 6069X-16-16C | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 3.79 | 96 | 1.65 | 42 | 1.500 | 38 | 10,000 | 69 |
| 6069X-6-6C-SUBSEA | 10 | -06 | 3/8 | 9.5 | 7/16" - 20 | 3.64 | 92 | 1.74 | 44 | 1.000 | 25 | 10,000 | 69 |

9X Series Fittings

6AY9X- Type "M" Swivel - Female







Material: Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure* | |
|--------------|--------------|------|------|------|--------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| 6AY9X-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.36 | 60 | 1.10 | 28 | 0.680 | 17 | -- | -- |
| 6AY9X-8-6C | 10 | -06 | 3/8 | 9.5 | 3/4" - 16 | 2.79 | 71 | 1.19 | 30 | 1.000 | 25 | -- | -- |
| 6AY9X-11-8C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.20 | 81 | 1.50 | 38 | 1.250 | 32 | -- | -- |
| 6AY9X-16-16C | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 3.79 | 96 | 1.65 | 42 | 1.500 | 38 | -- | -- |


*Fitting is rated to the full working pressure of the hose

AX Series Fittings

| | | | | | | | | |
|---|---|---|---|----------------------------|--|------------------------|---|--------------------------|
| AX Series Crimp Fittings | 01 | NPT - Male | 02 | NPT - Female | 06 | JIC 37° Flare - Female | AY | Type "M" Swivel - Female |
| |  | |  | |  | |  | |
| | B-21 | | B-21 | | B-22 | | B-22 | |
| | ZE | Waterblast Nozzle - Male | EZ | Waterblast Nozzle - Female | | | | |
|  | |  | | | | | | |
| B-22 | | B-23 | | | | | | |

601AX- NPT Male


Material: Nipple - Carbon steel
Shell - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|------------|----|--------------------------|-----|
| | # | ⊙ | ⋈ | | | | | | | ∅ | ↗ | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 601AX-1-2A | 3 | -02 | 1/8 | 3.2 | 1/16" - 27 | 1.20 | 30 | 0.57 | 14 | 0.440 | 11 | 15,000 | 103 |
| 601AX-2-2A | 3 | -02 | 1/8 | 3.2 | 1/8" - 27 | 1.10 | 28 | 0.47 | 12 | 0.440 | 11 | 15,000 | 103 |
| 601AX-2-3 | 5 | -03 | 3/16 | 4.8 | 1/8" - 27 | 1.28 | 33 | 0.50 | 13 | 0.460 | 12 | 15,000 | 103 |
| 601AX-4-5 | 8 | -05 | 5/16 | 7.9 | 1/4" - 18 | 1.70 | 43 | 0.70 | 18 | 0.625 | 16 | 15,000 | 103 |
| 601AX-6-5 | 8 | -05 | 5/16 | 7.9 | 3/8" - 18 | 1.70 | 43 | 1.02 | 26 | 0.625 | 16 | 15,000 | 103 |

602AX- NPT Female

Material: Nipple - Carbon steel
Shell - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|------------|----|--------------------------|-----|
| | # | ⊙ | ⋈ | | | | | | | ∅ | ↗ | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 602AX-1-2A | 3 | -02 | 1/8 | 3.2 | 1/16" - 27 | 1.50 | 38 | 0.86 | 22 | 0.440 | 11 | 15,000 | 103 |
| 602AX-2-3 | 5 | -03 | 3/16 | 4.8 | 1/8" - 27 | 1.64 | 42 | 0.84 | 21 | 0.520 | 13 | 15,000 | 103 |

AX Series Fittings

606AX- JIC 37° Female Flare


Material: Nipple - Carbon steel
 C - Stainless steel
 Shell - Carbon steel
 C - Stainless steel
 Nut - Carbon steel
 C - Stainless steel

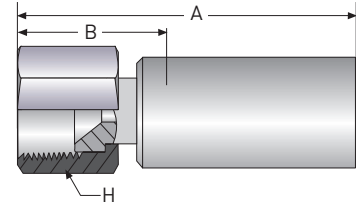

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 606AX-4-2A | 3 | -02 | 1/8 | 3.2 | 7/16" - 20 | 1.53 | 39 | 0.88 | 22 | 0.630 | 16 | 10,000 | 69 |
| 606AX-4-3C | 5 | -03 | 3/16 | 4.8 | 7/16" - 20 | 1.84 | 47 | 0.86 | 22 | 0.560 | 14 | 10,000 | 69 |

6AYAX- Type "M" Swivel - Female

Material: Nipple - Carbon steel
 Shell - Carbon steel
 Nut - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 6AYAX-6-2A | 3 | -02 | 1/8 | 3.2 | 9/16" - 18 | 1.52 | 39 | 0.86 | 22 | 0.750 | 19 | -- | -- |
| 6AYAX-6-3 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 1.77 | 45 | 0.94 | 24 | 0.750 | 19 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6ZEAX- Waterblast Nozzle - Male

Material: Nipple - Carbon steel
 Shell - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ∅ | | ↻ | |
| 6ZEAX-5-2A | 3 | -02 | 1/8 | 3.2 | 5/16" - 24 | 1.31 | 33 | 0.69 | 18 | 0.440 | 11 | -- | -- |


*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

AX Series Fittings

6EZAX- Waterblast Nozzle - Female


Material: Nipple - Carbon steel
Shell - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ∅ | | ↗ | |
| 6EZAX-5-2A | 3 | -02 | 1/8 | 3.2 | 5/16" - 24 | 1.50 | 38 | 0.90 | 23 | 0.440 | 11 | -- | -- |


*Fitting is rated to the full working pressure of the hose

BL Series Fittings

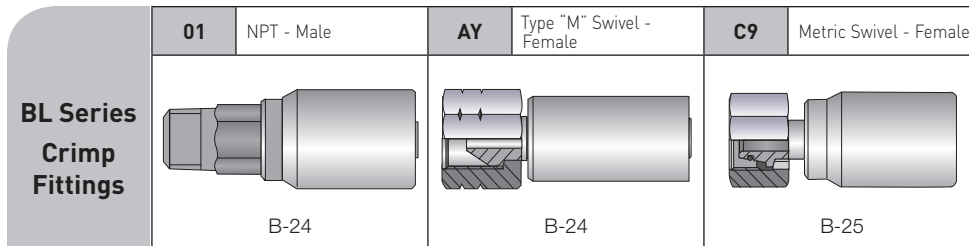

101BL- NPT Male


Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 101BL-6-06 | 10 | -06 | 3/8 | 9.5 | 3/8" - 18 | 3.15 | 80 | 1.38 | 35 | 0.870 | 22 | 15,000 | 103 |
| 101BL-8-08 | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.54 | 90 | 1.77 | 45 | 0.870 | 22 | 15,000 | 103 |
| 101BL-8-08C | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.54 | 90 | 1.77 | 45 | 0.870 | 22 | 15,000 | 103 |
| 101BL-12-12 | 20 | -12 | 3/4 | 19.0 | 3/4" - 14 | 3.86 | 98 | 1.77 | 45 | 1.180 | 30 | 10,000 | 69 |

1AYBL- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel
 Nut - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|--------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↻ | |
| 1AYBL-11-06 | 10 | -06 | 3/8 | 9.5 | 1" - 12 | 3.03 | 77 | 1.24 | 31 | 1.250 | 32 | -- | -- |
| 1AYBL-11-08 | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.03 | 77 | 1.24 | 31 | 1.250 | 32 | -- | -- |
| 1AYBL-11-08C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.03 | 77 | 1.24 | 31 | 1.250 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose


For detailed ordering information, please consult price list or contact Parflex Division.



BL Series Fittings

1C9BL- Metric Swivel - Female


Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|-----|-----|------|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | # | ⊙ | ⌘ | | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1C9BL-14-06 | 10 | -06 | 3/8 | 9.5 | M 22 x 1.5 | 3.15 | 80 | 1.43 | 36 | 1.180 | 30 | -- | -- |
| 1C9BL-16-06 | 10 | -06 | 3/8 | 9.5 | M 24 x 1.5 | 3.31 | 84 | 1.43 | 36 | 1.180 | 30 | -- | -- |
| 1C9BL-14-08 | 12 | -08 | 1/2 | 12.7 | M 22 x 1.5 | 3.15 | 80 | 1.43 | 36 | 1.060 | 27 | -- | -- |
| 1C9BL-16-08 | 12 | -08 | 1/2 | 12.7 | M 24 x 1.5 | 3.15 | 80 | 1.43 | 36 | 1.180 | 30 | -- | -- |
| 1C9BL-25-12 | 20 | -12 | 3/4 | 19.0 | M 36 x 2.0 | 3.82 | 97 | 1.75 | 44 | 1.810 | 46 | -- | -- |


*Fitting is rated to the full working pressure of the hose

BS Series Fittings

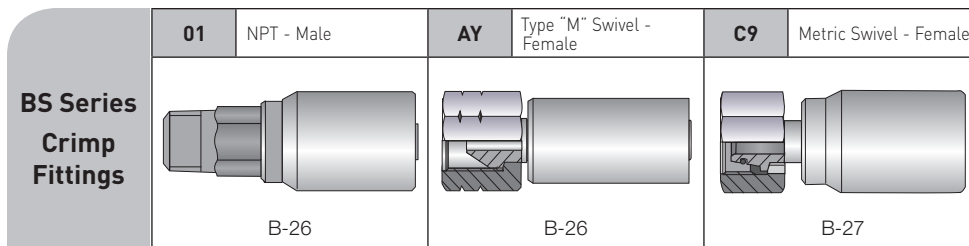

101BS- NPT Male


Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋯ | | | | | ⬡ | | ↻ | |
| 101BS-8-08 | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.66 | 93 | 1.56 | 40 | 0.870 | 22 | 15,000 | 103 |
| 101BS-8-08C | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.66 | 93 | 1.56 | 40 | 0.870 | 22 | 15,000 | 103 |

1AYBS- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|--------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋯ | | | | | ⬡ | | ↻ | |
| 1AYBS-11-08 | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.03 | 77 | 1.24 | 31 | 1.250 | 32 | -- | -- |
| 1AYBS-11-08C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.03 | 77 | 1.24 | 31 | 1.250 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-26

BS Series Fittings

1C9BS- Metric Swivel - Female


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| 1C9BS-16-08 | 12 | -08 | 1/2 | 12.7 | M 24 x 1.5 | 3.50 | 89 | 1.43 | 36 | 1.180 | 30 | -- | -- |


*Fitting is rated to the full working pressure of the hose

CR Series Fittings

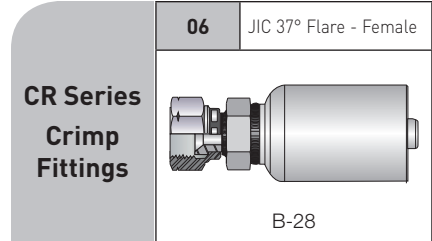


606CR- JIC 37° Female Flare

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|--------------|--------------|------|------|------|--------------|------------------|-----|--------------------|----|-------|----|--------------------------|------|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| 606CR-8-8C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 3.88 | 98 | 2.13 | 54 | 1.000 | 25 | 5,000 | 34.5 |
| 606CR-16-16C | 25 | -16 | 1 | 25.4 | 1 5/16" - 12 | 5.00 | 127 | 2.75 | 70 | 1.625 | 41 | 5,000 | 34.5 |

E2 Series Subsea Fittings

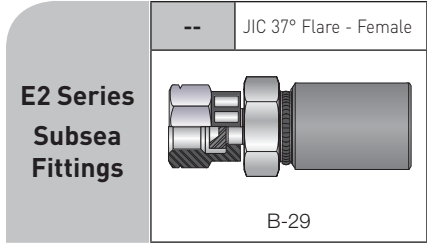







E2 - JIC 37° Female Flare

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|------|--------------|------------------|-----|--------------------|------|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| E206JCC3 | 4 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.12 | 54 | 1.20 | 30 | 0.63 | 16 | 10,000 | 69 |
| E206JEC3 | 4 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.20 | 56 | 1.12 | 28 | 0.75 | 19 | 10,000 | 69 |
| E213JFC4 | 8 | -08 | 1/2 | 12.7 | 3/4" - 16 | 3.35 | 85 | 1.61 | 41 | 0.94 | 24 | 10,000 | 69 |
| E220JHC1 | 12 | -12 | 3/4 | 19.0 | 1 1/16" - 12 | 4.00 | 102 | 2.16 | 54.7 | 1.42 | 36 | 6,017 | 42 |
| E225JIC3 | 16 | -16 | 1 | 25.4 | 1 5/16" - 12 | 4.30 | 109 | 2.10 | 53 | 1.63 | 41 | 4,060 | 28 |

E3 Series* Subsea Fittings
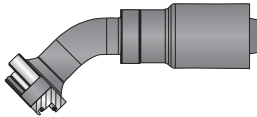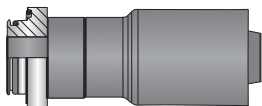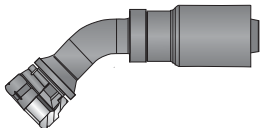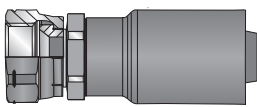
| | | | | | | | | |
|---|---|---|---|---------------|--|--------------------|---|---------|
| E3 Series Subsea Fittings | 9W | 90° Dual Seal | 9M | 45° Dual Seal | 9G | Straight Dual Seal | 39 | 90° JIC |
| |  | |  | |  | |  | |
| | B-30 | | B-30 | | B-31 | | B-31 | |
| | 37 | 45° JIC | 06 | Straight JIC | *PATENT PENDING | | | |
|  | |  | | | | | | |
| B-32 | | B-32 | | | | | | |

19WE3 - 90° Dual Seal


Material: Nipple - Stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Flange Size | A Overall Length | | B Cutoff Allowance | | F | | E | | Maximum Working Pressure | |
|--------------|--------------|-----|-----|------|-------------|------------------|------|--------------------|------|------|------|------|------|--------------------------|-----|
| | # | ⊙ | | | | inch | inch | mm | inch | mm | inch | mm | inch | mm | psi |
| 19WE3-8-8C | 12 | -08 | 1/2 | 12.7 | 1/2 | 4.11 | 104 | 2.44 | 62 | 1.25 | 32 | 2.11 | 54 | 5,000 | 34 |
| 19WE3-16-8C | 12 | -08 | 1/2 | 12.7 | 1 | 4.11 | 104 | 2.44 | 62 | 1.88 | 48 | 2.17 | 55 | 5,000 | 34 |
| 19WE3-16-16C | 25 | -16 | 1 | 25.4 | 1 | 5.45 | 138 | 3.13 | 80 | 1.88 | 48 | 3.27 | 83 | 5,000 | 34 |
| 19WE3-24-16C | 25 | -16 | 1 | 25.4 | 1-1/2 | 5.88 | 149 | 3.38 | 86 | 2.50 | 64 | 3.52 | 89 | 5,000 | 34 |

19ME3 - 45° Dual Seal

Material: Nipple - Stainless steel
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Flange Size | A Overall Length | | B Cutoff Allowance | | F | | E | | Maximum Working Pressure | |
|--------------|--------------|-----|-----|------|-------------|------------------|------|--------------------|------|------|------|------|------|--------------------------|-----|
| | # | ⊙ | | | | inch | inch | mm | inch | mm | inch | mm | inch | mm | psi |
| 19ME3-8-8C | 12 | -08 | 1/2 | 12.7 | 1/2 | 4.49 | 114 | 2.68 | 68 | 1.25 | 32 | 0.87 | 22 | 5,000 | 34 |
| 19ME3-16-8C | 12 | -08 | 1/2 | 12.7 | 1 | 4.53 | 115 | 2.68 | 68 | 1.88 | 48 | 0.92 | 23 | 5,000 | 34 |
| 19ME3-16-16C | 25 | -16 | 1 | 25.4 | 1 | 6.24 | 158 | 3.88 | 99 | 1.88 | 48 | 1.42 | 36 | 5,000 | 34 |
| 19ME3-24-16C | 25 | -16 | 1 | 25.4 | 1-1/2 | 6.32 | 161 | 3.93 | 100 | 2.50 | 64 | 1.86 | 47 | 5,000 | 34 |

For detailed ordering information, please consult price list or contact Parflex Division.

E3 Series* Subsea Fittings

19GE3 - Straight Dual Seal


Material: Nipple - Stainless steel
Shell - Stainless steel

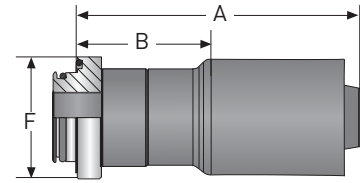

| Part Number | Nominal I.D. | | | | Flange Size | A Overall Length | | B Cutoff Allowance | | F | | Maximum Working Pressure | |
|--------------|--------------|------|------|------|-------------|------------------|-----|--------------------|----|------|----|--------------------------|-----|
| | # | ⊙ | | | | | | | | | | | |
| | DN | Size | inch | mm | inch | inch | mm | inch | mm | inch | mm | psi | MPa |
| 19GE3-8-8C | 12 | -08 | 1/2 | 12.7 | 1/2 | 3.26 | 83 | 1.56 | 40 | 1.25 | 32 | 5,000 | 34 |
| 19GE3-16-8C | 12 | -08 | 1/2 | 12.7 | 1 | 3.26 | 83 | 1.56 | 40 | 1.25 | 32 | 5,000 | 34 |
| 19GE3-16-16C | 25 | -16 | 1 | 25.4 | 1 | 4.35 | 110 | 2.00 | 51 | 1.88 | 48 | 5,000 | 34 |
| 19GE3-24-16C | 25 | -16 | 1 | 25.4 | 1-1/2 | 4.48 | 114 | 2.13 | 54 | 2.50 | 64 | 5,000 | 34 |

139E3 - 90° JIC

Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | E | | Maximum Working Pressure | |
|------------------|--------------|------|------|------|--------------|------------------|-----|--------------------|----|-------|----|------|----|--------------------------|-----|
| | # | ⊙ | | | | | | | | | | | | | |
| | DN | Size | inch | mm | inch | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| 139E3-4-4C | 6 | -04 | 1/4 | 6.4 | 7/16" x 20 | 2.41 | 61 | 1.38 | 35 | 5/8 | 16 | 0.83 | 21 | 5,000 | 69 |
| 139E3-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" x 18 | 2.41 | 61 | 1.38 | 35 | 3/4 | 19 | 0.91 | 23 | 5,000 | 69 |
| 139E3-8-8C-411 | 12 | -08 | 1/2 | 12.7 | 3/4" x 16 | 4.11 | 104 | 2.44 | 62 | 15/16 | 24 | 2.11 | 54 | 5,000 | 69 |
| 139E3-16-16C-411 | 25 | -16 | 1 | 25.4 | 1-5/16" x 12 | 5.69 | 145 | 3.32 | 84 | 1-5/8 | 41 | 3.27 | 83 | 5,000 | 69 |

***PATENT PENDING**

E3 Series* Subsea Fittings

137E3 - 45° JIC


Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | E | | Maximum Working Pressure | |
|------------------|--------------|------|------|------|--------------|------------------|-----|--------------------|-----|-------|----|------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌘ | | | | | ⬡ | | | | ⌚ | |
| 137E3-4-4C | 6 | -04 | 1/4 | 6.4 | 7/16" x 20 | 2.51 | 64 | 1.50 | 38 | 5/8 | 16 | 0.39 | 10 | 5,000 | 35 |
| 137E3-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" x 18 | 2.70 | 69 | 1.68 | 43 | 3/4 | 19 | 0.43 | 11 | 5,000 | 35 |
| 137E3-8-8C-411 | 12 | -08 | 1/2 | 12.7 | 3/4" x 16 | 4.75 | 121 | 3.06 | 78 | 15/16 | 24 | 1.14 | 29 | 5,000 | 35 |
| 137E3-16-16C-411 | 25 | -16 | 1 | 25.4 | 1-5/16" x 12 | 6.50 | 165 | 4.13 | 105 | 1-5/8 | 41 | 1.69 | 43 | 5,000 | 35 |

106E3 - Straight JIC

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | H Hex | | Maximum Working Pressure | |
|--------------|--------------|------|------|------|--------------|------------------|-----|--------------------|----|-------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⌘ | | | | | ⬡ | | ⬡ | | ⌚ | |
| 106E3-4-4C | 6 | -04 | 1/4 | 6.4 | 7/16" x 20 | 2.46 | 62 | 1.44 | 37 | 5/8 | 16 | 5/8 | 16 | 5,000 | 35 |
| 106E3-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" x 18 | 2.55 | 65 | 1.50 | 38 | 3/4 | 19 | 5/8 | 16 | 5,000 | 35 |
| 106E3-8-8C | 12 | -08 | 1/2 | 12.7 | 3/4" x 16 | 3.55 | 90 | 1.88 | 48 | 1 | 25 | 15/16 | 24 | 5,000 | 35 |
| 106E3-16-16C | 25 | -16 | 1 | 25.4 | 1-5/16" x 12 | 4.76 | 121 | 2.38 | 60 | 1-5/8 | 41 | 1-1/2 | 41 | 5,000 | 35 |

***PATENT PENDING**

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



B-32

Hose
A

Fittings
B


Adapters &
Valves
C

Quick Couplings
D

Accessories
E


General Technical
F

EX Series Fittings

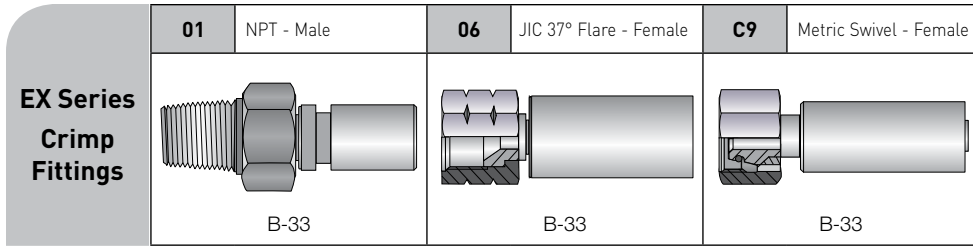

101EX- NPT Male


Material: Nipple - Carbon steel, zinc-plated Shell - Carbon steel, zinc-plated
 C - Nipple - Stainless steel Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | |
| 101EX-4-012 | 2 | -012 | 5/64 | 2 | 1/4" - 18 | 1.54 | 39 | 1.10 | 28 | 0.560 | 14 | 15,000 | 103 |
| 101EX-2-012 | 2 | -012 | 5/64 | 2 | 1/8" - 27 | 1.37 | 35 | 0.93 | 24 | 0.44 | 11 | 15,000 | 103 |
| 601EX-2-2C | 3 | -02 | 1/8 | 3.2 | 1/8" - 27 | 1.33 | 34 | .93 | 24 | 0.44 | 11 | 15,000 | 103 |

106EX- JIC 37° Female Flare


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | |
| 106EX-4-012 | 2 | -012 | 5/64 | 2 | 7/16" - 20 | 1.00 | 25 | 0.55 | 14 | 0.670 | 17 | 10,000 | 69 |
| 106EX-4-02 | 3 | -02 | 1/8 | 3.2 | 7/16" - 20 | .945 | 24 | 0.55 | 14 | 0.670 | 17 | 10,000 | 69 |

1C9EX- Metric Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | |
| 1C9EX-8-012 | 2 | -012 | 5/64 | 2 | M 16 x 1.5 | 1.50 | 37 | 1.14 | 29 | 0.750 | 19 | -- | -- |
| 1C9EX-6-012 | 2 | -012 | 5/64 | 2 | M 14 x 1.5 | 1.30 | 32 | 0.83 | 21 | 0.670 | 17 | -- | -- |
| 1C9EX-8-02 | 3 | -02 | 1/8 | 3.2 | M 16 x 1.5 | 1.30 | 32 | 0.87 | 22 | 0.750 | 19 | -- | -- |


*Fitting is rated to the full working pressure of the hose



For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd

HP Series Fittings

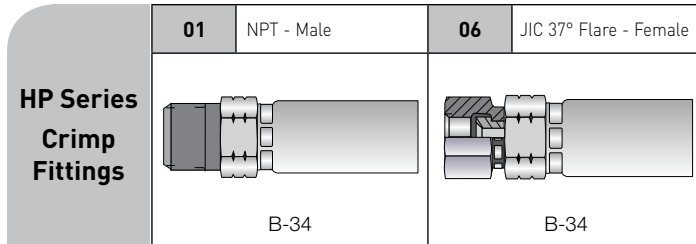

101HP- NPT Male


Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 101HP-2-3 | 5 | -03 | 3/16 | 4.8 | 1/8" - 27 | 1.94 | 49 | 1.19 | 30 | 0.560 | 14 | 15,000 | 103 |
| 101HP-4-3 | 5 | -03 | 3/16 | 4.8 | 1/4" - 18 | 2.12 | 54 | 1.38 | 35 | 0.690 | 17 | 15,000 | 103 |
| 101HP-6-3 | 5 | -03 | 3/16 | 4.8 | 3/8" - 18 | 2.22 | 56 | 1.50 | 38 | 0.750 | 19 | 15,000 | 103 |
| 101HP-2-4 | 6 | -04 | 1/4 | 6.4 | 1/8" - 27 | 2.10 | 53 | 1.19 | 30 | 0.630 | 16 | 15,000 | 103 |
| 101HP-4-4 | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.28 | 58 | 1.38 | 35 | 0.690 | 17 | 15,000 | 103 |
| 101HP-6-4 | 6 | -04 | 1/4 | 6.4 | 3/8" - 18 | 2.38 | 60 | 1.38 | 35 | 0.750 | 19 | 15,000 | 103 |
| 101HP-6-4C | 6 | -04 | 1/4 | 6.4 | 3/8" - 18 | 2.38 | 60 | 1.38 | 35 | 0.750 | 19 | 15,000 | 103 |
| 101HP-4-6 | 10 | -06 | 3/8 | 9.5 | 1/4" - 18 | 2.70 | 69 | 1.50 | 38 | 0.750 | 19 | 15,000 | 103 |
| 101HP-6-6 | 10 | -06 | 3/8 | 9.5 | 3/8" - 18 | 2.70 | 69 | 1.50 | 38 | 0.750 | 19 | 15,000 | 103 |
| 101HP-8-6 | 10 | -06 | 3/8 | 9.5 | 1/2" - 14 | 2.96 | 75 | 1.75 | 44 | 0.940 | 24 | 15,000 | 103 |

106HP- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 106HP-4-3 | 5 | -03 | 3/16 | 4.8 | 7/16" - 20 | 2.20 | 56 | 1.44 | 37 | 0.630 | 16 | 10,000 | 69 |
| 106HP-4-4 | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.49 | 63 | 1.56 | 40 | 0.630 | 16 | 10,000 | 69 |
| 106HP-4-4C | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.49 | 63 | 1.56 | 40 | 0.630 | 16 | 10,000 | 69 |
| 106HP-6-4 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.59 | 66 | 1.69 | 43 | 0.750 | 19 | 10,000 | 69 |
| 106HP-6-6 | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 | 2.91 | 74 | 1.63 | 41 | 0.750 | 19 | 10,000 | 69 |
| 106HP-6-6C | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 | 2.91 | 74 | 1.63 | 41 | 0.750 | 19 | 10,000 | 69 |
| 106HP-8-6C | 10 | -06 | 3/8 | 9.5 | 3/4" - 16 | 3.10 | 79 | 1.80 | 46 | 0.938 | 24 | 10,000 | 69 |

For detailed ordering information, please consult price list or contact Parflex Division.






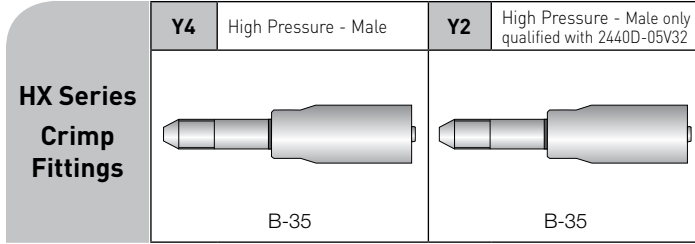


HX Series Fittings



6Y4HX- High Pressure Male

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|----------------|--------------|---|------|-----|-------------|---|-----|--|----|---|----|---|-----|
| | # |  | | | |  | |  | |  | |  | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6Y4HX-9-5C-XLT | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 | 5.00 | 127 | 3.38 | 86 | 1.000 | 25 | -- | -- |


*Fitting is rated to the full working pressure of the hose






6Y2HX- High Pressure Male

only qualified with 2440D-05V32

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated




Note: -THD: Extra long thread
-LONG: Extra long tube



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-----------------|--------------|---|------|-----|---------------|---|-----|--|----|---|----|---|-----|
| | # |  | | | |  | |  | |  | |  | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6Y2HX-9-5C-THD | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 LH | 3.83 | 97 | 2.13 | 54 | .95 | 24 | -- | -- |
| 6Y2HX-9-5C-LONG | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 LH | 4.53 | 115 | 2.83 | 72 | .95 | 24 | -- | -- |


*Fitting is rated to the full working pressure of the hose

KY Series Fittings
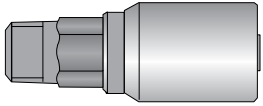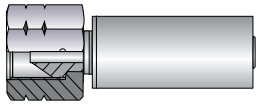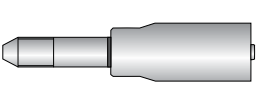
| | | | |
|--------------------------------|---|---|--|
| KY Series Crimp Fittings | 01 NPT - Male | AY Type "M" Swivel - Female | Y4 High Pressure - Male |
| |  B-36 |  B-36 |  B-37 |

101KY- NPT Male


Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | # | ⊙ | ⌀ | ⌀ | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 101KY-4-04 | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.22 | 56 | 1.14 | 29 | 0.390 | 10 | 15,000 | 103 |
| 101KY-4-05 | 8 | -05 | 5/16 | 7.9 | 1/4" - 18 | 2.70 | 69 | 1.42 | 36 | 0.511 | 13 | 15,000 | 103 |
| 101KY-6-04 | 6 | -04 | 1/4 | 6.4 | 3/8" - 18 | 2.64 | 67 | 1.38 | 35 | 0.670 | 17 | 15,000 | 103 |

1AYKY- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated
Nut - Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | # | ⊙ | ⌀ | ⌀ | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1AYKY-6-04 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.28 | 58 | 0.98 | 25 | 0.748 | 19 | 15,000 | 103 |
| 1AYKY-8-05 | 8 | -05 | 5/16 | 7.9 | 3/4" - 16 | 2.64 | 67 | 1.22 | 31 | 1.063 | 27 | 15,000 | 103 |

For detailed ordering information, please consult price list or contact Parflex Division.

KY Series Fittings

1Y4KY- High Pressure - Male














Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|------------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ∅ | | ↗ | |
| 1Y4KY-9-05 | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 | 3.90 | 99 | 2.60 | 66 | 0.787 | 20 | -- | -- |


*Fitting is rated to the full working pressure of the hose





LX Series Fittings

| | | | | |
|---|---|---|--|---|
| LX Series Crimp Fittings | 01 NPT - Male | 06 JIC 37° Flare - Female | 92 BSP Swivel - Female | 5Y Medium Pressure Swivel - Female |
| |  B-38 |  B-39 |  B-40 |  B-40 |
| | 6Y High Pressure Swivel - Female | AY Type "M" Swivel - Female | C9 Metric Swivel - Female | HE Hammer Union - Male Cone |
| |  B-41 |  B-41 |  B-42 |  B-43 |
| | HN Hammer Union - Female Cone | HY Waterblast Nozzle - Female | Y2 Medium Pressure - Male | Y4 High Pressure - Male |
| |  B-43 |  B-44 |  B-45 |  B-46 |
| | YH Waterblast Nozzle - Male |  B-47 | | |

601LX- NPT Male

Material: Nipple - High strength steel
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|--------------|---|---|------|------|-------------|------------------|-----|--------------------|----|---|---|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # |  |  | | | | | | | |  |  | | |
| 601LX-2-2AC | 3 | -02 | 1/8 | 3.2 | 1/8" - 27 | 1.90 | 48 | 0.76 | 19 | 0.500 | 13 | 15,000 | 103 |
| 601LX-4-3 | 5 | -03 | 3/16 | 4.8 | 1/4" - 18 | 2.86 | 73 | 1.30 | 33 | 0.560 | 14 | 15,000 | 103 |
| 601LX-4-4C | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.62 | 67 | 1.34 | 34 | 0.630 | 16 | 15,000 | 103 |
| 601LX-4-5 | 8 | -05 | 5/16 | 7.9 | 1/4" - 18 | 2.78 | 71 | 1.18 | 30 | 0.630 | 16 | 15,000 | 103 |
| 601LX-4-5C | 8 | -05 | 5/16 | 7.9 | 1/4" - 18 | 2.78 | 71 | 1.18 | 30 | 0.630 | 16 | 15,000 | 103 |
| 601LX-6-5 | 8 | -05 | 5/16 | 7.9 | 3/8" - 18 | 3.96 | 75 | 1.37 | 35 | 0.750 | 19 | 15,000 | 103 |
| 601LX-6-5C | 8 | -05 | 5/16 | 7.9 | 3/8" - 18 | 3.96 | 75 | 1.37 | 35 | 0.750 | 19 | 15,000 | 103 |
| 601LX-8-8 | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.75 | 95 | 1.70 | 43 | 1.130 | 29 | 15,000 | 103 |
| 601LX-8-8C | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.75 | 95 | 1.70 | 43 | 1.130 | 29 | 15,000 | 103 |
| 601LX-12-12C | 20 | -12 | 3/4 | 19.0 | 3/4" - 14 | 4.75 | 121 | 2.10 | 53 | 1.380 | 35 | 10,000 | 69 |
| 601LX-16-12C | 20 | -12 | 3/4 | 19.0 | 1" - 11 1/2 | 4.90 | 124 | 2.25 | 57 | 1.380 | 35 | 10,000 | 69 |
| 601LX-16-16C | 25 | -16 | 1 | 25.4 | 1" - 11 1/2 | 5.00 | 125 | 2.50 | 64 | 1.380 | 35 | 10,000 | 69 |

For detailed ordering information, please consult price list or contact Parflex Division.

LX Series Fittings

101LX- NPT Male


Material: Nipple - Carbon steel, zinc-plated C - Stainless steel
 Shell - Carbon steel, zinc-plated C - Stainless steel
 Nut - Carbon steel, zinc-plated C / SUBSEA - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | |
| 101LX-4-04 | 6 | -04 | 1/4 | 6.4 | 1/4"-18 | 3.15 | 80 | 1.42 | 36 | 0.560 | 14 | 15,000 | 103 |
| 101LX-4-04C | 6 | -04 | 1/4 | 6.4 | 1/4"-18 | 3.15 | 80 | 1.42 | 36 | 0.560 | 14 | 15,000 | 103 |
| 101LX-6-04 | 6 | -04 | 1/4 | 6.4 | 3/8"-18 | 3.15 | 80 | 1.42 | 36 | 0.750 | 19 | 15,000 | 103 |
| 101LX-8-08 | 12 | -08 | 1/2 | 12.7 | 1/2"-14 | 3.58 | 91 | 1.46 | 37 | 0.87 | 22 | 15,000 | 103 |
| 101LX-8-08C | 12 | -08 | 1/2 | 12.7 | 1/2"-14 | 3.58 | 91 | 1.46 | 37 | 0.87 | 22 | 15,000 | 103 |

606LX- JIC 37° Female Flare


Material: Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|--------------|--------------|------|------|------|--------------|------------------|-----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | |
| 606LX-6-5C | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 | 2.70 | 69 | 1.10 | 28 | 0.75 | 19 | 10,000 | 69 |
| 606LX-8-5C | 8 | -05 | 5/16 | 7.9 | 3/4" - 16 | 2.82 | 72 | 1.22 | 31 | 1.00 | 25 | 10,000 | 69 |
| 606LX-8-8C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 3.80 | 96 | 1.75 | 44 | 1.063 | 27 | 10,000 | 69 |
| 606LX-16-12C | 20 | -12 | 3/4 | 19.0 | 1-5/16" - 12 | 4.29 | 109 | 1.68 | 43 | 1.50 | 38 | 10,000 | 69 |
| 606LX-16-16C | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 3.79 | 96 | 1.65 | 42 | 1.50 | 38 | 10,000 | 69 |

106LX- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated C - Stainless steel
 Shell - Carbon steel, zinc-plated C - Stainless steel
 Nut - Carbon steel, zinc-plated C / SUBSEA - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|----------------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | |
| 106LX-6-04C | 6 | -04 | 1/4 | 6.4 | 9/16"-18 | 3.03 | 77 | 1.26 | 32 | 0.75 | 19 | 10,000 | 69 |
| 106LX-6-05C | 8 | -05 | 5/16 | 7.9 | 9/16"-18 | 3.07 | 78 | 1.30 | 33 | 0.75 | 19 | 10,000 | 69 |
| 106LX-8-08 | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 2.52 | 64 | 0.83 | 21 | 1.06 | 27 | 10,000 | 69 |
| 106LX-8-08C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 2.52 | 64 | 0.83 | 21 | 1.06 | 27 | 10,000 | 69 |
| 106LX-6-06C-M-SUBSEA | 10 | -06 | 3/8 | 9.5 | 9/16"-18 | 2.32 | 59 | 0.71 | 18 | 0.87 | 22 | 10,000 | 69 |
| 106LX-8-06C-M-SUBSEA | 10 | -06 | 3/8 | 9.5 | 3/4"-16 | 2.32 | 59 | 0.75 | 19 | 0.94 | 24 | 10,000 | 69 |
| 106LX-8-08C-M-SUBSEA | 12 | -08 | 1/2 | 12.7 | 3/4"-16 | 2.52 | 64 | 0.83 | 21 | 1.06 | 27 | 10,000 | 69 |

LX Series Fittings

692LX- BSP Swivel - Female

Material: Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - -3 size: Stainless steel
 -5 size: Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|------------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| 692LX-4-3C | 5 | -03 | 3/16 | 4.8 | G 1/4" - 19 BSPP | 2.83 | 72 | 1.30 | 33 | 0.88 | 22 | -- | -- |
| 692LX-6-5C | 8 | -05 | 5/16 | 7.9 | G 3/8" - 19 BSPP | 2.90 | 74 | 1.20 | 30 | 1.06 | 27 | -- | -- |

*Fitting is rated to the full working pressure of the hose

192LX- BSP Swivel - Female

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|------------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| 192LX-8-08C | 12 | -08 | 1/2 | 12.7 | G 1/2" - 14 BSPP | 2.95 | 75 | 0.82 | 21 | 1.18 | 30 | -- | -- |

*Fitting is rated to the full working pressure of the hose

65YLX- Medium Pressure Female Swivel

Material: Nipple - High strength steel
 C - High strength stainless steel
 Shell - Carbon steel, zinc-plated
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ⬡ | | ↗ | |
| 65YLX-6-3 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 3.08 | 78 | 1.53 | 39 | 0.75 | 19 | 20,000 | 138 |
| 65YLX-6-3C | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 3.20 | 81 | 1.67 | 42 | 0.75 | 19 | 20,000 | 138 |
| 65YLX-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.84 | 72 | 1.54 | 39 | 0.75 | 19 | 20,000 | 138 |

For detailed ordering information, please consult price list or contact Parflex Division.

LX Series Fittings

66YLX- High Pressure Female Swivel

Material: Nipple - High strength steel
 C - High strength stainless steel
 Shell - Carbon steel, zinc-plated
 Nut - Stainless steel

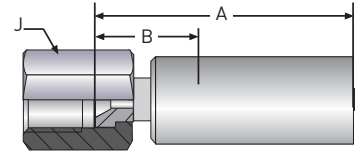


| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 66YLX-4-3 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 2.80 | 71 | 1.28 | 33 | 0.75 | 19 | -- | -- |
| 66YLX-4-3C | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 2.93 | 74 | 1.42 | 36 | 0.68 | 17 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1AYLX- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel
 Nut - Carbon steel, zinc-plated
 C - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|--------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1AYLX-6-02 | 3 | -02 | 1/8 | 3.2 | 9/16" - 18 | 1.89 | 48 | 1.02 | 26 | 0.87 | 22 | -- | -- |
| 1AYLX-6-04 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.40 | 61 | 1.13 | 29 | 0.87 | 22 | -- | -- |
| 1AYLX-6-04C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.95 | 75 | 1.26 | 32 | 0.87 | 22 | -- | -- |
| 1AYLX-8-05C | 8 | -05 | 5/16 | 7.9 | 3/4" - 16 | 2.76 | 70 | 1.22 | 31 | 1.06 | 27 | -- | -- |
| 1AYLX-11-08 | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.19 | 81 | 1.06 | 27 | 1.26 | 32 | -- | -- |
| 1AYLX-11-08C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.19 | 81 | 1.06 | 27 | 1.26 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose

LX Series Fittings

6AYLX- Type "M" Swivel - Female

- Material:** Nipple - High strength steel
 C - High strength stainless steel
 SD / HCL / SUBSEA - High strength, corrosion-resistant stainless steel
- Shell -** Carbon steel, zinc-plated
 C / SD / HCL / SUBSEA - Stainless steel
- Nut -** Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|---------------------|--------------|-----|------|------|--------------|------------------|------|--------------------|------|-------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6AYLX-6-2AC | 3 | -02 | 1/8 | 3.2 | 9/16" - 18 | 2.51 | 64 | 1.28 | 33 | 0.68 | 17 | -- | -- |
| 6AYLX-6-3 | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 2.80 | 71 | 1.28 | 33 | 0.75 | 19 | -- | -- |
| 6AYLX-6-3C | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 2.93 | 74 | 1.42 | 36 | 0.68 | 17 | -- | -- |
| 6AYLX-6-4 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.69 | 68 | 1.39 | 35 | 0.68 | 17 | -- | -- |
| 6AYLX-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.69 | 68 | 1.39 | 35 | 0.68 | 17 | -- | -- |
| 6AYLX-6-4C-SD | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.54 | 65 | 1.30 | 33 | 0.75 | 19 | -- | -- |
| 6AYLX-8-5C | 8 | -05 | 5/16 | 7.9 | 3/4" - 16 | 2.82 | 72 | 1.22 | 31 | 1.00 | 25 | -- | -- |
| 6AYLX-8-6C | 10 | -06 | 3/8 | 9.5 | 3/4" - 16 | 2.95 | 75 | 1.25 | 32 | 1.00 | 25 | -- | -- |
| 6AYLX-11-8C | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.53 | 90 | 1.50 | 38 | 1.25 | 32 | -- | -- |
| 6AYLX-11-8C-SD | 12 | -08 | 1/2 | 12.7 | 1" - 12 | 3.53 | 90 | 1.50 | 38 | 1.25 | 32 | -- | -- |
| 6AYLX-16-12C | 20 | -12 | 3/4 | 19.0 | 1-5/16" - 12 | 4.15 | 105 | 1.52 | 39 | 1.50 | 38 | -- | -- |
| 6AYLX-16-12C-SD | 20 | -12 | 3/4 | 19.0 | 1-5/16" - 12 | 4.29 | 109 | 1.64 | 42 | 1.50 | 38 | -- | -- |
| 6AYLX-16-16C | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 5.45 | 139 | 2.04 | 52 | 1.50 | 38 | -- | -- |
| 6AYLX-16-16C-SD | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 5.45 | 139 | 2.04 | 52 | 1.50 | 38 | -- | -- |
| 6AYLX-16-16-HCL | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 5.45 | 139 | 2.04 | 52 | 1.50 | 38 | -- | -- |
| 6AYLX-8-5C-M-SUBSEA | 8 | -05 | 5/16 | 7.9 | 3/4"-16 | 3.65 | 93 | 1.76 | 45 | 0.88 | 22 | -- | -- |
| 6AYLX-8-6C-M-SUBSEA | 10 | -06 | 3/8 | 9.5 | 3/4"-16 | 3.23 | 82 | 1.45 | 37 | 1.00 | 25 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6C9LX- Metric Swivel - Female

- Material:** Nipple - High strength stainless steel
 Shell - Stainless steel
 Nut - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|--------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6C9LX-16-8C | 12 | -08 | 1/2 | 12.7 | M 24 x 1.5 | 3.48 | 88 | 1.44 | 37 | 1.26 | 32 | -- | -- |
| 6C9LX-25-12C | 20 | -12 | 3/4 | 19.0 | M 36 x 2 | 4.26 | 108 | 1.58 | 40 | 1.81 | 46 | -- | -- |
| 6C9LX-30-16C | 25 | -16 | 1 | 25.4 | M 42 x 2 | 4.65 | 118 | 2.05 | 52 | 1.97 | 50 | -- | -- |


*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

LX Series Fittings

1C9LX- Metric Swivel - Female

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | J Hex | | Maximum Working Pressure* | |
|--------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1C9LX-16-08C | 12 | -08 | 1/2 | 12.7 | M 24 x 1.5 | 3.46 | 88 | 1.34 | 34 | 1.26 | 32 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6HELX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
 Shell - Stainless steel
 Nut - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-----------------|--------------|-----|------|------|--------------------|------------------|------|--------------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | psi |
| 6HELX-16-16-HCL | 25 | -16 | 1 | 25.4 | 2-5/16" - 2.5 ACME | 6.00 | 153 | 3.63 | 92 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6HNLX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
 Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-----------------|--------------|-----|------|------|--------------------|------------------|------|--------------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | psi |
| 6HNLX-16-16-HCL | 25 | -16 | 1 | 25.4 | 2-5/16" - 2.5 ACME | 6.00 | 153 | 3.63 | 92 | -- | -- |

*Fitting is rated to the full working pressure of the hose

LX Series Fittings

1HNLX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength stainless steel
Shell - High strength stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|------------------|--------------|------|------|------|---------------|------------------|-----|--------------------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HNLX-32-16C4462 | 25 | -16 | 1 | 25.4 | 4 1/8"-3 ACME | 5.59 | 142 | 3.43 | 87 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6HYLX- Waterblast Nozzle - Female

Material: Nipple - High strength stainless steel
Shell - Stainless steel

Note: ProLance Fitting

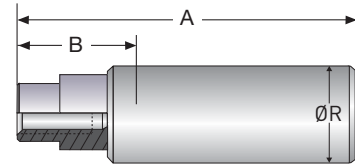

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------------|--------------|------|------|-----|-------------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ∅ | | ↗ | |
| 6HYLX-4-2AC-PL | 4 | -025 | 5/32 | 4 | 1/4" - 28 UNF | 2.01 | 51 | 0.75 | 19 | 0.35 | 9 | -- | -- |
| 6HYLX-4-2AC-PL-LH | 4 | -025 | 5/32 | 4 | 1/4" - 28 UNF LH | 2.01 | 51 | 0.75 | 19 | 0.35 | 9 | -- | -- |
| 6HYLX-4-3C-PL | 5 | -03 | 3/16 | 4.8 | 1/4" - 28 UNF | 2.05 | 52 | 0.75 | 19 | 0.35 | 9 | -- | -- |
| 6HYLX-4-3C-PL-LH | 5 | -03 | 3/16 | 4.8 | 1/4" - 28 UNF LH | 2.05 | 52 | 0.75 | 19 | 0.35 | 9 | -- | -- |
| 6HYLX-6-3C-PL | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 UNF | 2.20 | 56 | 0.91 | 23 | 0.43 | 11 | -- | -- |
| 6HYLX-6-3C-PL-LH | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 UNF LH | 2.20 | 56 | 0.91 | 23 | 0.43 | 11 | -- | -- |
| 6HYLX-6-4C-PL | 5 | -04 | 1/4 | 6.4 | 3/8" - 24 UNF | 2.28 | 58 | 0.98 | 25 | 0.43 | 11 | -- | -- |
| 6HYLX-6-4C-PL-LH | 5 | -04 | 1/4 | 6.4 | 3/8" - 24 UNF LF | 2.28 | 58 | 0.98 | 25 | 0.43 | 11 | -- | -- |
| 6HYLX-9-5C-PL | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 UNF | 2.83 | 72 | 1.10 | 28 | 0.67 | 17 | -- | -- |
| 6HYLX-9-5C-PL-LH | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 UNF LH | 2.83 | 72 | 1.10 | 28 | 0.67 | 17 | -- | -- |

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-44

LX Series Fittings

1HYLX- Waterblast Nozzle - Female

Material: Nipple - High strength stainless steel
Shell - Stainless steel

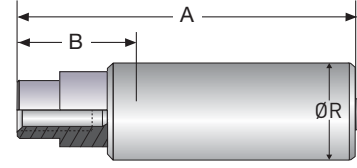


| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|---------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1HYLX-4-02 | 3 | -02 | 1/8 | 3.2 | 1/4"-28 | 1.77 | 45 | 0.87 | 22 | 0.34 | 9 | -- | -- |
| 1HYLX-4-02-LH | 3 | -02 | 1/8 | 3.2 | 1/4"-28 LH | 1.77 | 45 | 0.87 | 22 | 0.34 | 9 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6Y2LX- Medium Pressure - Male

Material: Nipple - High strength stainless steel
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|--------------|--------------|-----|------|------|----------------|------------------|------|--------------------|------|------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6Y2LX-9-5C | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 LH | 2.60 | 66 | 0.88 | 22 | 0.82 | 21 | 20,000 | 138 |
| 6Y2LX-12-5C | 8 | -05 | 5/16 | 7.9 | 3/4" - 16 LH | 3.74 | 95 | 2.05 | 52 | 0.95 | 24 | 20,000 | 138 |
| 6Y2LX-9-6C | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 LH | 3.80 | 97 | 2.04 | 52 | 1.22 | 31 | 20,000 | 138 |
| 6Y2LX-9-8C | 12 | -08 | 1/2 | 12.7 | 9/16" - 18 LH | 4.20 | 107 | 2.20 | 56 | 1.13 | 29 | 20,000 | 138 |
| 6Y2LX-12-8C | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 LH | 4.13 | 105 | 2.08 | 53 | 1.13 | 29 | 20,000 | 138 |
| 6Y2LX-16-12C | 20 | -12 | 3/4 | 19.0 | 1" - 14 UNF LH | 5.39 | 137 | 2.75 | 70 | 1.56 | 40 | 20,000 | 138 |

LX Series Fittings

1Y2LX- Medium Pressure - Male


Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 SUBSEA - High strength stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-----------------------|--------------|-----|------|------|---------------|------------------|------|--------------------|------|------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1Y2LX-6-04 | 6 | -04 | 1/4 | 6.4 | 3/8" - 24 LH | 4.72 | 120 | 2.56 | 65 | 0.67 | 17 | 20,000 | 138 |
| 1Y2LX-9-08C | 12 | -08 | 1/2 | 12.7 | 9/16" - 18 LH | 4.33 | 110 | 2.36 | 60 | 1.22 | 31 | 20,000 | 138 |
| 1Y2LX-12-08C | 12 | -08 | 1/2 | 12.7 | 3/4 - 16 LH | 6.22 | 158 | 4.09 | 104 | 1.22 | 31 | 20,000 | 138 |
| 1Y2LX-12-08C-M-SUBSEA | 12 | -08 | 1/2 | 12.7 | 3/4 - 16 LH | 7.25 | 184 | 4.70 | 119 | 1.30 | 33 | 20,000 | 138 |
| 1Y2LX-16-16C4462 | 25 | -16 | 1 | 25.4 | 1" - 14 LH | 7.13 | 181 | 5.00 | 127 | 1.06 | 27 | 20,000 | 138 |

6Y4LX- High Pressure - Male


Material: Nipple - High strength stainless steel
 Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|-----|------|------|---------------|------------------|------|--------------------|------|------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6Y4LX-4-2AC | 3 | -02 | 1/8 | 3.2 | 1/4" - 28 LH | 2.96 | 75 | 1.71 | 43 | 0.63 | 16 | -- | -- |
| 6Y4LX-6-2AC | 3 | -02 | 1/8 | 3.2 | 3/8" - 24 LH | 3.40 | 86 | 2.16 | 55 | 0.63 | 16 | -- | -- |
| 6Y4LX-6-3C | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 LH | 3.86 | 98 | 2.35 | 60 | 0.67 | 17 | -- | -- |
| 6Y4LX-9-3C | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 LH | 4.20 | 107 | 2.70 | 69 | 0.67 | 17 | -- | -- |

1Y4LX- High Pressure - Male

Material: Nipple - Carbon steel, zinc-plated
 C - Stainless steel
 Shell - Carbon steel, zinc-plated
 C - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|-----|------|------|---------------|------------------|------|--------------------|------|------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 1Y4LX-4-02 | 3 | -02 | 1/8 | 3.2 | 1/4" - 28 LH | 2.47 | 63 | 1.57 | 40 | 0.43 | 11 | -- | -- |
| 1Y4LX-9-08C | 12 | -08 | 1/2 | 12.7 | 9/16" - 18 LH | 4.88 | 124 | 2.75 | 70 | 1.38 | 35 | -- | -- |


For detailed ordering information, please consult price list or contact Parflex Division.

LX Series Fittings

6YHLX- Waterblast Nozzle - Male

Material: Nipple - High strength stainless steel
Shell - Stainless steel

Note: ProLance Fitting
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------------|--------------|------|------|-----|-------------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | # | ⊙ | ⌀ | | | | | | | | | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6YHLX-4-2AC-PL | 4 | -025 | 5/32 | 4 | 1/4" - 28 UNF | 2.28 | 58 | 1.02 | 26 | 0.31 | 8 | -- | -- |
| 6YHLX-4-2AC-PL-LH | 4 | -025 | 5/32 | 4 | 1/4" - 28 UNF LH | 2.28 | 58 | 1.02 | 26 | 0.31 | 8 | -- | -- |
| 6YHLX-4-3C-PL | 5 | -03 | 3/16 | 4.8 | 1/4" - 28 UNF | 2.44 | 62 | 1.14 | 29 | 0.39 | 10 | -- | -- |
| 6YHLX-4-3C-PL-LH | 5 | -03 | 3/16 | 4.8 | 1/4" - 28 UNF LH | 2.44 | 62 | 1.14 | 29 | 0.39 | 10 | -- | -- |
| 6YHLX-6-3C-PL | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 UNF | 2.56 | 65 | 1.26 | 32 | 0.39 | 10 | -- | -- |
| 6YHLX-6-3C-PL-LH | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 UNF LH | 2.56 | 65 | 1.26 | 32 | 0.39 | 10 | -- | -- |
| 6YHLX-6-4C-PL | 6 | -04 | 1/4 | 6.4 | 3/8" - 24 UNF | 2.60 | 66 | 1.42 | 36 | 0.43 | 11 | | |
| 6YHLX-6-4C-PL-LH | 6 | -04 | 1/4 | 6.4 | 3/8" - 24 UNF LH | 2.60 | 66 | 1.42 | 36 | 0.43 | 11 | | |
| 6YHLX-9-5C-PL | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 UNF | 3.15 | 80 | 1.42 | 36 | 0.63 | 16 | -- | -- |
| 6YHLX-9-5C-PL-LH | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 UNF LH | 3.15 | 80 | 1.42 | 36 | 0.63 | 16 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1YHLX- Waterblast Nozzle - Male







Material: Nipple - High strength stainless steel
Shell - Carbon steel, zinc-plated
SC - Nipple - Carbon steel, zinc-plated
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|---------------|--------------|------|------|-----|---------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | # | ⊙ | ⌀ | | | | | | | | | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1YHLX-4-02 | 3 | -02 | 1/8 | 3.2 | 1/4" - 28 | 1.772 | 45 | 0.87 | 22 | 0.34 | 9 | -- | -- |
| 1YHLX-4-02-LH | 3 | -02 | 1/8 | 3.2 | 1/4" - 28 LH | 1.772 | 45 | 0.87 | 22 | 0.34 | 9 | -- | -- |
| 1YHLX-9-06SC | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 LH | 3.126 | 79 | 1.34 | 34 | 1.06 | 27 | -- | -- |



*Fitting is rated to the full working pressure of the hose

NX Series Fittings
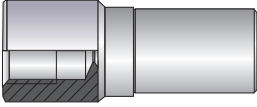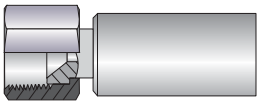
| | | | | | | | | |
|---|---|---|---|----------------------|--|--------------|---|------------------------|
| NX Series Crimp Fittings | 01 | NPT - Male | 01 | *NPT - Male ProLance | 02 | NPT - Female | 06 | JIC 37° Flare - Female |
| |  | |  | |  | |  | |
| | B-48 | | B-48 | | B-49 | | B-49 | |
| | AY | Type "M" Swivel - Female | D9 | BSP Rigid - Male | | | | |
|  | |  | | | | | | |
| B-50 | | B-50 | | | | | | |

601NX- NPT Male

Material: Nipple - Carbon steel
C - Stainless steel
Shell - Carbon steel
C - Stainless steel




NOTE: *ProLance Fitting

| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 601NX-2-4* | 6 | -04 | 1/4 | 6.4 | 1/8" - 27 | 1.44 | 37 | 0.50 | 13 | NA | NA | 15,000 | 103 |
| 601NX-4-4* | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 1.56 | 40 | 1.35 | 34 | NA | NA | 15,000 | 103 |
| 601NX-4-4C | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.38 | 60 | 1.12 | 28 | 0.63 | 16 | 15,000 | 103 |

101NX- NPT Male

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 101NX-4-04 | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.57 | 65 | 1.35 | 34 | 0.63 | 16 | 15,000 | 103 |
| 101NX-6-06 | 10 | -06 | 3/8 | 9.5 | 3/8" - 18 | 2.79 | 71 | 1.20 | 30 | 0.87 | 22 | 15,000 | 103 |
| 101NX-8-08 | 12 | -08 | 1/2 | 12.7 | 1/2" - 14 | 3.11 | 79 | 1.46 | 37 | 0.87 | 22 | 15,000 | 103 |
| 101NX-12-12 | 20 | -12 | 3/4 | 19.0 | 3/4" - 14 | 3.66 | 93 | 1.57 | 40 | 1.06 | 27 | 10,000 | 69 |

For detailed ordering information, please consult price list or contact Parflex Division.

NX Series Fittings

602NX- NPT Female

Material: Nipple - Carbon steel
Shell - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 602NX-4-4 | 6 | -04 | 1/4 | 6.4 | 1/4" - 18 | 2.38 | 60 | 1.12 | 28 | 0.63 | 16 | 15,000 | 103 |

* Prolance

606NX- JIC 37° Female Flare


Material: Nipple - Stainless steel
Shell - Stainless steel
Nut - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 606NX-4-4C | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.23 | 57 | 0.99 | 25 | 0.63 | 16 | 10,000 | 69 |
| 606NX-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.36 | 60 | 1.11 | 28 | 0.68 | 17 | 10,000 | 69 |

106NX- JIC 37° Female Flare

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated
Nut - Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|-------|------|--------------|------------------|------|--------------------|------|-------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 106NX-4-04 | 6 | -04 | 1/4 | 6.4 | 7/16" - 20 | 2.56 | 65 | 1.37 | 35 | 0.75 | 19 | 10,000 | 69 |
| 106NX-6-04 | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.56 | 65 | 1.32 | 34 | 0.75 | 19 | 10,000 | 69 |
| 106NX-6-06 | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 | 2.56 | 65 | 1.32 | 34 | 0.75 | 19 | 10,000 | 69 |
| 106NX-8-06 | 10 | -06 | 3/8 | 9.5 | 3/4" - 16 | 2.82 | 72 | 1.23 | 31 | 0.95 | 24 | 10,000 | 69 |
| 106NX-8-08 | 12 | -08 | 1/2 | 12.7 | 3/4" - 16 | 2.52 | 64 | 0.83 | 21 | 1.06 | 27 | 10,000 | 69 |
| 106NX-12-12 | 20 | -12 | 3/4 | 19.0 | 1-1/16" - 12 | 3.78 | 96 | 1.69 | 43 | 1.42 | 36 | 10,000 | 69 |
| 106NX-16-12 | 20 | -12 | 3/4 | 19.0 | 1-5/16" - 12 | 3.66 | 93 | 1.57 | 40 | 1.61 | 41 | 10,000 | 69 |
| 106NX-16-16 | 25 | -16 | 1 | 25.4 | 1-5/16" - 12 | 3.84 | 98 | 1.67 | 43 | 1.61 | 41 | 10,000 | 69 |
| 106NX-20-20 | 32 | -20 | 1-1/4 | 31.8 | 1 5/8" - 12 | 4.09 | 104 | 1.73 | 44 | 1.97 | 50 | 6,380 | 44 |

NX Series Fittings

6AYNX- Type "M" Swivel - Female

Material: Nipple - Stainless steel
 Shell - Stainless steel
 Nut - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | # | | | | | | | | | | | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6AYNX-6-4C | 6 | -04 | 1/4 | 6.4 | 9/16" - 18 | 2.36 | 60 | 1.11 | 28 | 0.68 | 17 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6D9NX- BSP Rigid - Male


Material: Nipple - High strength steel
 Shell - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|--------------|--------------|------|------|------|-------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | # | | | | | | | | | | | | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6D9NX-8-8-PL | 12 | -08 | 1/2 | 12.7 | G 1/2" - 14 | 2.50 | 64 | 1.00 | 25 | 1.26 | 32 | -- | -- |


*Fitting is rated to the full working pressure of the hose

PL Series Fittings

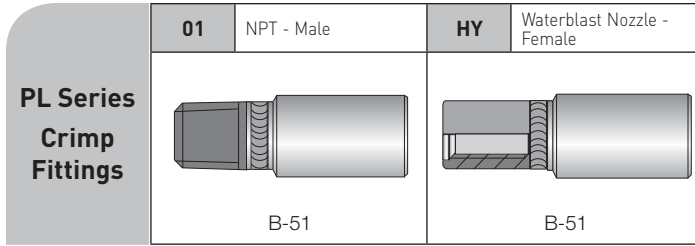

601PL- NPT Male


Material: Nipple - Carbon steel
Shell - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|------------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 601PL-1-2 | 3 | -02 | 1/8 | 3.2 | 1/16" - 27 | 1.06 | 27 | 0.47 | 12 | 0.38 | 10 | 15,000 | 103 |

6HYPL- Waterblast Nozzle - Female




Material: Nipple - Carbon steel
Shell - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|-----|------|------|-------------|------------------|------|--------------------|------|------------|------|---------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 6HYPL-1-2 | 3 | -02 | 1/8 | 3.2 | #12 - 28 | 1.13 | 29 | 0.53 | 13 | 0.38 | 10 | -- | -- |


*Fitting is rated to the full working pressure of the hose

RX Series Reusable Fittings
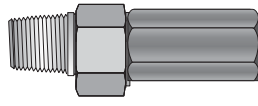
| | | | |
|-----------------------------|---|---|--|
| RX Series Reusable Fittings | 01 NPT - Male | 06 JIC 37° Flare - Female | TU Tube Stub Fitting |
| |  B-52 |  B-52 |  B-53 |

201RX- NPT Male


Material: Nipple - Stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|-----|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | # | ⊙ | ⌀ | ⌀ | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 201RX-2-2C | 3 | -02 | 1/8 | 3.2 | 1/8" - 27 | 1.54 | 39 | 1.10 | 28 | 0.44 | 11 | 15,000 | 103 |

206RX- JIC 37° Female Flare

Material: Nipple - Stainless steel
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|-------------|--------------|-----|-----|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | # | ⊙ | ⌀ | ⌀ | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 206RX-4-2C | 3 | -02 | 1/8 | 3.2 | 7/16" - 20 | 1.56 | 40 | 1.10 | 28 | 0.56 | 14 | 10,000 | 69 |

For detailed ordering information, please consult price list or contact Parflex Division.

RX Series Reusable Fittings

2TURX- Tube Stub






Material: Nipple - Stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|------------|----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ∅ | | ↗ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 2TURX-4-2C | 3 | -02 | 1/8 | 3.2 | 1/4" TUBE | 1.65 | 42 | 1.20 | 30 | 0.38 | 10 | -- | -- |


*Fitting is rated to the full working pressure of the hose

TX Series Fittings

| | | | | | | | | |
|---|---|--------------------------|---|--------------|--|------------------------|---|--------------------------|
| TX Series Crimp Fittings | 01 | NPT - Male | 02 | NPT - Female | 06 | JIC 37° Flare - Female | AY | Type "M" Swivel - Female |
| |  B-54 | |  B-54 | |  B-55 | |  B-55 | |
| | YH | Waterblast Nozzle - Male |  B-55 | | | | | |

101TX- NPT Male


Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Wrench Flats | | Maximum Working Pressure | |
|--------------|--------------|------|------|------|-------------|------------------|------|--------------------|------|----------------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| | | | | | | | | | | | | | |
| 101TX-2-02W | 3 | -02 | 1/8 | 3.2 | 1/8"-27 | 1.73 | 44 | 0.87 | 22 | 0.38 | 10 | 15,000 | 103 |
| 101TX-1-025W | 4 | -025 | 5/32 | 4.0 | 1/16"-27 | 1.85 | 47 | 0.99 | 25 | 0.38 | 10 | 15,000 | 103 |
| 101TX-2-025 | 4 | -025 | 5/32 | 4.0 | 1/8" - 27 | 1.93 | 49 | 1.06 | 27 | 0.38 | 10 | 15,000 | 103 |
| 101TX-4-025W | 4 | -025 | 5/32 | 4.0 | 1/4"-18 | 2.20 | 56 | 1.34 | 34 | 0.50 | 13 | 15,000 | 103 |
| 101TX-1-03 | 5 | -03 | 3/16 | 4.8 | 1/16" - 27 | 2.13 | 54 | 1.06 | 27 | 0.38 | 10 | 15,000 | 103 |
| 101TX-2-03 | 5 | -03 | 3/16 | 4.8 | 1/8" - 27 | 2.13 | 54 | 1.06 | 27 | 0.38 | 10 | 15,000 | 103 |
| 101TX-4-03 | 5 | -03 | 3/16 | 4.8 | 1/4" - 18 | 2.40 | 61 | 1.35 | 34 | 0.53 | 13 | 15,000 | 103 |

102TX- NPT Female

Material: Nipple - Carbon steel, zinc-plated
Shell - Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Wrench Flats | | Maximum Working Pressure | |
|-------------|--------------|------|------|------|-------------|------------------|------|--------------------|------|----------------|------|--------------------------|-----|
| | # | DN | Size | inch | | mm | inch | mm | inch | mm | inch | mm | psi |
| 102TX-1-025 | 4 | -025 | 5/32 | 4.0 | 1/16" - 27 | 1.77 | 45 | 0.95 | 24 | 0.47 | 12 | 15,000 | 103 |
| 102TX-2-03 | 5 | -03 | 3/16 | 4.8 | 1/8" - 27 | 2.13 | 54 | 1.06 | 27 | 0.56 | 14 | 15,000 | 103 |

For detailed ordering information, please consult price list or contact Parflex Division.

TX Series Fittings

106TX- JIC 37° Female Flare


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure | |
|--------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|--------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⬡ | | ↻ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 106TX-4-02W | 3 | -02 | 1/8 | 3.2 | 9/16" - 18 | 1.57 | 40 | 0.83 | 21 | 0.68 | 17 | 10,000 | 69 |
| 106TX-4-025W | 4 | -025 | 5/32 | 4.0 | 9/16" - 18 | 1.73 | 44 | 0.83 | 21 | 0.68 | 17 | 10,000 | 69 |
| 106TX-6-03W | 5 | -03 | 3/16 | 4.8 | 9/16" - 18 | 1.89 | 48 | 0.99 | 25 | 0.75 | 19 | 10,000 | 69 |

1AYTX- Type "M" Swivel - Female

Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated
 Nut - Carbon steel, zinc-plated




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure* | |
|--------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|-------|----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⬡ | | ↻ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1AYTX-6-02W | 3 | -02 | 1/8 | 3.2 | 9/16"-18 | 1.85 | 47 | 1.10 | 28 | 0.75 | 19 | -- | -- |
| 1AYTX-6-025W | 4 | -025 | 5/32 | 4.0 | 9/16"-18 | 1.77 | 45 | 0.91 | 23 | 0.75 | 19 | -- | -- |
| 1AYTX-6-03W | 5 | -03 | 3/16 | 4.8 | 9/16"-18 | 1.97 | 50 | 0.91 | 23 | 0.75 | 19 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1YHTX- Waterblast Nozzle - Male


Material: Nipple - Carbon steel, zinc-plated
 Shell - Carbon steel, zinc-plated



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Wrench Flats | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|------------------|----|--------------------|----|----------------|----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⬡ | | ↻ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1YHTX-4-025 | 4 | -025 | 5/32 | 4.0 | 1/4" - 28 | 1.85 | 47 | 0.99 | 25 | 0.31 | 8 | -- | -- |
| 1YHTX-6-03 | 5 | -03 | 3/16 | 4.8 | 3/8" - 24 | 2.13 | 54 | 1.06 | 27 | 0.44 | 11 | -- | -- |


*Fitting is rated to the full working pressure of the hose

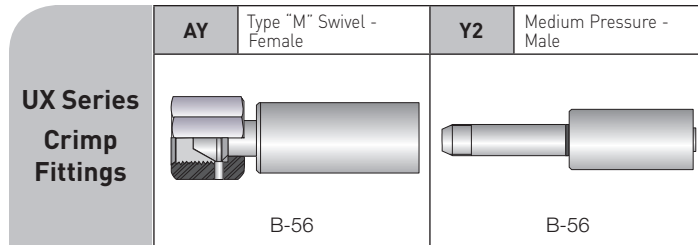


UX Series Fittings



1AYUX- Type "M" Swivel - Female

Material: Nipple - Stainless steel
Shell - Stainless steel







| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure* | |
|-------------|--------------|------|------|-----|-------------|---|-----|--------------------|----|-------|---|---------------------------|---|
| | # | ⊙ | | | |  | | | | |  | |  |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1AYUX-6-04C | 6 | -04 | 1/4 | 6.4 | 9/16"-18 | 3.66 | 93 | 1.38 | 35 | 0.75 | 19 | -- | -- |
| 1AYUX-8-06C | 10 | -06 | 3/8 | 9.5 | 3/4"-16 | 3.94 | 100 | 1.39 | 35 | 1.06 | 27 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1Y2UX- Medium Pressure - Male


Material: Nipple - Stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|-------------|--------------|------|------|-----|---------------|---|-----|--------------------|----|------------|---|--------------------------|---|
| | # | ⊙ | | | |  | | | | |  | |  |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 1Y2UX-6-04C | 6 | -04 | 1/4 | 6.4 | 3/8" - 24 LH | 4.29 | 109 | 2.20 | 56 | 0.71 | 18 | 20,000 | 138 |
| 1Y2UX-9-06C | 10 | -06 | 3/8 | 9.5 | 9/16" - 18 LH | 4.84 | 123 | 2.24 | 57 | 1.10 | 28 | 20,000 | 138 |


For detailed ordering information, please consult price list or contact Parflex Division.

WX/WX-55 Series Fittings

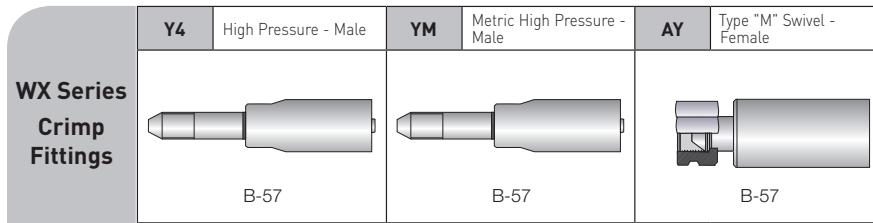

6Y4WX- High Pressure - Male

Material: Nipple - Stainless steel
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|-------------|------------------|-----|--------------------|----|------------|----|---------------------------|-----|
| | # | ⊙ | | | | ⌀ | | | | | ∅ | | ⌚ |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6Y4WX-16-8C | 25 | -16 | 1 | 25.4 | 1" - 14 LH | 5.4 | 138 | 3.2 | 80 | 1.34 | 34 | -- | -- |

*Fitting is rated to the full working pressure of the hose

6AYWX-x-55 - High Pressure - Male


Material: Nipple - Stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | H Hex | | Maximum Working Pressure* | |
|----------------|--------------|------|------|-----|-------------|------------------|-----|--------------------|----|-------|----|---------------------------|-------|
| | # | ⊙ | | | | ⌀ | | | | | ⬡ | | ⌚ |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6AYWX-10-5C-55 | 8 | -05 | 5/16 | 7.9 | 7/8" - 14 | 4.43 | 113 | 1.77 | 45 | 1.25 | 32 | 55,000 | 379.3 |

6Y4WX-x-55 - High Pressure - Male


Material: Nipple - Stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|---------------|--------------|------|------|-----|---------------|------------------|-----|--------------------|----|------------|----|---------------------------|-------|
| | # | ⊙ | | | | ⌀ | | | | | ∅ | | ⌚ |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6Y4WX-9-5C-55 | 8 | -05 | 5/16 | 7.9 | 9/16" - 18 LH | 5.13 | 130 | 2.47 | 63 | 1.10 | 28 | 55,000 | 379.3 |





6YMWX-x-55 - High Pressure Male Metric

Material: Nipple - Stainless steel
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure* | |
|---------------|--------------|------|------|-----|-------------|------------------|-----|--------------------|----|------------|----|---------------------------|-------|
| | # | ⊙ | | | | ⌀ | | | | | ∅ | | ⌚ |
| | DN | Size | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6YMWX-6-5C-55 | 8 | -05 | 5/16 | 7.9 | M14×1.5-LH | 4.72 | 120 | 2.20 | 56 | .985 | 25 | 55,000 | 379.3 |

Black Eagle Fittings
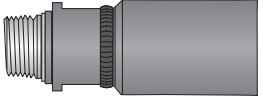
| | | | | |
|----------------------------|---|---|--|---|
| Black Eagle Crimp Fittings | 01 NPT Male | HB Hub Flange | HE 2" Hammer Union (Female) Cone Threaded | HN 2" Hammer Union (Male) Cone w/ Wing Nut |
| |  B-58 |  B-58 |  B-59 |  B-61 |

6015X- NPT Male


Material: Nipple - Carbon steel, zinc-plated
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | R Diameter | | Maximum Working Pressure | |
|----------------|--------------|-----|-------|------|-----------------|------------------|-----|--------------------|-----|------------|----|--------------------------|-----|
| | # | ⊙ | ⌀ | ⌀ | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6015X-32-24-TC | 40 | -24 | 1-1/2 | 38.1 | 2" - 11 1/2 NPT | 9.09 | 231 | 4.21 | 107 | 3.35 | 85 | 5,000 | 34 |
| 6015X-32-32-TC | 50 | -32 | 2 | 50.8 | 2" - 11 1/2 NPT | 9.61 | 244 | 4.22 | 107 | 3.25 | 83 | 5,000 | 34 |

6HB5X- Hub Flange

Material: Nipple - High strength stainless steel
Shell - Stainless steel



| Part Number | Nominal I.D. | | | | API Size | A Overall Length | | B Cutoff Allowance | | Seal | | Maximum Working Pressure* | |
|-------------------------|--------------|-----|------|------|--------------------|------------------|-----|--------------------|-----|------|-------|---------------------------|-----|
| | # | ⊙ | inch | mm | | inch | mm | inch | mm | inch | mm | psi | MPa |
| 6HB5X-32-32-TC | 50 | -32 | 2 | 50.8 | 2-1/16" 5,000 PSI | 10.18 | 259 | 4.68 | 119 | -- | BX152 | 5000 | 34 |
| 6HB5X-32-32C-TC-10K | 50 | -32 | 2 | 50.8 | 2-1/16" 10,000 PSI | 10.70 | 272 | 5.30 | 135 | -- | BX152 | -- | -- |
| 6HB5X-32-32-TC-FLG | 50 | -32 | 2 | 50.8 | 2-1/16" 5,000 PSI | 10.18 | 259 | 4.68 | 119 | 8.50 | BX152 | 5000 | 34 |
| 6HB5X-32-32C-TC-FLG-10K | 50 | -32 | 2 | 50.8 | 2-1/16" 10,000 PSI | 10.70 | 272 | 5.30 | 135 | 7.88 | BX152 | -- | -- |
| 6HB5X-41-32-TC | 50 | -32 | 2 | 50.8 | 2-9/16" 5,000 PSI | 10.18 | 259 | 4.68 | 119 | -- | BX153 | 5000 | 34 |
| 6HB5X-41-32-TC-FLG | 50 | -32 | 2 | 50.8 | 2-9/16" 5,000 PSI | 10.18 | 259 | 4.68 | 119 | 9.62 | BX153 | 5000 | 34 |

*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd




B-58

Black Eagle Fittings

6HE5X- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - Carbon steel, zinc-plated
 Shell - Stainless steel
 Nut - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|--------------------|--------------|------|-------|------|-----------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ↗ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| 6HE5X-32-24-FLATTC | 40 | -24 | 1-1/2 | 38.1 | 4-1/8" - 3 ACME | 9.13 | 232 | 4.25 | 108 | -- | -- |
| 6HE5X-32-32-FLATTC | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 11.50 | 292 | 6.10 | 155 | -- | -- |
| 6HE5X-32-32-SEGTC | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 11.73 | 298 | 6.34 | 161 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HE5X- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
 COSK - High strength stainless steel
 Shell - High strength stainless steel
 Nut - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-------------------------|--------------|------|------|------|-----------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ↗ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| 1HE5X-32-24COSK-FLAT | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 8.37 | 213 | 4.64 | 118 | -- | -- |
| 1HE5X-32-24C4462-KOP2 | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 9.13 | 232 | 4.25 | 108 | -- | -- |
| 1HE5X-32-24C4462-FLATTC | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 9.13 | 232 | 4.25 | 108 | -- | -- |
| 1HE5X-48-48 | 78 | -48 | 3 | 76.0 | 4-1/8" - 3 ACME | 15.55 | 395 | 7.24 | 184 | -- | -- |
| 1HE5X-48-48-FLAT | 78 | -48 | 3 | 76.0 | 4-1/8" - 3 ACME | 15.55 | 395 | 7.22 | 183 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HECX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
 Shell - High strength stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|------------------|--------------|------|------|------|-----------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ↗ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| 1HECX-32-32-FLAT | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 11.74 | 298 | 5.21 | 132 | -- | -- |

*Fitting is rated to the full working pressure of the hose

Black Eagle Fittings

1HELX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
 Shell - High strength stainless steel
 Nut - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|------------------|--------------|------|------|------|---------------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HELX-48-48 | 78 | -48 | 3 | 76.0 | 5-3/8" - 3 1/2 ACME | 15.55 | 395 | 7.52 | 191 | -- | -- |
| 1HELX-48-48-FLAT | 78 | -48 | 3 | 76.0 | 5-3/8" - 3 1/2 ACME | 15.55 | 395 | 7.24 | 184 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HES6- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
 Shell - High strength stainless steel
 Nut - Carbon steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|---------------------|--------------|------|------|------|-----------------|------------------|-----|--------------------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HES6-32-32-FLAT | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 6.69 | 170 | 2.99 | 76 | -- | -- |
| 1HES6-32-32-FLAT-SC | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 6.69 | 170 | 2.99 | 76 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HETX- Hammer Union (Male) Cone w/ Wing Nut

Material: Nipple - High strength steel
 Shell - High strength stainless steel
 Nut - Carbon steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|------------------|--------------|------|------|------|---------------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HETX-48-48 | 78 | -48 | 3 | 76.0 | 5-3/8" - 3 1/2 ACME | 13.39 | 340 | 6.85 | 174 | -- | -- |
| 1HETX-48-48-FLAT | 78 | -48 | 3 | 76.0 | 5-3/8" - 3 1/2 ACME | 13.39 | 340 | 6.85 | 174 | -- | -- |


*Fitting is rated to the full working pressure of the hose

For detailed ordering information, please consult price list or contact Parflex Division.

Black Eagle Fittings

6HN5X- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - Stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|----------------|--------------|------|-------|------|-----------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⚡ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| 6HN5X-32-24-TC | 40 | -24 | 1-1/2 | 38.1 | 4 1/8" - 3 ACME | 10.71 | 272 | 5.79 | 147 | -- | -- |
| 6HN5X-32-32-TC | 50 | -32 | 2 | 50.8 | 4 1/8" - 3 ACME | 9.56 | 243 | 4.18 | 106 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HN5X- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-----------------------|--------------|------|-------|------|---------------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⚡ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| 1HN5X-32-24C4462-KOP2 | 40 | -24 | 1-1/2 | 38.1 | 4 1/8" - 3 ACME | 9.65 | 245 | 4.25 | 108 | -- | -- |
| 1HN5X-32-24C4462-TC | 40 | -24 | 1-1/2 | 38.1 | 4 1/8" - 3 ACME | 9.65 | 245 | 4.25 | 108 | -- | -- |
| 1HN5X-48-48 | 78 | -48 | 3 | 76.0 | 5 3/8" - 3 1/2 ACME | 15.95 | 405 | 7.64 | 194 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HNLX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|---------------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | # | ⊙ | | | | ⋈ | | | | ⚡ | |
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| 1HNLX-48-48 | 78 | -48 | 3 | 76.0 | 5 3/8" - 3 1/2 ACME | 15.95 | 405 | 7.64 | 194 | -- | -- |

*Fitting is rated to the full working pressure of the hose

Black Eagle Fittings

1HNS6- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|----------------|--------------|------|------|------|-----------------|------------------|-----|--------------------|----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HNS6-32-32 | 50 | -32 | 2 | 50.8 | 4 1/8" - 3 ACME | 6.69 | 170 | 2.99 | 76 | -- | -- |
| 1HNS6-32-32-SC | 50 | -32 | 2 | 50.8 | 4 1/8" - 3 ACME | 6.69 | 170 | 2.99 | 76 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HNTX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel




| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|---------------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HNTX-48-48 | 78 | -48 | 3 | 76.0 | 5-3/8" - 3 1/2 ACME | 13.78 | 350 | 7.24 | 184 | -- | -- |

*Fitting is rated to the full working pressure of the hose

1HNCX- Hammer Union (Female) Cone Threaded End w/ Seal

Material: Nipple - High strength steel
Shell - High strength stainless steel



| Part Number | Nominal I.D. | | | | Thread Size | A Overall Length | | B Cutoff Allowance | | Maximum Working Pressure* | |
|-------------|--------------|------|------|------|-----------------|------------------|-----|--------------------|-----|---------------------------|-----|
| | DN | Size | inch | mm | | inch | mm | inch | mm | psi | MPa |
| # | ⊙ | | | | ⋈ | | | | | ↗ | |
| 1HNCX-32-32 | 50 | -32 | 2 | 50.8 | 4-1/8" - 3 ACME | 11.2 | 284 | 4.65 | 118 | -- | -- |

*Fitting is rated to the full working pressure of the hose

Polyflex-Lok



Polyflex-Lok

| Ref | Part Number | Description |
|-----|----------------|---|
| 1 | 1TM2X-8-03-HPK | Fitting for DN 5 hoses including caps |
| | 1TM2X-8-05-HPK | Fitting for DN 8 hoses including caps |
| | 1TMKY-8-05-HPK | Fitting for DN 8 hoses including caps |
| | 1TMBL-9-08-HPK | Fitting for DN 12 hoses including caps |
| | 1TMBS-9-08-HPK | Fitting for DN 12 hoses including caps |
| Ref | Part Number | Description |
| 2 | TFTF-8-8 | Hose connector bushing for DN 5 and DN 8 |
| | TFTF-8-9 | Hose connector bushing - connection DN 5 or DN 8 to DN 12 |
| | TFTF-9-9 | Hose connector bushing for DN 12 |
| 3 | HPK-HS-8 | Hose connector |
| 4 | HPK-HSP-8 | Pump/gun connector |
| Ref | Part Number | Description |
| 5 | YTTF-6-8 | Adapter M20 x 1.5 to DN 5 or DN 8 |
| | YTTF-9-8 | Adapter M26 x 1.5 to DN 5 or DN 8 |
| | YTTF-9-9 | Adapter M26 x 1.5 to DN 12 |
| | YTTF-10-8 | Adapter M30 x 2 to DN 5 or DN 8 |
| | YTTF-10-9 | Adapter M30 x 2 to DN 12 |
| | YTTF-12-8 | Adapter M42 x 2 to DN 5 or DN 8 |
| | YTTF-12-9 | Adapter M42 x 2 to DN 12 |
| | Y6TF-6-8 | Adapter 3/4 - 16UNF to DN 5 or DN 8 |
| | Y6TF-9-8 | Adapter 1 1/8 - 12UNF to DN 5 or DN 8 |
| 6 | TMCAP-8 | Cap DN 5 or DN 8 |
| | TMCAP-9 | Cap DN 12 |

For detailed ordering information, please consult price list or contact Parflex Division.



Adapters & Valves

Type M Adapters

Medium Pressure Adapters

High Pressure Adapters

NPT Adapters

JIC Adapters

Medium Pressure Valves

High Pressure Valves



Table of Contents

Hose
A

Introduction

| | |
|----------------------------|-----|
| Adapter Nomenclature | C-3 |
|----------------------------|-----|

Adapters

| | |
|--|------|
| Type M | C-6 |
| YAYA | C-7 |
| YAY6 | C-7 |
| YAY5 | C-8 |
| YAD9 | C-8 |
| Plugs, Caps and Torpedos | C-9 |
| 20,000 psi – Medium Pressure | C-10 |
| 5YY5 | C-11 |
| Y5Y5 | C-12 |
| 6YY5 | C-12 |
| 5YY6 | C-13 |
| Y5Y6 | C-14 |
| Y5D9 | C-14 |
| 5Y5Y | C-15 |
| 5Y6Y | C-16 |
| L5Y | C-17 |
| T5Y | C-17 |
| X5Y | C-17 |
| Y2N | C-18 |
| Y2C | C-18 |
| Plugs | C-19 |
| Caps | C-19 |
| Nipples | C-19 |
| 30,000/60,000 psi – High Pressure | C-20 |
| 6YY6 | C-21 |
| Y6Y6 | C-21 |
| X6Y6 | C-21 |
| 6Y6Y | C-22 |
| Y6D9 | C-22 |
| L6Y | C-23 |
| T6Y | C-23 |
| X6Y | C-23 |
| Y4N | C-24 |
| Y4C | C-24 |
| Plugs | C-24 |
| Caps | C-25 |
| Locking Anti-Vibration Nut and Collar | C-25 |
| Nipples | C-25 |
| NPT | C-26 |
| K0101 | C-27 |
| K0201 | C-28 |
| K0202 | C-29 |

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F



Table of Contents

Adapters Continued

| | |
|------------------|------|
| YA02 | C-29 |
| YA01 | C-30 |
| 5Y01 | C-31 |
| 02Y5 | C-32 |
| Y501 | C-33 |
| 5Y02 | C-34 |
| 6Y02 | C-35 |
| 6Y01 | C-36 |
| Y601 | C-37 |
| 02Y6 | C-37 |
| K0203 | C-38 |
| 01D9 | C-38 |
| 02D9 | C-38 |
| KL02 | C-39 |
| KT02 | C-40 |
| KX02 | C-40 |
| Caps | C-41 |
| Plugs | C-41 |
| JIC | C-42 |
| K0303 | C-43 |
| K0306 | C-43 |
| K0606 | C-43 |
| YA03 | C-44 |
| Y503 | C-44 |
| Y603 | C-44 |
| Caps | C-45 |
| Plugs | C-45 |

Valves

| | |
|--|------|
| 20,000 psi – Medium Pressure | C-46 |
| SV5Y | C-47 |
| AV5Y | C-47 |
| TV25Y | C-47 |
| TV15Y | C-48 |
| CV5Y | C-48 |
| 30,000/60,000 psi – High Pressure | C-49 |
| SV6Y | C-49 |
| AV6Y | C-49 |
| TV26Y | C-49 |
| TV16Y | C-50 |
| CV6Y | C-50 |

For detailed ordering information, please consult price list or contact Parflex Division.



Adapter Nomenclature

Adapter Part Numbers

Most adapter part number structures will follow the below examples.

Example: YA01-11-8C

- YA**01-11-8C – **Connection Type #1** (YA = Male Type M)
- YA**01**-11-8C – **Connection Type #2** (01 = Male NPT)
- YA01-**11**-8C – **Connection Size #1** (11 = 1" - 12 thread size for the Type M connection)
- YA01-11-**8C** – **Connection Size #2** (8 = 1/2" - 14 thread size for the NPT connection)
- YA01-11-8**C** – **Material** (316 Stainless Steel)

Example: 15K0101-4-4C

- 15K**0101-4-4C – **Pressure Rating** (15K = 15,000 psi)
- 15K**01**01-4-4C – **Connection Type #1** (01 = Male NPT)
- 15K01**01**-4-4C – **Connection Type #2** (01 = Male NPT)
- 15K0101-**4**-4C – **Connection Size #1** (4 = 1/4" -18)
- 15K0101-4-**4C** – **Connection Size #2** (4 = 1/4" -18)
- 15K0101-4-4**C** – **Material** (316 Stainless Steel)

| Connection Type Designations - The choice of connection type may limit the working pressure of the adapter (i.e., a High Pressure to Type M adapter will be limited to Type M pressures). | | | |
|---|---|-----------|--------------------------------|
| YA | Male, Type M | Y4 | Male, High Pressure, Tube Type |
| AY | Female, Type M | 01 | Male NPT Pipe, Rigid, Straight |
| Y5 | Male, Medium Pressure, Rigid Straight | 02 | Female NPT Pipe |
| 5Y | Female, Medium Pressure, Rigid Straight | 03 | Male JIC |
| Y2 | Male, Medium Pressure, Torpedo Type | 06 | Female JIC |
| Y6 | Male, High Pressure, Rigid Straight | X6 | Low Angle Face Seal |
| 6Y | Female, High Pressure, Rigid Straight | D9 | Male BSP |

| Connection/Thread Size | | | | | |
|--|-----------------|-----------------|------------------|----------------------|------------------|
| NPT Connections | | JIC Connections | | Type "M" Connections | |
| 2 | 1/8" - 27 | 4 | 7/16" - 20 UNF | 6 | 9/16" - 18 UNF |
| 4 | 1/4" - 18 | 6 | 9/16" - 18 UNF | 8 | 3/4" - 16 UNF |
| 6 | 3/8" - 18 | 8 | 3/4" - 16 UNF | 10 | 7/8" - 14 UNF |
| 8 | 1/2" - 14 | 10 | 7/8" - 14 UNF | 11 | 1" - 12 UNF |
| 12 | 3/4" - 14 | 12 | 1-1/16" - 12 UNF | 16 | 1-5/16" - 12 UNF |
| 16 | 1" - 11-1/2 | 16 | 1-5/16" - 12 UNF | | |
| Medium & High Pressure Connections - measured by tube O.D. | | | | | |
| | | Medium Pressure | | High Pressure | |
| 4 | 1/4" Tube O.D. | 7/16" - 20 UNF | | 9/16" - 18 UNF | |
| 6 | 3/8" Tube O.D. | 9/16" - 18 UNF | | 3/4" - 16 UNF | |
| 9 | 9/16" Tube O.D. | 13/16" - 16 UNF | | 1-1/8" - 12 UNF | |
| 12 | 3/4" Tube O.D. | 3/4" - 14 NPS | | | |
| 16 | 1" Tube O.D. | 1-3/8" - 12 UNF | | | |



Adapter Nomenclature

Connection Accessory Part Numbers – Crosses, Elbows and Tees

Connection accessories include crosses, elbows and tees. Part numbers for these accessories will always begin with a one-letter code (X, L or T) designating the accessory type, followed by a two-digit code representing the connection type. The connection size and material make up the end of the part number.

Example: L-6Y-9C

- L-6Y-9C** – **Accessory Type** (L = Elbow)
- L-6Y-9C** – **Connection Type** (6Y = Female high pressure connection)
- L-6Y-9C** – **Connection Size** (9 = 1-1/8" - 12 UNF thread size)
- L-6Y-9C** – **Material** (316 Stainless Steel)

| Accessory Type | |
|----------------|------------------------|
| X | Code given for Crosses |
| L | Code given for Elbows |
| T | Code given for Tees |

| Connection Type | |
|-----------------|-----------------------------------|
| 02 | Female NPT Connection |
| 5Y | Female Medium Pressure connection |
| 6Y | Female High Pressure connections |

| Connection/Thread Size | | | | | |
|------------------------|-------------|--|-----------------|-----------------|-----------------|
| NPT Connections | | Medium & High Pressure Connections - measured by tube O.D. | | | |
| | | | | Medium Pressure | High Pressure |
| 2 | 1/8" - 27 | 4 | 1/4" Tube O.D. | 7/16" - 20 UNF | 9/16" - 18 UNF |
| 4 | 1/4" - 18 | 6 | 3/8" Tube O.D. | 9/16" - 18 UNF | 3/4" - 16 UNF |
| 6 | 3/8" - 18 | 9 | 9/16" Tube O.D. | 13/16" - 16 UNF | 1-1/8" - 12 UNF |
| 8 | 1/2" - 14 | 12 | 3/4" Tube O.D. | 3/4" - 14 NPS | |
| 12 | 3/4" - 14 | 16 | 1" Tube O.D. | 1-3/8" - 12 UNF | |
| 16 | 1" - 11-1/2 | | | | |

For detailed ordering information, please consult price list or contact Parflex Division.

Adapter Nomenclature

Connection Accessory Part Numbers – Gland Nuts and Collars

Gland nuts and collars are simple in their make-up. Unlike crosses, elbows and tees, the gland nut and collar part numbers begin with the connection type followed by a one-letter code identifying the part as a gland nut or collar. The connection size and material codes make up the end of the part number.

Example: Y4N-6C

Y4N-6C – **Connection Type** (Y4 = High Pressure)

Y4**N**-6C – **Accessory Type** (N = Gland Nut)

Y4N-**6C** – **Connection Size** (6 = 3/8")

Y4N-6**C** – **Material** (316 Stainless Steel)

| Connection Type | |
|-----------------|----------------------------|
| Y2 | Medium Pressure Connection |
| Y4 | High Pressure Connection |

| Accessory Type | |
|----------------|------------|
| N | Gland Nuts |
| C | Collars |

| Connection/Thread Size | | | |
|------------------------|-----------------|-----------------|-----------------|
| 4 | 1/4" Tube O.D. | 7/16" - 20 UNF | 9/16" - 18 UNF |
| 6 | 3/8" Tube O.D. | 9/16" - 18 UNF | 3/4" - 16 UNF |
| 9 | 9/16" Tube O.D. | 13/16" - 16 UNF | 1-1/8" - 12 UNF |
| 12 | 3/4" Tube O.D. | 3/4" - 14 NPS | |
| 16 | 1" Tube O.D. | 1-3/8" - 12 UNF | |

Connection Accessory Part Numbers – Threaded Tube Nipples

Example: Y406-0800C

Y406-0800C – **Connection Type** (Y4 = High Pressure)

Y4**06**-0800C – **Tube Size** (06 = 3/8")

Y406-**0800C** – **Tube Length** (6 = 3/8")

Y406-0800**C** – **Material** (316 Stainless Steel)

| Connection Type | |
|-----------------|----------------------------|
| Y2 | Medium Pressure Connection |
| Y4 | High Pressure Connection |

| Tube Size | |
|-----------|-------|
| 04 | 1/4" |
| 06 | 3/8" |
| 09 | 9/16" |

| Tube Length | |
|---|---------------|
| 0300 | 3" in length |
| 0400 | 4" in length |
| 0600 | 6" in length |
| 0800 | 8" in length |
| 1000 | 10" in length |
| Length = distance between tips of each cone | |

Type “M” Swivel Hose Fitting and Adapters



The Type “M” Swivel End Fitting is a swivel nut fitting with a 58° male cone nipple. Each Type “M” Swivel End Fitting is **rated for the full working pressure of the hose**.

Advantages:


- Rated for the full working pressure of the hose
- Provides a swivel for quick and easy connection
- Internal threads and seal are protected from external damage
- Non-rotating seal reduces galling and minimizes tightening torque
- Can be adapted to almost any connection required

Thread Sizes:

- 9/16" - 18 UNF
- 3/4" - 16 UNF
- 7/8" - 14 UNF
- 1" - 12 UNF
- 1-5/16" - 12 UNF


Type "M" Swivel Hose Fitting Adapters

YAYA — Male Type "M" x Male Type "M"



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| YAYA-6-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.38 | 35.05 | 0.63 | 16.00 | 60,000 | 414 |
| YAYA-8-6C | 3/4" - 16 UNF | 9/16" - 18 UNF | 1.63 | 41.40 | 0.75 | 19.05 | 30,000 | 207 |
| YAYA-8-8C | 3/4" - 16 UNF | 3/4" - 16 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 30,000 | 207 |
| YAYA-10-6C | 7/8" - 14 UNF | 9/16" - 18 UNF | 1.88 | 47.75 | 1.00 | 25.40 | 60,000 | 414 |
| YAYA-10-10C | 7/8" - 14 UNF | 7/8" - 14 UNF | 2.00 | 50.80 | 1.00 | 25.40 | 60,000 | 414 |
| YAYA-11-8C | 1" - 12 UNF | 3/4" - 16 UNF | 1.88 | 47.75 | 1.00 | 25.40 | 30,000 | 207 |
| YAYA-11-10C | 1" - 12 UNF | 7/8" 14 UNF | 1.98 | 50.29 | 1.00 | 25.40 | 30,000 | 207 |
| YAYA-11-11C | 1" - 12 UNF | 1" - 12 UNF | 1.88 | 47.75 | 1.00 | 25.40 | 30,000 | 207 |
| YAYA-16-11C | 1-5/16" - 12 UNF | 1-5/16" - 12 UNF | 2.13 | 54.10 | 1.38 | 35.05 | 20,000 | 138 |
| YAYA-16-16C | 1-5/16" - 12 UNF | 1-5/16" - 12 UNF | 2.13 | 54.10 | 1.38 | 35.05 | 20,000 | 138 |


YAY6 — Male Type "M" x Male High Pressure



| Part Number | T1 Thread Size | T2 Thread Size | Nominal Tube Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|-----------------|-------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | |
| YAY6-6-4C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1/4" H.P. | 1.53 | 38.86 | 0.63 | 16.00 | 60,000 | 414 |
| YAY6-6-6C | 9/16" - 18 UNF | 3/4" - 16 UNF | 3/8" H.P. | 1.75 | 44.45 | 0.75 | 19.05 | 60,000 | 414 |
| YAY6-6-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 9/16" H.P. | 2.00 | 50.80 | 1.13 | 28.70 | 60,000 | 414 |
| YAY6-8-6C | 3/4" - 16 UNF | 3/4" - 16 UNF | 3/8" H.P. | 2.00 | 50.80 | 0.75 | 19.05 | 30,000 | 207 |
| YAY6-8-9C | 3/4" - 16 UNF | 1-1/8" - 12 UNF | 9/16" H.P. | 2.25 | 57.15 | 1.13 | 28.70 | 30,000 | 207 |
| YAY6-10-6C | 7/8" - 14 UNF | 3/4" - 16 UNF | 3/8" H.P. | 2.25 | 57.15 | 1.00 | 25.40 | 60,000 | 414 |
| YAY6-10-9C | 7/8" - 14 UNF | 1-1/8" - 12 UNF | 9/16" H.P. | 2.38 | 60.45 | 1.13 | 28.70 | 60,000 | 414 |
| YAY6-11-9C | 1" - 12 UNF | 1-1/8" - 12 UNF | 9/16" H.P. | 2.25 | 57.15 | 1.13 | 28.70 | 30,000 | 207 |


Type "M" Swivel Hose Fitting Adapters

YAY5 — Male T type "M" x Male Medium Pressure



| Part Number | T1 Thread Size | T2 Thread Size | Nominal Tube Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|-----------------|-------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | |
| YAY5-6-4C | 9/16" - 18 UNF | 7/16" - 20 UNF | 1/4" M.P. | 1.56 | 39.62 | 0.63 | 16.00 | 20,000 | 138 |
| YAY5-6-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 3/8" M.P. | 1.63 | 41.40 | 0.63 | 16.00 | 20,000 | 138 |
| YAY5-6-9C | 9/16" - 18 UNF | 13/16" - 16 UNF | 9/16" M.P. | 2.00 | 50.80 | 0.88 | 22.35 | 20,000 | 138 |
| YAY5-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPS | 3/4" M.P. | 2.32 | 58.93 | 1.13 | 28.70 | 20,000 | 138 |
| YAY5-8-4C | 3/4" - 16 UNF | 7/16" - 20 UNF | 1/4" M.P. | 1.68 | 42.67 | 0.75 | 19.05 | 20,000 | 138 |
| YAY5-8-6C | 3/4" - 16 UNF | 9/16" - 18 UNF | 3/8" M.P. | 1.88 | 47.75 | 0.75 | 19.05 | 20,000 | 138 |
| YAY5-8-9C | 3/4" - 16 UNF | 13/16" - 16 UNF | 9/16" M.P. | 2.20 | 55.88 | 0.88 | 22.35 | 20,000 | 138 |
| YAY5-8-12C | 3/4" - 16 UNF | 3/4" - 14 NPS | 3/4" M.P. | 2.44 | 61.98 | 1.13 | 28.70 | 20,000 | 138 |
| YAY5-11-4C | 1" - 12 UNF | 7/16" - 20 UNF | 1/4" M.P. | 1.94 | 49.28 | 1.00 | 25.40 | 20,000 | 138 |
| YAY5-11-6C | 1" - 12 UNF | 9/16" - 18 UNF | 3/8" M.P. | 2.00 | 50.80 | 1.00 | 25.40 | 20,000 | 138 |
| YAY5-11-9C | 1" - 12 UNF | 13/16" - 16 UNF | 9/16" M.P. | 2.25 | 57.15 | 1.00 | 25.40 | 20,000 | 138 |
| YAY5-11-12C | 1" - 12 UNF | 3/4" - 14 NPS | 3/4" M.P. | 2.44 | 61.98 | 1.13 | 28.70 | 20,000 | 138 |
| YAY5-16-9C | 1-5/16" - 12 UNF | 9/16" - 18 UNF | 9/16" M.P. | 2.50 | 63.50 | 1.38 | 35.05 | 20,000 | 138 |
| YAY5-16-12C | 1-5/16" - 12 UNF | 13/16" - 16 UNF | 3/4" M.P. | 2.70 | 68.58 | 1.38 | 35.05 | 20,000 | 138 |

YAD9 — Male Type "M" x Male BSP




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| YAD9-6-4C | 9/16" - 18 UNF | G 1/4" - 19 | 1.36 | 34.54 | 0.75 | 19.05 | 30,000 | 207 |
| YAD9-6-6C* | 9/16" - 18 UNF | G 3/8" - 19 | 1.36 | 34.54 | 0.875 | 22.23 | 30,000 | 207 |
| YAD9-6-8C* | 9/16" - 18 UNF | G 1/2" - 14 | 1.54 | 39.12 | 1.00 | 25.40 | 30,000 | 207 |

*Non-standard part - may require longer lead time


Type "M" Swivel Hose Fitting Adapters

Plugs




| Part Number | T1 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| YA6C-PLUG | 9/16" - 18 UNF | 2.07 | 52.58 | 0.75 | 19.05 | 60,000 | 414 |
| YA8C-PLUG | 3/4" - 16 UNF | 2.13 | 54.10 | 1.00 | 25.40 | 30,000 | 207 |
| YA11C-PLUG | 1" - 12 UNF | 1.25 | 31.75 | 1.00 | 25.40 | 30,000 | 207 |
| YA16C-PLUG | 1-5/16" - 12 UNF | 2.63 | 66.80 | 1.38 | 35.05 | 20,000 | 138 |

Caps



| Part Number | T1 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| AY6C-CAP | 9/16" - 18 UNF | 0.85 | 21.59 | 0.69 | 17.53 | 60,000 | 414 |
| AY8C-CAP | 3/4" - 16 UNF | 0.91 | 23.11 | 1.00 | 25.40 | 30,000 | 207 |
| AY11C-CAP | 1" - 12 UNF | 1.31 | 33.27 | 1.25 | 31.75 | 30,000 | 207 |
| AY16C-CAP | 1-5/16" - 12 UNF | 1.20 | 30.48 | 1.50 | 38.10 | 20,000 | 138 |

Torpedos



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| YAY1-8-16C | 3/4" - 16 UNF | 1" - 14 LH | 3.56 | 90.42 | 1.13 | 28.70 | 20,000 | 138 |
| YAY2-8-16C | 3/4" - 16 UNF | 1" - 14 LH | 3.56 | 90.42 | 1.38 | 35.05 | 20,000 | 138 |
| YAY1-11-16C | 1" - 12 UNF | 1" - 14 LH | 3.56 | 90.42 | 1.13 | 28.70 | 20,000 | 138 |
| YAY2-11-16C | 1" - 12 UNF | 1" - 14 LH | 3.56 | 90.42 | 1.38 | 35.05 | 20,000 | 138 |
| YAY1-16-16C | 1-5/16" - 12 UNF | 1" - 14 LH | 3.70 | 93.98 | 1.38 | 35.05 | 20,000 | 138 |
| YAY2-16-16C | 1-5/16" - 12 UNF | 1" - 14 LH | 3.70 | 93.98 | 1.38 | 35.05 | 20,000 | 138 |

Medium Pressure Adapters



Medium Pressure is a 58/60 degree coned and threaded tubing design. They have a **maximum working pressure rating of 20,000 psi.**

Advantages:

- An industry standard for use at elevated pressures
- Large orifice allows maximum flow of liquids and gases
- Suitable for repetitive assembly and disassembly

Thread Sizes (determined by tubing O.D.):


- 1/4" O.D. x 0.109" I.D. — 7/16" - 20 male thread on gland nut
- 3/8" O.D. x 0.19" I.D. — 9/16" - 18 male thread on gland nut
- 9/16" O.D. x 0.31" I.D. — 13/16" - 16 male thread on gland nut
- 3/4" O.D. x 0.44" I.D. — 3/4" - National Pipe Straight male on gland nut
- 1" O.D. x 0.56" I.D. — 1-3/8" - 12 male thread on gland nut

For detailed ordering information, please consult price list or contact Parflex Division.



Medium Pressure Adapters

5YY5 — Female Medium Pressure x Male Medium Pressure




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5YY5-4-6C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5YY5-4-9C | 7/16" - 20 UNF | 13/16" - 16 UNF | 1.87 | 47.50 | 0.87 | 22.10 | 20,000 | 138 |
| 5YY5-4-12C | 7/16" - 20 UNF | 3/4" - 14 NPS | 2.00 | 50.80 | 1.12 | 28.45 | 20,000 | 138 |
| 5YY5-4-16C | 7/16" - 20 UNF | 1-3/8" - 12 UNF | 3.00 | 76.20 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY5-6-4C | 9/16" - 18 UNF | 7/16" - 20 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5YY5-6-9C | 9/16" - 18 UNF | 13/16" - 16 UNF | 1.87 | 47.50 | 0.87 | 22.10 | 20,000 | 138 |
| 5YY5-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPS | 2.00 | 50.80 | 1.12 | 28.45 | 20,000 | 138 |
| 5YY5-6-16C* | 9/16" - 18 UNF | 1-3/8" - 12 UNF | 3.12 | 79.25 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY5-9-4C | 13/16" - 16 UNF | 7/16" - 20 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY5-9-6C | 13/16" - 16 UNF | 9/16" - 18 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY5-9-12C | 13/16" - 16 UNF | 9/16" - 18 UNF | 2.50 | 63.50 | 1.12 | 28.45 | 20,000 | 138 |
| 5YY5-9-16C | 13/16" - 16 UNF | 1-3/8" - 12 UNF | 3.37 | 85.60 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY5-12-4C* | 3/4" - 14 NPS | 7/16" - 20 UNF | 1.25 | 31.75 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY5-12-6C | 3/4" - 14 NPS | 9/16" - 18 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY5-12-9C | 3/4" - 14 NPS | 13/16" - 16 UNF | 2.87 | 72.90 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY5-12-16C | 3/4" - 14 NPS | 1-3/8" - 12 UNF | 3.75 | 95.25 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY5-16-4C | 1-3/8" - 12 UNF | 7/16" - 20 UNF | 2.75 | 69.85 | 1.75 | 44.45 | 20,000 | 138 |
| 5YY5-16-6C | 1-3/8" - 12 UNF | 9/16" - 18 UNF | 2.87 | 72.90 | 1.75 | 44.45 | 20,000 | 138 |
| 5YY5-16-9C | 1-3/8" - 12 UNF | 13/16" - 16 UNF | 3.00 | 76.20 | 1.75 | 44.45 | 20,000 | 138 |
| 5YY5-16-12C | 1-3/8" - 12 UNF | 3/4" - 14 NPS | 3.25 | 82.55 | 1.75 | 44.45 | 20,000 | 138 |

*Non-standard part - may require longer lead time


Medium Pressure Adapters

Y5Y5 — Male Medium Pressure x Male Medium Pressure



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|--------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y5Y5-4-4C | 7/16" - 20 UNF | 7/16" - 20 UNF | 2.00 | 50.80 | 0.62 | 15.75 | 20,000 | 138 |
| Y5Y5-4-6C | 7/16" - 20 UNF | 9/16" - 18 UNF | 2.12 | 53.85 | 0.75 | 19.05 | 20,000 | 138 |
| Y5Y5-4-9C | 7/16" - 20 UNF | 13/16" - 16 UNF | 2.18 | 55.37 | 0.875 | 22.23 | 20,000 | 138 |
| Y5Y5-4-12C | 7/16" - 20 UNF | 3/4" - 14 NPS | 2.50 | 63.50 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y5-4-16C | 7/16" - 20 UNF | 1-3/8" - 12 UNF | 3.62 | 91.95 | 1.00 | 25.40 | 20,000 | 138 |
| Y5Y5-6-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 2.25 | 57.15 | 0.75 | 19.05 | 20,000 | 138 |
| Y5Y5-6-9C | 9/16" - 18 UNF | 13/16" - 16 UNF | 2.50 | 63.50 | 0.87 | 22.10 | 20,000 | 138 |
| Y5Y5-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPS | 2.62 | 66.55 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y5-6-16C | 9/16" - 18 UNF | 1-3/8" - 12 UNF | 3.75 | 95.25 | 1.00 | 25.40 | 20,000 | 138 |
| Y5Y5-9-9C | 13/16" - 16 UNF | 13/16" - 16 UNF | 2.50 | 63.50 | 1.00 | 25.40 | 20,000 | 138 |
| Y5Y5-9-12C | 13/16" - 16 UNF | 3/4" - 14 NPS | 2.87 | 72.90 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y5-9-16C | 13/16" - 16 UNF | 1-3/8" - 12 UNF | 4.00 | 101.60 | 1.00 | 25.40 | 20,000 | 138 |
| Y5Y5-12-12C | 3/4" - 14 NPS | 3/4" - 14 NPS | 3.00 | 76.20 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y5-12-16C | 3/4" - 14 NPS | 1-3/8" - 12 UNF | 1.25 | 31.75 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y5-16-16C | 1-3/8" - 12 UNF | 1-3/8" - 12 UNF | 4.25 | 107.95 | 1.375 | 34.93 | 20,000 | 138 |

6YY5 — Female High Pressure x Male Medium Pressure




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 6YY5-4-4C | 9/16" - 18 UNF | 7/16" - 20 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 6YY5-4-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 6YY5-4-9C | 9/16" - 18 UNF | 13/16" - 16 UNF | 1.87 | 47.50 | 0.87 | 22.10 | 20,000 | 138 |
| 6YY5-4-12C* | 9/16" - 18 UNF | 3/4" - 14 NPS | 2.25 | 57.15 | 1.12 | 28.45 | 20,000 | 138 |
| 6YY5-4-16C | 9/16" - 18 UNF | 1-3/8" - 12 UNF | 3.00 | 76.20 | 1.00 | 25.40 | 20,000 | 138 |
| 6YY5-6-4C | 3/4" - 16 UNF | 7/16" - 20 UNF | 1.87 | 47.50 | 1.00 | 25.40 | 20,000 | 138 |
| 6YY5-6-6C | 3/4" - 16 UNF | 9/16" - 18 UNF | 1.87 | 47.50 | 1.00 | 25.40 | 20,000 | 138 |
| 6YY5-6-9C* | 3/4" - 16 UNF | 13/16" - 16 UNF | 2.00 | 50.80 | 1.00 | 25.40 | 20,000 | 138 |
| 6YY5-6-12C | 3/4" - 16 UNF | 3/4" - 14 NPS | 2.25 | 57.15 | 1.12 | 28.45 | 20,000 | 138 |
| 6YY5-6-16C | 3/4" - 16 UNF | 1-3/8" - 12 UNF | 3.25 | 82.55 | 1.00 | 25.40 | 20,000 | 138 |
| 6YY5-9-4C | 1-1/8" - 12 UNF | 7/16" - 20 UNF | 2.12 | 53.85 | 1.37 | 34.80 | 20,000 | 138 |
| 6YY5-9-6C* | 1-1/8" - 12 UNF | 9/16" - 18 UNF | 2.12 | 53.85 | 1.37 | 34.80 | 20,000 | 138 |
| 6YY5-9-9C | 1-1/8" - 12 UNF | 13/16" - 16 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 20,000 | 138 |
| 6YY5-9-12C | 1-1/8" - 12 UNF | 3/4" - 14 NPS | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 6YY5-9-16C | 1-1/8" - 12 UNF | 1-3/8" - 12 UNF | 3.62 | 91.95 | 1.37 | 34.80 | 20,000 | 138 |

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

Medium Pressure Adapters

5YY6 — Female Medium Pressure x Male High Pressure




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5YY6-4-4C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.37 | 34.80 | 0.75 | 19.05 | 20,000 | 138 |
| 5YY6-4-6C | 7/16" - 20 UNF | 3/4" - 16 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5YY6-4-9C | 7/16" - 20 UNF | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 20,000 | 138 |
| 5YY6-6-4C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5YY6-6-6C | 9/16" - 18 UNF | 3/4" - 16 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5YY6-6-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 20,000 | 138 |
| 5YY6-9-4C | 13/16" - 16 UNF | 9/16" - 18 UNF | 1.87 | 47.50 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY6-9-6C | 13/16" - 16 UNF | 3/4" - 16 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5YY6-9-9C | 13/16" - 16 UNF | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 20,000 | 138 |
| 5YY6-12-4C | 3/4" - 14 NPS | 9/16" - 18 UNF | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY6-12-6C | 3/4" - 14 NPS | 3/4" - 16 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY6-12-9C | 3/4" - 14 NPS | 1-1/8" - 12 UNF | 2.62 | 66.55 | 1.37 | 34.80 | 20,000 | 138 |
| 5YY6-16-4C* | 1-3/8" - 12 UNF | 9/16" - 18 UNF | 2.62 | 66.55 | 1.75 | 44.45 | 20,000 | 138 |
| 5YY6-16-6C* | 1-3/8" - 12 UNF | 3/4" - 16 UNF | 2.87 | 72.90 | 1.75 | 44.45 | 20,000 | 138 |
| 5YY6-16-9C | 1-3/8" - 12 UNF | 1-1/8" - 12 UNF | 3.12 | 79.25 | 1.75 | 44.45 | 20,000 | 138 |

*Non-standard part - may require longer lead time

Medium Pressure Adapters


Y5Y6 — Male Medium Pressure x Male High Pressure



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|--------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y5Y6-4-4C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.73 | 43.94 | 0.63 | 16.00 | 20,000 | 138 |
| Y5Y6-4-6C | 7/16" - 20 UNF | 3/4" - 16 UNF | 2.10 | 53.34 | 0.75 | 19.05 | 20,000 | 138 |
| Y5Y6-4-9C | 7/16" - 20 UNF | 1-1/8" - 12 UNF | 2.37 | 60.20 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y6-6-4C | 9/16" - 18 UNF | 9/16" - 18 UNF | 2.12 | 53.85 | 0.62 | 15.75 | 20,000 | 138 |
| Y5Y6-6-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 2.50 | 63.50 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y6-9-4C | 13/16" - 16 UNF | 9/16" - 18 UNF | 2.25 | 57.15 | 0.87 | 22.10 | 20,000 | 138 |
| Y5Y6-9-6C | 13/16" - 16 UNF | 3/4" - 16 UNF | 2.38 | 60.45 | 0.875 | 22.23 | 20,000 | 138 |
| Y5Y6-9-9C | 13/16" - 16 UNF | 1-1/8" - 12 UNF | 2.62 | 66.55 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y6-12-4C | 3/4" - 14 NPS | 9/16" - 18 UNF | 2.62 | 66.55 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y5-12-6C* | 3/4" - 14 NPS | 3/4" - 16 UNF | 2.75 | 69.85 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y6-12-9C | 3/4" - 14 NPS | 1-1/8" - 12 UNF | 3.00 | 76.20 | 1.12 | 28.45 | 20,000 | 138 |
| Y5Y6-16-4C* | 1-3/8" - 12 UNF | 9/16" - 18 UNF | 3.62 | 91.95 | 1.00 | 25.40 | 20,000 | 138 |
| Y5Y6-16-6C* | 1-3/8" - 12 UNF | 3/4" - 16 UNF | 4.00 | 101.60 | 1.00 | 25.40 | 20,000 | 138 |
| Y5Y6-16-9C | 1-3/8" - 12 UNF | 1-1/8" - 12 UNF | 4.00 | 101.60 | 1.12 | 28.45 | 20,000 | 138 |

*Non-standard part - may require longer lead time

Y5D9 — Male Medium Pressure x Male BSP




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y5D9-4-4C | 7/16" - 20 UNF | G1/4 - 19 | 1.47 | 37.34 | 0.75 | 19.05 | 20,000 | 138 |
| Y5D9-6-4C | 9/16" - 18 UNF | G1/4 - 19 | 1.69 | 42.93 | 0.75 | 19.05 | 20,000 | 138 |
| Y5D9-6-6C | 9/16" - 18 UNF | G3/8 - 19 | 1.66 | 42.16 | 0.875 | 22.23 | 20,000 | 138 |
| Y5D9-9-6C | 13/16" - 16 UNF | G3/8 - 19 | 1.88 | 47.75 | 0.875 | 22.23 | 20,000 | 138 |

For detailed ordering information, please consult price list or contact Parflex Division.


Medium Pressure Adapters

5Y5Y — Female Medium Pressure, Straight Coupling



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5Y5Y-4-4C | 7/16" - 20 UNF | 7/16" - 20 UNF | 1.62 | 41.15 | 0.75 | 19.05 | 20,000 | 138 |
| 5Y5Y-6-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5Y5Y-9-9C | 13/16" - 16 UNF | 13/16" - 16 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y5Y-12-12C | 3/4" - 14 NPS | 3/4" - 14 NPS | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y5Y-16-16C | 1-3/8" - 12 UNF | 1-3/8" - 12 UNF | 3.50 | 88.90 | 1.75 | 44.45 | 20,000 | 138 |

5Y5Y — Female Medium Pressure, Reducer Coupling




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5Y5Y-4-6C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5Y5Y-4-9C | 7/16" - 20 UNF | 13/16" - 16 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y5Y-4-12C* | 7/16" - 20 UNF | 3/4" - 14 NPS | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y5Y-4-16C | 7/16" - 20 UNF | 1-3/8" - 12 UNF | 3.50 | 88.90 | 1.75 | 44.45 | 20,000 | 138 |
| 5Y5Y-6-9C | 9/16" - 18 UNF | 13/16" - 16 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y5Y-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPS | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y5Y-6-16C | 9/16" - 18 UNF | 1-3/8" - 12 UNF | 3.50 | 88.90 | 1.75 | 44.45 | 20,000 | 138 |
| 5Y5Y-9-12C | 13/16" - 16 UNF | 3/4" - 14 NPS | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y5Y-9-16C | 13/16" - 16 UNF | 1-3/8" - 12 UNF | 3.50 | 88.90 | 1.75 | 44.45 | 20,000 | 138 |
| 5Y5Y-12-16C | 3/4" - 14 NPS | 1-3/8" - 12 UNF | 3.50 | 88.90 | 1.75 | 44.45 | 20,000 | 138 |

*Non-standard part - may require longer lead time

Medium Pressure Adapters

5Y6Y — Female Medium Pressure x Female High Pressure Coupling




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5Y6Y-4-4C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.62 | 41.15 | 0.75 | 19.05 | 20,000 | 138 |
| 5Y6Y-4-6C | 7/16" - 20 UNF | 3/4" - 16 UNF | 1.87 | 47.50 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y6Y-4-9C* | 7/16" - 20 UNF | 1-1/8" - 12 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-6-4C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 20,000 | 138 |
| 5Y6Y-6-6C | 9/16" - 18 UNF | 3/4" - 16 UNF | 1.87 | 47.50 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y6Y-6-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-9-4C | 13/16" - 16 UNF | 9/16" - 18 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y6Y-9-6C | 13/16" - 16 UNF | 3/4" - 16 UNF | 2.37 | 60.20 | 1.00 | 25.40 | 20,000 | 138 |
| 5Y6Y-9-9C | 13/16" - 16 UNF | 1-1/8" - 12 UNF | 1.75 | 44.45 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-12-4C | 3/4" - 14 NPS | 9/16" - 18 UNF | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-12-6C* | 3/4" - 14 NPS | 3/4" - 16 UNF | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-12-9C | 3/4" - 14 NPS | 1-1/8" - 12 UNF | 2.50 | 63.50 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-16-4C | 1-3/8" - 12 UNF | 9/16" - 18 UNF | 3.50 | 88.90 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-16-6C* | 1-3/8" - 12 UNF | 3/4" - 16 UNF | 3.50 | 88.90 | 1.37 | 34.80 | 20,000 | 138 |
| 5Y6Y-16-9C | 1-3/8" - 12 UNF | 1-1/8" - 12 UNF | 3.50 | 88.90 | 1.37 | 34.80 | 20,000 | 138 |

*Non-standard part - may require longer lead time


Medium Pressure Adapters

L5Y — Medium Pressure Elbow




| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| L5Y-4C | 7/16" - 20 UNF | 0.75 | 1.18 | 29.97 | 1.00 | 25.40 | 0.87 | 22.10 | 0.68 | 17.27 | 20,000 | 138 |
| L5Y-6C | 9/16" - 18 UNF | 0.75 | 1.37 | 34.80 | 1.37 | 34.80 | 1.00 | 25.40 | 1.00 | 25.40 | 20,000 | 138 |
| L5Y-9C | 13/16" - 16 UNF | 1.00 | 1.75 | 44.45 | 1.75 | 44.45 | 1.25 | 31.75 | 1.25 | 31.75 | 20,000 | 138 |
| L5Y-12C | 3/4" - 14 NPS | 1.37 | 2.25 | 57.15 | 2.25 | 57.15 | 1.50 | 38.10 | 1.50 | 38.10 | 20,000 | 138 |
| L5Y-16C | 1-3/8" - 12 UNF | 1.75 | 3.00 | 76.20 | 3.00 | 76.20 | 2.06 | 52.32 | 2.06 | 52.32 | 20,000 | 138 |

T5Y — Medium Pressure Tee



| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|--------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| T5Y-4C | 7/16" - 20 UNF | 0.62 | 1.75 | 44.45 | 1.00 | 25.40 | 0.87 | 22.10 | 0.68 | 17.27 | 20,000 | 138 |
| T5Y-6C | 9/16" - 18 UNF | 0.75 | 2.00 | 50.80 | 1.37 | 34.80 | 1.00 | 25.40 | 1.00 | 25.40 | 20,000 | 138 |
| T5Y-9C | 13/16" - 16 UNF | 1.00 | 2.50 | 63.50 | 1.75 | 44.45 | 1.25 | 31.75 | 1.25 | 31.75 | 20,000 | 138 |
| T5Y-12C | 3/4" - 14 NPS | 1.37 | 3.00 | 76.20 | 2.25 | 57.15 | 1.50 | 38.10 | 1.50 | 38.10 | 20,000 | 138 |
| T5Y-16C | 1-3/8" - 12 UNF | 1.75 | 4.12 | 104.65 | 3.00 | 76.20 | 2.06 | 52.32 | 2.06 | 52.32 | 20,000 | 138 |


X5Y — Medium Pressure Cross



| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|--------|------|--------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| X5Y-4C | 7/16" - 20 UNF | 0.62 | 1.75 | 44.45 | 1.37 | 34.80 | 0.87 | 22.10 | 0.68 | 17.27 | 20,000 | 138 |
| X5Y-6C | 9/16" - 18 UNF | 0.75 | 2.00 | 50.80 | 2.00 | 50.80 | 1.00 | 25.40 | 1.00 | 25.40 | 20,000 | 138 |
| X5Y-9C | 13/16" - 16 UNF | 1.00 | 2.50 | 63.50 | 2.50 | 63.50 | 1.25 | 31.75 | 1.25 | 31.75 | 20,000 | 138 |
| X5Y-12C | 3/4" - 14 NPS | 1.37 | 3.00 | 76.20 | 3.00 | 76.20 | 1.50 | 38.10 | 1.50 | 38.10 | 20,000 | 138 |
| X5Y-16C | 1-3/8" - 12 UNF | 1.75 | 4.12 | 104.65 | 4.12 | 104.65 | 2.06 | 52.32 | 2.06 | 52.32 | 20,000 | 138 |

Medium Pressure Adapters

Y2N — Medium Pressure Gland Nut



| Part Number | Thread Size | Hex Size | | Max. Working Pressure | |
|-------------|-----------------|----------|-------|-----------------------|-----|
| | | inch | mm | psi | MPa |
| # | | | | | |
| Y2N-4C | 7/16" - 20 UNF | 0.50 | 12.7 | 20,000 | 138 |
| Y2N-6C | 9/16" - 18 UNF | 0.625 | 15.88 | 20,000 | 138 |
| Y2N-9C | 13/16" - 16 UNF | 0.813 | 20.64 | 20,000 | 138 |
| Y2N-12C | 3/4" - 14 NPS | 0.75 | 19.05 | 20,000 | 138 |
| Y2N-16C | 1-3/8" - 12 UNF | 1.375 | 34.93 | 20,000 | 138 |

Y2C — Medium Pressure Collar



| Part Number | Thread Size | Max. Working Pressure | |
|-------------|-------------------|-----------------------|-----|
| | | psi | MPa |
| # | | | |
| Y2C-4C | 1/4" - 28 UNF LH | 20,000 | 138 |
| Y2C-6C | 3/8" - 24 UNF LH | 20,000 | 138 |
| Y2C-9C | 9/16" - 18 UNF LH | 20,000 | 138 |
| Y2C-12C | 3/4" - 16 UNF LH | 20,000 | 138 |
| Y2C-16C | 1" - 14 UNF LH | 20,000 | 138 |


Medium Pressure Adapters

HBPLM — Medium Pressure Plug




| Part Number | Tube Size (O.D.) | Max. Working Pressure | |
|-------------|------------------|-----------------------|-----|
| | | psi | MPa |
| # | | | |
| HBPLM4-B | 1/4" | 20,000 | 138 |
| HBPLM6-B | 3/8" | 20,000 | 138 |
| HBPLM9-B | 9/16" | 20,000 | 138 |
| HBPLM12-B | 3/4" | 20,000 | 138 |
| HBPLM16-B | 1" | 20,000 | 138 |

Medium Pressure Caps



| Part Number | Thread Size | Overall Length | | Hex | | Max. Working Pressure | |
|-------------|-----------------|----------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| 5Y4C-CAP | 7/16" - 20 UNF | 0.95 | 24.13 | 0.625 | 15.88 | 20,000 | 138 |
| 5Y6C-CAP | 9/16" - 18 UNF | 1.38 | 35.05 | 0.875 | 22.23 | 20,000 | 138 |
| 5Y9C-CAP | 13/16" - 16 UNF | 1.50 | 38.10 | 1.25 | 31.75 | 20,000 | 138 |
| 5Y12C-CAP | 3/4" - 14 NPSM | 1.85 | 46.99 | 1.375 | 34.93 | 20,000 | 138 |
| 5Y16C-CAP | 1-3/8" - 12 UNF | 2.20 | 55.88 | 1.75 | 44.45 | 20,000 | 138 |

Y204, Y206, Y209, Y212 and Y216 — Medium Pressure Nipple



| Length | 1/4" O.D. | 3/8" O.D. | 9/16" O.D. | 3/4" O.D. | 1" O.D. |
|--------|-------------|------------|-------------|-------------|-------------|
| 2.75" | Y204-0275C | | | | |
| 3" | Y204-0300C | Y206-0300C | | | |
| 4" | Y204-0400C | Y206-0400C | Y209-0400C | Y212-0400C | |
| 6" | Y204-0600C | Y206-0600C | Y209-0600C | Y212-0600C | Y216-0600C |
| 8" | Y204-0800C | Y206-0800C | Y209-0800C | Y212-0800C | Y216-0800C* |
| 10" | Y204-1000C* | Y206-1000C | Y209-1000C* | Y212-1000C* | Y216-1000C* |
| 12" | Y204-1200C | Y206-1200C | Y209-1200C* | Y212-1200C | Y216-1200C* |

*Non-standard part - may require longer lead time

High Pressure Adapters



High Pressure is a 58/60 degree coned and threaded tubing design. With small bore sizes, they have a **maximum working pressure rating of 60,000 psi.**

Advantages:

- An industry standard for use at elevated pressures
- Suitable for repetitive assembly and disassembly

Thread Sizes (determined by tubing O.D.):


- 1/4" O.D. x 0.08" I.D. — 9/16" - 18 male thread on gland nut
- 3/8" O.D. x 0.12" I.D. — 3/4" - 16 male thread on gland nut
- 9/16" O.D. x 0.18" I.D. — 1-1/8" - 12 male thread on gland nut

For detailed ordering information, please consult price list or contact Parflex Division.




High Pressure Adapters

6YY6 — Female High Pressure x Male High Pressure




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 6YY6-4-6C | 9/16" - 18 UNF | 3/4" - 16 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 60,000 | 414 |
| 6YY6-4-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 60,000 | 414 |
| 6YY6-6-4C | 3/4" - 16 UNF | 9/16" - 18 UNF | 1.50 | 38.10 | 1.00 | 25.40 | 60,000 | 414 |
| 6YY6-6-9C | 3/4" - 16 UNF | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 60,000 | 414 |
| 6YY6-9-4C | 1-1/8" - 12 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 1.37 | 34.80 | 60,000 | 414 |
| 6YY6-9-6C | 1-1/8" - 12 UNF | 3/4" - 16 UNF | 1.87 | 47.50 | 1.37 | 34.80 | 60,000 | 414 |
| 6YY6-9-9C | 1-1/8" - 12 UNF | 1-1/8" - 12 UNF | 2.26 | 57.40 | 1.375 | 34.93 | 60,000 | 414 |

Y6Y6 — Male High Pressure x Male High Pressure



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y6Y6-4-4C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.68 | 42.67 | 0.62 | 15.75 | 60,000 | 414 |
| Y6Y6-4-6C | 9/16" - 18 UNF | 3/4" - 16 UNF | 2.06 | 52.32 | 0.75 | 19.05 | 60,000 | 414 |
| Y6Y6-4-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 2.25 | 57.15 | 1.12 | 28.45 | 60,000 | 414 |
| Y6Y6-6-6C | 3/4" - 16 UNF | 3/4" - 16 UNF | 2.25 | 57.15 | 0.75 | 19.05 | 60,000 | 414 |
| Y6Y6-6-9C | 3/4" - 16 UNF | 1-1/8" - 12 UNF | 2.50 | 63.50 | 1.12 | 28.45 | 60,000 | 414 |
| Y6Y6-9-9C | 1-1/8" - 12 UNF | 1-1/8" - 12 UNF | 2.62 | 66.55 | 1.12 | 28.45 | 60,000 | 414 |

X6Y6 — Low Angle Face Seal x Male High Pressure




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| X6Y6-6-9C* | 9/16"-18 UNF | 1-1/8" - 12 UNF | 2.00 | 50.80 | 1.125 | 28.58 | 60,000 | 414 |

*Non-standard part - may require longer lead time


High Pressure Adapters

6Y6Y — Female High Pressure, Straight Coupling




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 6Y6Y-4-4C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.75 | 44.45 | 1.00 | 25.40 | 60,000 | 414 |
| 6Y6Y-6-6C | 3/4" - 16 UNF | 3/4" - 16 UNF | 2.00 | 50.80 | 1.00 | 25.40 | 60,000 | 414 |
| 6Y6Y-9-9C | 1-1/8" - 12 UNF | 1-1/8" - 12 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 60,000 | 414 |

6Y6Y — Female High Pressure, Reducer Coupling



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 6Y6Y-4-6C | 9/16" - 18 UNF | 3/4" - 16 UNF | 1.62 | 41.15 | 1.00 | 25.40 | 60,000 | 414 |
| 6Y6Y-4-9C | 9/16" - 18 UNF | 1-1/8" - 12 UNF | 1.75 | 44.45 | 1.37 | 34.80 | 60,000 | 414 |
| 6Y6Y-6-9C | 3/4" - 16 UNF | 1-1/8" - 12 UNF | 2.00 | 50.80 | 1.37 | 34.80 | 60,000 | 414 |

Y6D9 — Male High Pressure x Male BSP




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|------|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y6D9-4-6C | 9/16" - 18 UNF | G3/8 - 19 | 1.57 | 39.88 | 0.875 | 22.23 | 30,000 * | 207* |
| Y6D9-6-6C | 3/4" - 16 UNF | G3/8 - 19 | 1.85 | 46.99 | 0.875 | 22.23 | 30,000 * | 207* |

*BSP connection end lowers working pressure to 30,000psi


High Pressure Adapters

L6Y — High Pressure Elbow




| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| L6Y-4C | 9/16" - 18 UNF | 1.00 | 1.37 | 34.80 | 1.50 | 38.10 | 0.87 | 22.10 | 1.00 | 25.40 | 60,000 | 414 |
| L6Y-6C | 3/4" - 16 UNF | 1.00 | 1.75 | 44.45 | 1.50 | 38.10 | 1.25 | 31.75 | 1.00 | 25.40 | 60,000 | 414 |
| L6Y-9C | 1-1/8" - 12 UNF | 1.50 | 2.62 | 66.55 | 1.87 | 47.50 | 1.12 | 28.45 | 1.12 | 28.45 | 60,000 | 414 |

T6Y — High Pressure Tee



| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| T6Y-4C | 9/16" - 18 UNF | 1.00 | 2.00 | 50.80 | 1.37 | 34.80 | 1.00 | 25.40 | 0.87 | 22.10 | 60,000 | 414 |
| T6Y-6C | 3/4" - 16 UNF | 1.00 | 2.00 | 50.80 | 1.56 | 39.62 | 1.00 | 25.40 | 1.06 | 26.92 | 60,000 | 414 |
| T6Y-9C | 1-1/8" - 12 UNF | 1.50 | 2.62 | 66.55 | 2.12 | 53.85 | 1.62 | 41.15 | 1.37 | 34.80 | 60,000 | 414 |


X6Y — High Pressure Cross






| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| X6Y-4C | 9/16" - 18 UNF | 1.00 | 2.00 | 50.80 | 1.50 | 38.10 | 1.00 | 25.40 | 0.75 | 19.05 | 60,000 | 414 |
| X6Y-6C | 3/4" - 16 UNF | 1.00 | 2.12 | 53.85 | 2.00 | 50.80 | 1.06 | 26.92 | 1.00 | 25.40 | 60,000 | 414 |
| X6Y-9C | 1-1/8" - 12 UNF | 1.50 | 2.75 | 69.85 | 2.62 | 66.55 | 1.37 | 34.80 | 1.31 | 33.27 | 60,000 | 414 |


High Pressure Adapters



Y4N — High Pressure Gland Nut




| Part Number | Thread Size | Hex Size | | Max. Working Pressure | |
|-------------|---|---|---|-----------------------|-----|
| | | inch | mm | psi | MPa |
| # |  |  |  | | |
| Y4N-4C | 9/16" - 18 UNF | 0.625 | 15.89 | 60,000 | 414 |
| Y4N-6C | 3/4" - 16 UNF | 0.813 | 20.64 | 60,000 | 414 |
| Y4N-9C | 1-1/8" - 12 UNF | 1.188 | 30.16 | 60,000 | 414 |


Y4C — High Pressure Collar



| Part Number | Thread Size | Max. Working Pressure | |
|-------------|--|--|-----|
| | | psi | MPa |
| # |  |  | |
| Y4C-4C | 1/4" - 28 UNF LH | 60,000 | 414 |
| Y4C-6C | 3/8" - 24 UNF LH | 60,000 | 414 |
| Y4C-9C | 9/16" - 18 UNF LH | 60,000 | 414 |


HBPHM— High Pressure Plug



| Part Number | Tube Size (O.D.) | Max. Working Pressure | |
|-------------|------------------|---|-----|
| | | psi | MPa |
| # | |  | |
| HBPHM4-B | 1/4" | 60,000 | 414 |
| HBPHM6-B | 3/8" | 60,000 | 414 |
| HBPHM9-B | 9/16" | 60,000 | 414 |


High Pressure Adapters

High Pressure Caps



| Part Number | Thread Size | Overall Length | | Hex | | Max. Working Pressure | |
|-------------|-------------|----------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| 6Y4C-CAP | 1/4" H.P. | 1.07 | 27.18 | 0.875 | 22.23 | 60,000 | 414 |
| 6Y6C-CAP | 3/8" H.P. | 1.26 | 32.00 | 1.000 | 25.40 | 60,000 | 414 |
| 6Y9C-CAP | 9/16" H.P. | 1.50 | 38.10 | 1.375 | 34.93 | 60,000 | 414 |

Locking Nut/Collar — Anti-vibration



| Part Number | Size Tube O.D. | Thread Size | A Length | | H Hex | |
|-------------------|----------------|-----------------|----------|-------|-------|-------|
| | | | inch | mm | inch | mm |
| # | | | | | | |
| KCGL40-316-ACL40* | 1/4" H.P. | 9/16" - 18 UNF | 0.68 | 17.27 | 0.63 | 16.00 |
| KCGL60-316-ACL60 | 3/8" H.P. | 3/4" - 16 UNF | 1.06 | 26.92 | 0.68 | 17.27 |
| KCGL90-316-ACL90 | 9/16" H.P. | 1-1/8" - 12 UNF | 1.56 | 39.62 | 1.68 | 42.67 |

*Non-standard part - may require longer lead time

Y404, Y406 and Y409 — High Pressure Nipple



| Length | 1/4" O.D. | 3/8" O.D. | 9/16" O.D. |
|--------|-------------|------------|-------------|
| 2.75" | Y404-0275C | | |
| 3" | Y404-0300C | Y406-0300C | |
| 4" | Y404-0400C | Y406-0400C | Y409-0400C |
| 6" | Y404-0600C | Y406-0600C | Y409-0600C |
| 8" | Y404-0800C | Y406-0800C | Y409-0800C |
| 10" | Y404-1000C* | Y406-1000C | Y409-1000C* |
| 12" | Y404-1200C | Y406-1200C | Y409-1200C* |

*Non-standard part - may require longer lead time

NPT Adapters



polyflex offers a broad range of high quality stainless steel high pressure NPT adapters. Sizes ranging from 1/16" to 1/2" are rated up to **15,000 psi**; 3/4" and above are rated to **10,000 psi**.

Advantages:

- Used world-wide in OEM and MRO applications
- Compact size make NPT a suitable selection for plumbing in limited or tight space in a compact system

Thread Sizes:

- 1/16" - 27
- 1/8" - 27
- 1/4" - 18
- 3/8" - 18
- 1/2" - 14
- 3/4" - 14
- 1" - 11-1/2

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-26

NPT Adapters


K0101— Male NPT x Male NPT



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|----------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 10K0101-12-12C | 3/4" - 14 NPT | 3/4" - 14 NPT | 2.44 | 61.98 | 1.13 | 28.70 | 10,000 | 69 |
| 10K0101-16-16C | 1" - 11-1/2 NPT | 1" - 11-1/2 NPT | 2.75 | 69.85 | 1.38 | 35.05 | 10,000 | 69 |
| 15K0101-1-1C | 1/16" - 27 NPT | 1/16" - 27 NPT | 1.00 | 25.40 | 0.38 | 9.65 | 15,000 | 103 |
| 15K0101-2-2C | 1/8" - 27 NPT | 1/8" - 27 NPT | 1.20 | 30.48 | 0.50 | 12.70 | 15,000 | 103 |
| 15K0101-4-4C | 1/4" - 18 NPT | 1/4" - 18 NPT | 1.44 | 36.58 | 0.63 | 16.00 | 15,000 | 103 |
| 15K0101-6-6C | 3/8" - 18 NPT | 3/8" - 18 NPT | 1.70 | 43.18 | 0.75 | 19.05 | 15,000 | 103 |
| 15K0101-8-8C | 1/2" - 14 NPT | 1/2" - 14 NPT | 2.25 | 57.15 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0101-2-1C | 1/8" - 27 NPT | 1/16" - 27 NPT | 1.13 | 28.70 | 0.50 | 12.70 | 15,000 | 103 |
| 15K0101-2-4C | 1/8" - 27 NPT | 1/4" - 18 NPT | 1.35 | 34.29 | 0.625 | 15.88 | 15,000 | 103 |
| 15K0101-6-8C | 3/8" - 18 NPT | 1/2" - 14 NPT | 1.85 | 46.99 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0101-12-6C | 3/4" - 14 NPT | 3/8" - 18 NPT | 1.95 | 49.53 | 1.125 | 28.58 | 15,000 | 103 |
| 15K0101-16-6C | 1" - 11-1/2 NPT | 3/8" - 18 NPT | 2.16 | 54.86 | 1.375 | 34.93 | 15,000 | 103 |
| 10K0101-12-4C | 3/4" - 14 NPT | 1/4" - 18 NPT | 2.03 | 51.56 | 1.125 | 28.58 | 10,000 | 69 |
| 10K0101-16-4C | 1" - 11-1/2 NPT | 1/4" - 18 NPT | 2.16 | 54.86 | 1.375 | 34.93 | 10,000 | 69 |
| 10K0101-16-12C | 1" - 11-1/2 NPT | 3/4" - 14 NPT | 2.56 | 65.02 | 1.375 | 34.93 | 10,000 | 69 |

NPT Adapters

K0201— Female NPT x Male NPT




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|----------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 15K0201-1-8C | 1/16" - 27 NPT | 1/2" - 14 NPT | 1.25 | 31.75 | 0.87 | 22.10 | 15,000 | 103 |
| 15K0201-2-8C | 1/8" - 27 NPT | 1/2" - 14 NPT | 1.25 | 31.75 | 0.87 | 22.10 | 15,000 | 103 |
| 15K0201-4-8C | 1/4" - 18 NPT | 1/2" - 14 NPT | 1.25 | 31.75 | 0.87 | 22.10 | 15,000 | 103 |
| 15K0201-6-8C | 3/8" - 18 NPT | 1/2" - 14 NPT | 1.63 | 41.40 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0201-1-4C | 1/16" - 27 NPT | 1/4" - 18 NPT | 1.30 | 33.02 | 0.625 | 15.88 | 15,000 | 103 |
| 15K0201-2-1C | 1/8" - 27 NPT | 1/16" - 27 NPT | 1.38 | 35.05 | 0.75 | 19.05 | 15,000 | 103 |
| 15K0201-4-1C | 1/4" - 18 NPT | 3/4" - 14 NPT | 1.56 | 39.62 | 0.875 | 22.23 | 15,000 | 103 |
| 15K0201-4-6C | 1/4" - 18 NPT | 3/8" - 18 NPT | 1.50 | 38.10 | 0.87 | 22.10 | 15,000 | 103 |
| 15K0201-6-2C | 3/8" - 18 NPT | 1/8" - 27 NPT | 1.58 | 40.13 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0201-6-6C | 3/8" - 18 NPT | 3/8" - 18 NPT | 1.78 | 45.21 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0201-8-8C | 1/2" - 14 NP | 1/2" - 14 NPT | 2.13 | 54.10 | 1.25 | 31.75 | 15,000 | 103 |
| 10K0201-4-12C | 1/4" - 18 NPT | 3/4" - 14 NPT | 1.63 | 41.40 | 1.125 | 28.58 | 10,000 | 69 |
| 10K0201-6-12C | 3/8" - 18 NPT | 3/4" - 14 NPT | 1.60 | 40.64 | 1.125 | 28.58 | 10,000 | 69 |
| 10K0201-6-16C | 3/8" - 18 NPT | 1" - 11-1/2 NPT | 1.90 | 48.26 | 1.375 | 34.93 | 10,000 | 69 |
| 10K0201-12-6C | 3/4" - 14 NPT | 3/8" - 18 NPT | 2.25 | 57.15 | 1.50 | 38.10 | 10,000 | 69 |
| 10K0201-12-12C | 3/4" - 14 NPT | 3/4" - 14 NPT | 2.25 | 57.15 | 1.50 | 38.10 | 10,000 | 69 |
| 10K0201-12-16C | 3/4" - 14 NPT | 1" - 11-1/2 NPT | 2.25 | 57.15 | 1.50 | 38.10 | 10,000 | 69 |
| 10K0201-16-6C | 1" - 11-1/2 NPT | 3/8" - 18 NPT | 2.35 | 59.69 | 2.00 | 50.80 | 10,000 | 69 |
| 10K0201-16-8C | 1" - 11-1/2 NPT | 1/2" - 14 NPT | 2.50 | 63.50 | 2.00 | 50.80 | 10,000 | 69 |

For detailed ordering information, please consult price list or contact Parflex Division.


NPT Adapters

K0202— Female NPT x Female NPT



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|----------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 15K0202-2-2C | 1/8" - 27 NPT | 1/8" - 27 NPT | 1.50 | 38.10 | 0.75 | 19.05 | 15,000 | 103 |
| 15K0202-4-1C | 1/4" - 18 NPT | 1/16" - 27 NPT | 1.63 | 41.40 | 0.875 | 22.23 | 15,000 | 103 |
| 15K0202-4-4C | 1/4" - 18 NPT | 1/4" - 18 NPT | 1.75 | 44.45 | 0.87 | 22.10 | 15,000 | 103 |
| 15K0202-6-2C | 3/8" - 18 NPT | 1/8" - 27 NPT | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0202-6-6C | 3/8" - 18 NPT | 3/8" - 18 NPT | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 15K0202-8-1C | 1/2" - 14 NPT | 1/16" - 27 NPT | 1.75 | 44.45 | 1.25 | 31.75 | 15,000 | 103 |
| 15K0202-8-2C | 1/2" - 14 NPT | 1/8" - 27 NPT | 1.75 | 44.45 | 1.25 | 31.75 | 15,000 | 103 |
| 15K0202-8-6C | 1/2" - 14 NPT | 3/8" - 18 NPT | 1.75 | 44.45 | 1.25 | 31.75 | 15,000 | 103 |
| 15K0202-8-8C | 1/2" - 14 NPT | 1/2" - 14 NPT | 2.13 | 54.10 | 1.25 | 31.75 | 15,000 | 103 |
| 10K0202-12-4C | 3/4" - 14 NPT | 1/4" - 18 NPT | 2.00 | 50.80 | 1.50 | 38.10 | 10,000 | 69 |
| 10K0202-12-6C | 3/4" - 14 NPT | 3/8" - 18 NPT | 2.00 | 50.80 | 1.50 | 38.10 | 10,000 | 69 |
| 10K0202-12-12C | 3/4" - 14 NPT | 3/4" - 14 NPT | 2.13 | 54.10 | 1.50 | 38.10 | 10,000 | 69 |
| 10K0202-12-16C | 3/4" - 14 NPT | 1" - 11-1/2 NPT | 2.38 | 60.45 | 2.00 | 50.80 | 10,000 | 69 |
| 10K0202-16-16C | 1" - 11-1/2 NPT | 1" - 11-1/2 NPT | 2.50 | 63.50 | 2.00 | 50.80 | 10,000 | 69 |


YA02 — Male Type "M" x Female NPT



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| YA02-6-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 1.50 | 38.10 | 0.75 | 19.05 | 15,000 | 103 |
| YA02-6-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 2.00 | 50.80 | 1.25 | 31.75 | 15,000 | 103 |
| YA02-6-16C | 9/16" - 18 UNF | 1" - 11-1/2 NPT | 2.38 | 60.45 | 2.00 | 50.80 | 10,000 | 69 |
| YA02-8-4C | 3/4" - 16 UNF | 1/4" - 18 NPT | 1.63 | 41.40 | 0.875 | 22.23 | 15,000 | 103 |
| YA02-8-6C | 3/4" - 16 UNF | 3/8" - 18 NPT | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| YA02-8-8C | 3/4" - 16 UNF | 1/2" - 14 NPT | 2.00 | 50.80 | 1.25 | 31.75 | 15,000 | 103 |
| YA02-8-12C | 3/4" - 16 UNF | 3/4" - 14 NPT | 2.13 | 54.10 | 1.5 | 38.10 | 10,000 | 69 |
| YA02-11-8C | 1" - 12 UNF | 1/2" - 14 NPT | 2.50 | 63.50 | 1.00 | 25.40 | 15,000 | 103 |
| YA02-11-12C | 1" - 12 UNF | 3/4" - 14 NPT | 2.13 | 54.10 | 1.50 | 38.10 | 10,000 | 69 |
| YA02-16-16C | 1-5/16" - 12 UNF | 1" - 11-1/2 NPT | 2.38 | 60.45 | 2.00 | 50.80 | 10,000 | 69 |

NPT Adapters

YA01 — Male Type “M” x Male NPT




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|---------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| YA01-6-2C | 9/16" - 18 UNF | 1/8" - 27 NPT | 1.28 | 32.51 | 0.63 | 16.00 | 15,000 | 103 |
| YA01-6-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 1.38 | 35.05 | 0.63 | 16.00 | 15,000 | 103 |
| YA01-6-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 1.57 | 39.88 | 0.75 | 19.05 | 15,000 | 103 |
| YA01-6-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 1.75 | 44.45 | 0.88 | 22.35 | 15,000 | 103 |
| YA01-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPT | 1.95 | 49.53 | 1.13 | 28.58 | 10,000 | 69 |
| YA01-6-16C | 9/16" - 18 UNF | 1" - 11-1/2 NPT | 2.26 | 57.40 | 1.38 | 34.93 | 10,000 | 69 |
| YA01-8-4C | 3/4" - 16 UNF | 1/4" - 18 NPT | 1.8 | 45.72 | 0.75 | 19.05 | 15,000 | 103 |
| YA01-8-6C | 3/4" - 16 UNF | 3/8" - 18 NPT | 1.73 | 43.94 | 0.75 | 19.05 | 15,000 | 103 |
| YA01-8-8C | 3/4" - 16 UNF | 1/2" - 14 NPT | 1.95 | 49.53 | 0.88 | 22.35 | 15,000 | 103 |
| YA01-8-12C | 3/4" - 16 UNF | 3/4" - 14 NPT | 2.13 | 54.10 | 1.13 | 28.70 | 10,000 | 69 |
| YA01-8-16C | 3/4" - 16 UNF | 1" - 11-1/2 NPT | 2.38 | 60.45 | 1.38 | 35.05 | 10,000 | 69 |
| YA01-11-6C | 1" - 12 UNF | 3/8" - 18 NPT | 1.85 | 46.99 | 1.00 | 25.40 | 15,000 | 103 |
| YA01-11-8C | 1" - 12 UNF | 1/2" - 14 NPT | 2.00 | 50.80 | 1.00 | 25.40 | 15,000 | 103 |
| YA01-11-12C | 1" - 12 UNF | 3/4" - 14 NPT | 2.13 | 54.10 | 1.13 | 28.70 | 10,000 | 69 |
| YA01-11-16C | 1" - 12 UNF | 1" - 11-1/2 NPT | 2.38 | 60.45 | 1.38 | 35.05 | 10,000 | 69 |
| YA01-16-8C | 1-5/16" - 12 UNF | 1/2" - 14 NPT | 2.13 | 54.10 | 1.38 | 35.05 | 15,000 | 103 |
| YA01-16-12C | 1-5/16" - 12 UNF | 3/4" - 14 NPT | 2.38 | 60.45 | 1.38 | 35.05 | 10,000 | 69 |
| YA01-16-16C | 1-5/16" - 12 UNF | 1" - 11-1/2 NPT | 2.5 | 63.50 | 1.38 | 35.05 | 10,000 | 69 |
| YA01-16-20C | 1-5/16" - 12 UNF | 1-1/4" - 11-1/2 NPT | 2.75 | 69.85 | 1.75 | 44.45 | 10,000 | 69 |
| YA01-16-24C | 1-5/16" - 12 UNF | 1-1/2" - 11-1/2 NPT | 2.75 | 69.85 | 2.00 | 50.80 | 7,500 | 52 |
| YA01-16-32C | 1-5/16" - 12 UNF | 2" - 11-1/2 NPT | 2.75 | 69.85 | 2.38 | 60.45 | 7,500 | 52 |

For detailed ordering information, please consult price list or contact Parflex Division.

NPT Adapters

5Y01 — Female Medium Pressure x Male NPT




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5Y01-4-2C | 7/16" - 20 UNF | 1/8" - 27 NPT | 1.43 | 36.32 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y01-4-4C | 7/16" - 20 UNF | 1/4" - 18 NPT | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y01-4-6C | 7/16" - 20 UNF | 3/8" - 18 NPT | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y01-4-8C | 7/16" - 20 UNF | 1/2" - 14 NPT | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y01-4-12C | 7/16" - 20 UNF | 3/4" - 14 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y01-4-16C* | 7/16" - 20 UNF | 1" - 11-1/2 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y01-6-2C* | 9/16" - 18 UNF | 1/8" - 27 NPT | 1.43 | 36.32 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y01-6-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y01-6-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y01-6-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 1.74 | 44.20 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y01-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y01-6-16C | 9/16" - 18 UNF | 1" - 11-1/2 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y01-9-2C* | 13/16" - 16 UNF | 1/8" - 27 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y01-9-4C | 13/16" - 16 UNF | 1/4" - 18 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y01-9-6C | 13/16" - 16 UNF | 3/8" - 18 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y01-9-8C | 13/16" - 16 UNF | 1/2" - 14 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y01-9-12C | 13/16" - 16 UNF | 3/4" - 14 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y01-9-16C | 13/16" - 16 UNF | 1" - 11-1/2 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y01-12-2C* | 3/4" - 14 NPS | 1/8" - 27 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-12-4C | 3/4" - 14 NPS | 1/4" - 18 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-12-6C* | 3/4" - 14 NPS | 3/8" - 18 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-12-8C | 3/4" - 14 NPS | 1/2" - 14 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-12-12C | 3/4" - 14 NPS | 3/4" - 14 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-12-16C | 3/4" - 14 NPS | 1" - 11-1/2 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-16-2C* | 1-3/8" - 12 UNF | 1/8" - 27 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-16-4C | 1-3/8" - 12 UNF | 1/4" - 18 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-16-6C* | 1-3/8" - 12 UNF | 3/8" - 18 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-16-8C | 1-3/8" - 12 UNF | 1/2" - 14 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-16-12C | 1-3/8" - 12 UNF | 3/4" - 14 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y01-16-16C | 1-3/8" - 12 UNF | 1" - 11-1/2 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 10,000 | 69 |

*Non-standard part - may require longer lead time

NPT Adapters

02Y5 — Female NPT x Male Medium Pressure




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|--------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 02Y5-1-9C | 1/16" - 27 NPT | 13/16" - 16 UNF | 2.00 | 50.80 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-2-4C | 1/8" - 27 NPT | 7/16" - 20 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y5-2-6C | 1/8" - 27 NPT | 9/16" - 18 UNF | 1.87 | 47.50 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y5-2-9C | 1/8" - 27 NPT | 13/16" - 16 UNF | 1.87 | 47.50 | 0.87 | 22.10 | 15,000 | 103 |
| 02Y5-2-12C | 1/8" - 27 NPT | 3/4" - 14 NPSM | 2.00 | 50.80 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-2-16C* | 1/8" - 27 NPT | 1" - 14 UNF LH | 3.00 | 76.20 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y5-4-4C | 1/4" - 18 NPT | 7/16" - 20 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y5-4-6C | 1/4" - 18 NPT | 9/16" - 18 UNF | 1.87 | 47.50 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y5-4-9C | 1/4" - 18 NPT | 13/16" - 16 UNF | 1.87 | 47.50 | 0.87 | 22.10 | 15,000 | 103 |
| 02Y5-4-12C | 1/4" - 18 NPT | 3/4" - 14 NPSM | 2.00 | 50.80 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-4-16C | 1/4" - 18 NPT | 1" - 14 UNF LH | 3.00 | 76.20 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y5-6-4C | 3/8" - 18 NPT | 7/16" - 20 UNF | 2.00 | 50.80 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y5-6-6C | 3/8" - 18 NPT | 9/16" - 18 UNF | 2.12 | 53.85 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y5-6-9C | 3/8" - 18 NPT | 13/16" - 16 UNF | 2.25 | 57.15 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y5-6-12C | 3/8" - 18 NPT | 3/4" - 14 NPSM | 2.00 | 50.80 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-6-16C | 3/8" - 18 NPT | 1" - 14 UNF LH | 3.00 | 76.20 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y5-8-4C | 1/2" - 14 NPT | 7/16" - 20 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-8-6C | 1/2" - 14 NPT | 9/16" - 18 UNF | 1.25 | 31.75 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-8-9C | 1/2" - 14 NPT | 13/16" - 16 UNF | 2.37 | 60.20 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-8-12C | 1/2" - 14 NPT | 3/4" - 14 NPSM | 2.50 | 63.50 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-8-16C | 1/2" - 14 NPT | 1" - 14 UNF LH | 3.75 | 95.25 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y5-12-4C* | 3/4" - 14 NPT | 7/16" - 20 UNF | 2.37 | 60.20 | 1.37 | 34.80 | 10,000 | 69 |
| 02Y5-12-6C | 3/4" - 14 NPT | 9/16" - 18 UNF | 2.50 | 63.50 | 1.37 | 34.80 | 10,000 | 69 |
| 02Y5-12-9C | 3/4" - 14 NPT | 13/16" - 16 UNF | 2.62 | 66.55 | 1.37 | 34.80 | 10,000 | 69 |
| 02Y5-12-12C | 3/4" - 14 NPT | 3/4" - 14 NPSM | 2.75 | 69.85 | 1.50 | 38.10 | 10,000 | 69 |
| 02Y5-12-16C | 3/4" - 14 NPT | 1" - 14 UNF LH | 4.12 | 104.65 | 1.50 | 38.10 | 10,000 | 69 |
| 02Y5-16-6C | 1-3/8" - 12 UNF | 9/16" - 18 UNF | 2.87 | 72.90 | 1.87 | 47.50 | 10,000 | 69 |
| 02Y5-16-9C | 1-3/8" - 12 UNF | 13/16" - 16 UNF | 3.00 | 76.20 | 1.87 | 47.50 | 10,000 | 69 |
| 02Y5-16-12C | 1-3/8" - 12 UNF | 3/4" - 14 NPSM | 3.00 | 76.20 | 1.87 | 47.50 | 10,000 | 69 |
| 02Y5-16-16C | 1-3/8" - 12 UNF | 1" - 14 UNF LH | 4.37 | 111.00 | 1.87 | 47.50 | 10,000 | 69 |

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

NPT Adapters

Y501 — Male Medium Pressure x Male NPT




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|--------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y501-4-4C | 7/16" - 20 UNF | 1/4" - 18 NPT | 1.60 | 40.64 | 0.63 | 16.00 | 15,000 | 103 |
| Y501-4-8C | 7/16" - 20 UNF | 1/2" - 14 NPT | 2.12 | 53.85 | 0.87 | 22.10 | 15,000 | 103 |
| Y501-6-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 2.06 | 52.32 | 0.75 | 19.05 | 15,000 | 103 |
| Y501-6-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 2.06 | 52.32 | 0.75 | 19.05 | 15,000 | 103 |
| Y501-6-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 2.18 | 55.37 | 0.87 | 22.10 | 15,000 | 103 |
| Y501-9-2C* | 13/16" - 16 UNF | 1/8" - 27 NPT | 2.12 | 53.85 | 0.87 | 22.10 | 15,000 | 103 |
| Y501-9-4C | 13/16" - 16 UNF | 1/4" - 18 NPT | 2.25 | 57.15 | 0.87 | 22.10 | 15,000 | 103 |
| Y501-9-6C | 13/16" - 16 UNF | 3/8" - 18 NPT | 2.25 | 57.15 | 0.87 | 22.10 | 15,000 | 103 |
| Y501-9-8C | 13/16" - 16 UNF | 1/2" - 14 NPT | 2.37 | 60.20 | 0.87 | 22.10 | 15,000 | 103 |
| Y501-9-12C | 13/16" - 16 UNF | 3/4" - 14 NPT | 2.62 | 66.55 | 1.12 | 28.45 | 10,000 | 69 |
| Y501-9-16C | 13/16" - 16 UNF | 1" - 11-1/2 NPT | 2.62 | 66.55 | 1.37 | 34.80 | 10,000 | 69 |
| Y501-12-2C* | 3/4" - 14 NPS | 1/8" - 27 NPT | 2.37 | 60.20 | 1.12 | 28.45 | 15,000 | 103 |
| Y501-12-4C* | 3/4" - 14 NPS | 1/4" - 18 NPT | 2.50 | 63.50 | 1.12 | 28.45 | 15,000 | 103 |
| Y501-12-6C* | 3/4" - 14 NPS | 3/8" - 18 NPT | 2.50 | 63.50 | 1.12 | 28.45 | 15,000 | 103 |
| Y501-12-8C | 3/4" - 14 NPS | 1/2" - 14 NPT | 2.62 | 66.55 | 1.12 | 28.45 | 15,000 | 103 |
| Y501-12-12C | 3/4" - 14 NPS | 3/4" - 14 NPT | 2.75 | 69.85 | 1.12 | 28.45 | 10,000 | 69 |
| Y501-12-16C | 3/4" - 14 NPS | 1" - 11-1/2 NPT | 3.00 | 76.20 | 1.37 | 34.80 | 10,000 | 69 |
| Y501-16-2C* | 1-3/8" - 12 UNF | 1/8" - 27 NPT | 3.62 | 91.95 | 1.00 | 25.40 | 15,000 | 103 |
| Y501-16-4C | 1-3/8" - 12 UNF | 1/4" - 18 NPT | 3.75 | 95.25v | 1.00 | 25.40 | 15,000 | 103 |
| Y501-16-6C | 1-3/8" - 12 UNF | 3/8" - 18 NPT | 3.75 | 95.25 | 1.00 | 25.40 | 15,000 | 103 |
| Y501-16-8C | 1-3/8" - 12 UNF | 1/2" - 14 NPT | 3.87 | 98.30 | 1.00 | 25.40 | 15,000 | 103 |
| Y501-16-12C | 1-3/8" - 12 UNF | 3/4" - 14 NPT | 3.87 | 98.30 | 1.12 | 28.45 | 10,000 | 69 |
| Y501-16-16C | 1-3/8" - 12 UNF | 1" - 11-1/2 NPT | 4.00 | 101.60 | 1.37 | 34.80 | 10,000 | 69 |

*Non-standard part - may require longer lead time

NPT Adapters

5Y02 — Female Medium Pressure x Female NPT Coupling




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 5Y02-4-2C | 7/16" - 20 UNF | 1/8" - 27 NPT | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y02-4-4C | 7/16" - 20 UNF | 1/4" - 18 NPT | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y02-4-6C | 7/16" - 20 UNF | 3/8" - 18 NPT | 2.00 | 50.80 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y02-4-8C | 7/16" - 20 UNF | 1/2" - 14 NPT | 2.00 | 50.80 | 1.12 | 28.45 | 15,000 | 103 |
| 5Y02-4-12C* | 7/16" - 20 UNF | 3/4" - 14 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y02-4-16C* | 7/16" - 20 UNF | 1" - 11-1/2 NPT | 2.62 | 66.55 | 2.00 | 50.80 | 10,000 | 69 |
| 5Y02-6-2C | 9/16" - 18 UNF | 1/8" - 27 NPT | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y02-6-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 5Y02-6-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 2.12 | 53.85 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y02-6-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 5Y02-6-12C | 9/16" - 18 UNF | 3/4" - 14 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y02-6-16C* | 9/16" - 18 UNF | 1" - 11-1/2 NPT | 2.75 | 69.85 | 2.00 | 50.80 | 10,000 | 69 |
| 5Y02-9-2C* | 13/16" - 16 UNF | 1/8" - 27 NPT | 2.12 | 53.85 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y02-9-4C | 13/16" - 16 UNF | 1/4" - 18 NPT | 2.12 | 53.85 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y02-9-6C | 13/16" - 16 UNF | 3/8" - 18 NPT | 2.12 | 53.85 | 1.00 | 25.40 | 15,000 | 103 |
| 5Y02-9-8C | 13/16" - 16 UNF | 1/2" - 14 NPT | 2.25 | 57.15 | 1.12 | 28.45 | 15,000 | 103 |
| 5Y02-9-12C | 13/16" - 16 UNF | 3/4" - 14 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 10,000 | 69 |
| 5Y02-9-16C* | 13/16" - 16 UNF | 1" - 11-1/2 NPT | 2.87 | 72.90 | 2.00 | 50.80 | 10,000 | 69 |
| 5Y02-12-2C* | 3/4" - 14 NPS | 1/8" - 27 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y02-12-4C* | 3/4" - 14 NPS | 1/4" - 18 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y02-12-6C* | 3/4" - 14 NPS | 3/8" - 18 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y02-12-8C | 3/4" - 14 NPS | 1/2" - 14 NPT | 2.50 | 63.50 | 1.37 | 34.80 | 15,000 | 103 |
| 5Y02-12-12C | 3/4" - 14 NPS | 3/4" - 14 NPT | 2.75 | 69.85 | 1.50 | 38.10 | 10,000 | 69 |
| 5Y02-12-16C | 3/4" - 14 NPS | 1" - 11-1/2 NPT | 3.00 | 76.20 | 1.87 | 47.50 | 15,000 | 103 |
| 5Y02-16-2C* | 1-3/8" - 12 UNF | 1/8" - 27 NPT | 3.00 | 76.20 | 1.75 | 44.45 | 15,000 | 103 |
| 5Y02-16-4C* | 1-3/8" - 12 UNF | 1/4" - 18 NPT | 3.00 | 76.20 | 1.75 | 44.45 | 15,000 | 103 |
| 5Y02-16-6C* | 1-3/8" - 12 UNF | 3/8" - 18 NPT | 3.00 | 76.20 | 1.75 | 44.45 | 15,000 | 103 |
| 5Y02-16-8C* | 1-3/8" - 12 UNF | 1/2" - 14 NPT | 3.00 | 76.20 | 1.75 | 44.45 | 15,000 | 103 |
| 5Y02-16-12C | 1-3/8" - 12 UNF | 3/4" - 14 NPT | 3.50 | 88.90 | 1.50 | 38.10 | 10,000 | 69 |
| 5Y02-16-16C | 1-3/8" - 12 UNF | 1" - 11-1/2 NPT | 3.75 | 95.25 | 1.87 | 47.50 | 10,000 | 69 |

*Non-standard part - may require longer lead time

For detailed ordering information, please consult price list or contact Parflex Division.

NPT Adapters

6Y02 — Female High Pressure x Female NPT Coupling




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 6Y02-4-2C* | 9/16" - 18 UNF | 1/8" - 27 NPT | 1.50 | 38.10 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y02-4-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 1.50 | 38.10 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y02-4-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y02-4-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 1.87 | 47.50 | 1.12 | 28.45 | 15,000 | 103 |
| 6Y02-4-12C | 9/16" - 18 UNF | 3/4" - 14 NPT | 2.00 | 50.80 | 1.62 | 41.15 | 10,000 | 69 |
| 6Y02-4-16C* | 9/16" - 18 UNF | 1" - 11-1/2 NPT | 2.50 | 63.50 | 1.75 | 44.45 | 10,000 | 69 |
| 6Y02-6-2C | 3/4" - 16 UNF | 1/8" - 27 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y02-6-4C | 3/4" - 16 UNF | 1/4" - 18 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y02-6-6C | 3/4" - 16 UNF | 3/8" - 18 NPT | 1.87 | 47.50 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y02-6-8C | 3/4" - 16 UNF | 1/2" - 14 NPT | 1.87 | 47.50 | 1.12 | 28.45 | 15,000 | 103 |
| 6Y02-6-12C | 3/4" - 16 UNF | 3/4" - 14 NPT | 2.12 | 53.85 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y02-6-16C* | 3/4" - 16 UNF | 1" - 11-1/2 NPT | 2.50 | 63.50 | 1.75 | 44.45 | 10,000 | 69 |
| 6Y02-9-2C | 1-1/8" - 12 UNF | 1/8" - 27 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y02-9-4C | 1-1/8" - 12 UNF | 1/4" - 18 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y02-9-6C | 1-1/8" - 12 UNF | 3/8" - 18 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y02-9-8C | 1-1/8" - 12 UNF | 1/2" - 14 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y02-9-12C | 1-1/8" - 12 UNF | 3/4" - 14 NPT | 2.37 | 60.20 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y02-9-16C* | 1-1/8" - 12 UNF | 1" - 11-1/2 NPT | 2.62 | 66.55 | 2.00 | 50.80 | 10,000 | 69 |

*Non-standard part - may require longer lead time

NPT Adapters

6Y01 — Female High Pressure x Male NPT




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 6Y01-4-2C | 9/16" - 18 UNF | 1/8" - 27 NPT | 1.25 | 31.75 | 0.75 | 19.05 | 15,000 | 103 |
| 6Y01-4-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 1.37 | 34.80 | 0.75 | 19.05 | 15,000 | 103 |
| 6Y01-4-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 1.37 | 34.80 | 0.75 | 19.05 | 15,000 | 103 |
| 6Y01-4-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y01-4-12C | 9/16" - 18 UNF | 3/4" - 14 NPT | 1.75 | 44.45 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y01-4-16C | 9/16" - 18 UNF | 1" - 11-1/2 NPT | 1.62 | 41.15 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y01-6-1C | 3/4" - 16 UNF | 1/16" - 27 NPT | 1.63 | 41.40 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y01-6-2C* | 3/4" - 16 UNF | 1/8" - 27 NPT | 1.50 | 38.10 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y01-6-4C | 3/4" - 16 UNF | 1/4" - 18 NPT | 1.62 | 41.15 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y01-6-6C | 3/4" - 16 UNF | 3/8" - 18 NPT | 1.62 | 41.15 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y01-6-8C | 3/4" - 16 UNF | 1/2" - 14 NPT | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 6Y01-6-12C* | 3/4" - 16 UNF | 3/4" - 14 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y01-6-16C | 3/4" - 16 UNF | 1" - 11-1/2 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y01-9-2C* | 1-1/8" - 12 UNF | 1/8" - 27 NPT | 1.50 | 38.10 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y01-9-4C | 1-1/8" - 12 UNF | 1/4" - 18 NPT | 1.62 | 41.15 | 1.27 | 32.26 | 15,000 | 103 |
| 6Y01-9-6C | 1-1/8" - 12 UNF | 3/8" - 18 NPT | 1.75 | 44.45 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y01-9-8C | 1-1/8" - 12 UNF | 1/2" - 14 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 15,000 | 103 |
| 6Y01-9-12C | 1-1/8" - 12 UNF | 3/4" - 14 NPT | 1.87 | 47.50 | 1.37 | 34.80 | 10,000 | 69 |
| 6Y01-9-16C | 1-1/8" - 12 UNF | 1" - 11-1/2 NPT | 2.00 | 50.80 | 1.37 | 34.80 | 10,000 | 69 |

*Non-standard part - may require longer lead time


NPT Adapters

Y601 — Male High Pressure x Male NPT



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y601-4-2C | 9/16" - 18 UNF | 1/8" - 27 NPT | 1.87 | 47.50 | 0.62 | 15.75 | 15,000 | 103 |
| Y601-4-4C | 9/16" - 18 UNF | 1/4" - 18 NPT | 2.06 | 52.32 | 0.75 | 19.05 | 15,000 | 103 |
| Y601-4-6C | 9/16" - 18 UNF | 3/8" - 18 NPT | 2.00 | 50.80 | 0.75 | 19.05 | 15,000 | 103 |
| Y601-4-8C | 9/16" - 18 UNF | 1/2" - 14 NPT | 2.12 | 53.85 | 0.87 | 22.10 | 15,000 | 103 |
| Y601-4-12C | 9/16" - 18 UNF | 3/4" - 14 NPT | 2.25 | 57.15 | 1.12 | 28.45 | 10,000 | 69 |
| Y601-6-4C | 3/4" - 16 UNF | 1/4" - 18 NPT | 2.12 | 53.85 | 0.87 | 22.10 | 15,000 | 103 |
| Y601-6-6C | 3/4" - 16 UNF | 3/8" - 18 NPT | 2.12 | 53.85 | 0.87 | 22.10 | 15,000 | 103 |
| Y601-6-8C | 3/4" - 16 UNF | 1/2" - 14 NPT | 2.28 | 57.91 | 0.875 | 22.23 | 15,000 | 103 |
| Y601-9-4C | 1-1/8" - 12 UNF | 1/4" - 18 NPT | 2.37 | 60.20 | 1.12 | 28.45 | 15,000 | 103 |
| Y601-9-6C | 1-1/8" - 12 UNF | 3/8" - 18 NPT | 2.37 | 60.20 | 1.12 | 28.45 | 15,000 | 103 |
| Y601-9-8C | 1-1/8" - 12 UNF | 1/2" - 14 NPT | 2.50 | 63.50 | 1.12 | 28.45 | 15,000 | 103 |
| Y601-9-12C | 1-1/8" - 12 UNF | 3/4" - 14 NPT | 2.62 | 66.55 | 1.12 | 28.45 | 10,000 | 69 |
| Y601-9-16C | 1-1/8" - 12 UNF | 1" - 11-1/2 NPT | 2.75 | 69.85 | 1.37 | 34.80 | 10,000 | 69 |


02Y6 — Female NPT x Male High Pressure



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 02Y6-1-6C | 1/16" - 27 NPT | 3/4" - 16 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y6-2-4C | 1/8" - 27 NPT | 9/16" - 18 UNF | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y6-2-6C | 1/8" - 27 NPT | 3/4" - 16 UNF | 1.62 | 41.15 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y6-2-9C | 1/8" - 27 NPT | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y6-4-4C | 1/4" - 18 NPT | 9/16" - 18 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y6-4-6C | 1/4" - 18 NPT | 3/4" - 16 UNF | 1.75 | 44.45 | 0.75 | 19.05 | 15,000 | 103 |
| 02Y6-4-9C | 1/4" - 18 NPT | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y6-6-4C | 3/8" - 18 NPT | 9/16" - 18 UNF | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y6-6-6C | 3/8" - 18 NPT | 3/4" - 16 UNF | 1.75 | 44.45 | 1.00 | 25.40 | 15,000 | 103 |
| 02Y6-6-9C | 3/8" - 18 NPT | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y6-8-4C | 1/2" - 14 NPT | 9/16" - 18 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y6-8-6C | 1/2" - 14 NPT | 3/4" - 16 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y6-8-9C | 1/2" - 14 NPT | 1-1/8" - 12 UNF | 2.12 | 53.85 | 1.12 | 28.45 | 15,000 | 103 |
| 02Y6-12-6C | 3/4" - 14 NPT | 3/4" - 16 UNF | 1.50 | 38.10 | 1.62 | 41.15 | 10,000 | 69 |
| 02Y6-12-9C | 3/4" - 14 NPT | 1-1/8" - 12 UNF | 2.25 | 57.15 | 1.37 | 34.80 | 10,000 | 69 |
| 02Y6-16-9C | 1" - 11-1/2 NPT | 1-1/8" - 12 UNF | 2.00 | 50.80 | 2.75 | 69.85 | 10,000 | 69 |


NPT Adapters

K0203— Female NPT x Male JIC




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|----------------|-----------------|------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 10K0203-4-6C | 1/4" - 18 NPT | 9/16" - 18 UNF | 1.68 | 42.67 | 0.875 | 22.23 | 10,000 | 69 |
| 10K0203-4-8C | 1/4" - 18 NPT | 3/4" - 16 UNF | 1.79 | 45.47 | 0.875 | 22.23 | 10,000 | 69 |
| 10K0203-6-4C | 3/8" - 18 NPT | 7/16" - 20 UNF | 1.76 | 44.70 | 1.00 | 25.40 | 10,000 | 69 |
| 10K0203-6-6C | 3/8" - 18 NPT | 9/16" - 18 UNF | 1.68 | 42.67 | 1.00 | 25.40 | 10,000 | 69 |
| 10K0203-6-8C | 3/8" - 18 NPT | 3/4" - 16 UNF | 1.88 | 47.75 | 1.00 | 25.40 | 10,000 | 69 |
| 10K0203-8-4C | 1/2" - 14 NPT | 7/16" - 20 UNF | 2.05 | 52.07 | 1.25 | 31.75 | 10,000 | 69 |
| 10K0203-8-6C | 1/2" - 14 NPT | 9/16" - 18 UNF | 1.93 | 49.02 | 1.25 | 31.75 | 10,000 | 69 |
| 10K0203-8-8C | 1/2" - 14 NPT | 3/4" - 16 UNF | 2.04 | 51.82 | 1.25 | 31.75 | 10,000 | 69 |
| 10K0203-16-16C | 1" - 11-1/2 NPT | 1-5/16" - 12 UNF | 2.68 | 68.07 | 2.00 | 50.80 | 10,000 | 69 |

01D9 — Male NPT x Male BSP



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 01D9-6-6C | 3/8" - 18 NPT | G3/8 - 19 | 1.57 | 39.88 | 0.875 | 22.23 | 15,000 | 103 |
| 01D9-8-6C | 1/2" - 14 NPT | G3/8 - 19 | 1.86 | 47.24 | 0.875 | 22.23 | 15,000 | 103 |
| 01D9-8-8C | 1/2" - 14 NPT | G1/2 - 14 | 1.98 | 50.29 | 1.000 | 25.40 | 15,000 | 103 |

02D9 — Female NPT x Male BSP






| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 02D9-8-8C | 1/2" - 14 NPT | G1/2 - 14 | 2.10 | 53.34 | 1.25 | 31.75 | 15,000 | 103 |

For detailed ordering information, please consult price list or contact Parflex Division.


NPT Adapters



KL02 — NPT Elbow



| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|---|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|---|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # |  | | | | | | | | | | |  |
| 10KL02-12C | 3/4" - 14 NPT | 2.05 | 1.85 | 46.99 | 1.85 | 46.99 | 1.35 | 34.29 | 1.35 | 34.29 | 10,000 | 69 |
| 10KL02-16C | 1" - 11-1/2 NPT | 2.5 | 3.83 | 97.28 | 3.83 | 97.28 | 1.82 | 46.23 | 1.82 | 46.23 | 10,000 | 69 |
| 15KL02-4C | 1/4" - 18 NPT | 1.15 | 1.7 | 43.18 | 1.7 | 43.18 | 0.8 | 20.32 | 0.8 | 20.32 | 15,000 | 103 |
| 15KL02-6C | 3/8" - 18 NPT | 1.38 | 1.9 | 48.26 | 1.9 | 48.26 | 0.9 | 22.86 | 0.9 | 22.86 | 15,000 | 103 |
| 15KL02-8C | 1/2" - 14 NPT | 1.63 | 2.15 | 54.61 | 2.15 | 54.61 | 1.03 | 26.16 | 1.03 | 26.16 | 15,000 | 103 |


KL02 — NPT 45° Elbow



| Part Number | Thread Size | Thickness | E | | F | | G | | Max. Working Pressure | |
|---------------|---|-----------|------|-------|------|-------|------|-------|-----------------------|---|
| | | | inch | mm | inch | mm | inch | mm | psi | MPa |
| # |  | | | | | | | | |  |
| 15KL02-4C-45 | 1/4" - 18 NPT | 1.15 | 1.68 | 42.67 | 1.68 | 42.67 | 0.7 | 17.78 | 15,000 | 103 |
| 15KL02-6C-45 | 3/8" - 18 NPT | 1.38 | 1.89 | 48.01 | 1.89 | 48.01 | 0.91 | 23.11 | 15,000 | 103 |
| 15KL02-8C-45 | 1/2" - 14 NPT | 1.63 | 2.15 | 54.61 | 2.15 | 54.61 | 0.94 | 23.88 | 15,000 | 103 |
| 15KL02-12C-45 | 3/4" - 14 NPT | 2 | 2.88 | 73.15 | 2.88 | 73.15 | 1.2 | 30.48 | 10,000 | 69 |


NPT Adapters

KT02 — NPT Tee



| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| 10KT02-12C | 3/4" - 14 NPT | 2.05 | 2.70 | 68.58 | 1.85 | 46.99 | 1.35 | 34.29 | 2.05 | 52.07 | 10,000 | 69 |
| 10KT02-16C | 1" - 11-1/2 NPT | 2.50 | 3.63 | 92.20 | 3.83 | 97.28 | 1.82 | 46.23 | 2.5 | 63.50 | 10,000 | 69 |
| 15KT02-4C | 1/4" - 18 NPT | 1.15 | 1.60 | 40.64 | 1.7 | 43.18 | 0.8 | 20.32 | 1.15 | 29.21 | 15,000 | 103 |
| 15KT02-6C | 3/8" - 18 NPT | 1.38 | 1.80 | 45.72 | 1.9 | 48.26 | 0.9 | 22.86 | 1.38 | 35.05 | 15,000 | 103 |
| 15KT02-8C | 1/2" - 14 NPT | 1.63 | 2.05 | 52.07 | 2.15 | 54.61 | 1.03 | 26.16 | 1.63 | 41.40 | 15,000 | 103 |


KX02 — NPT Cross



| Part Number | Thread Size | Thickness | E | | F | | G | | H | | Max. Working Pressure | |
|-------------|-----------------|-----------|------|-------|------|-------|------|-------|------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | |
| 10KX02-12C | 3/4" - 14 NPT | 2.05 | 2.70 | 68.58 | 2.7 | 68.58 | 1.35 | 34.29 | 1.35 | 34.29 | 10,000 | 69 |
| 10KX02-16C | 1" - 11-1/2 NPT | 2.50 | 3.63 | 92.20 | 3.63 | 92.20 | 1.82 | 46.23 | 1.82 | 46.23 | 10,000 | 69 |
| 15KX02-4C | 1/4" - 18 NPT | 1.15 | 1.60 | 40.64 | 1.6 | 40.64 | 0.8 | 20.32 | 0.8 | 20.32 | 15,000 | 103 |
| 15KX02-6C | 3/8" - 18 NPT | 1.38 | 1.80 | 45.72 | 1.8 | 45.72 | 0.9 | 22.86 | 0.9 | 22.86 | 15,000 | 103 |
| 15KX02-8C | 1/2" - 14 NPT | 1.63 | 2.05 | 52.07 | 2.05 | 52.07 | 1.03 | 26.16 | 1.03 | 26.16 | 15,000 | 103 |


NPT Adapters

NPT Caps



| Part Number | Thread Size | Overall Length | | Hex | | Max. Working Pressure | |
|---------------|---------------|----------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| 15K02-2C-CAP | 1/8" - 27 NPT | 0.90 | 22.86 | 0.75 | 19.05 | 15,000 | 103 |
| 15K02-4C-CAP | 1/4" - 18 NPT | 1.16 | 29.46 | 0.875 | 22.23 | 15,000 | 103 |
| 15K02-6C-CAP | 3/8" - 18 NPT | 1.25 | 31.75 | 1.00 | 25.40 | 15,000 | 103 |
| 15K02-8C-CAP | 1/2" - 14 NPT | 1.43 | 36.32 | 1.25 | 31.75 | 15,000 | 103 |
| 15K02-12C-CAP | 3/4" - 14 NPT | 1.5 | 38.10 | 1.50 | 38.10 | 15,000 | 103 |

NPT Plugs



| Part Number | Thread Size | A Overall Length | | Hex | | Max. Working Pressure | |
|-------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| 10KP01-12C | 3/4" - 14 NPT | 1.45 | 36.83 | 1.125 | 28.58 | 10,000 | 69 |
| 10KP01-16C | 1" - 11-1/2 NPT | 1.81 | 45.97 | 1.375 | 34.93 | 10,000 | 69 |
| 15KP01-1C | 1/16" - 27 NPT | 0.68 | 17.27 | 0.375 | 9.53 | 15,000 | 103 |
| 15KP01-2C | 1/8" - 27 NPT | 0.75 | 19.05 | 0.50 | 12.70 | 15,000 | 103 |

JIC Adapters



Parker Parflex offers a wide range of high quality stainless steel high pressure JIC adapters from **10,000 psi to 15,000 psi** operating pressure. Sizes range from 1/4" to 1".

Advantages:


- All adapters are rated to a minimum operating pressure of 10,000 psi
- Meets SAE J514 configuration on flare end
- Compact envelope size for ease of installation

Sizes:

- 7/16" - 20 UNF
- 9/16" - 18 UNF
- 3/4" - 16 UNF
- 7/8" - 14 UNF
- 1-1/16" - 12 UNF
- 1-5/16" - 12 UNF


JIC Adapters

K0303— Male JIC x Male JIC




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 10K0303-4-4C | 7/16" - 20 UNF | 7/16" - 20 UNF | 1.50 | 38.10 | 0.625 | 15.88 | 10,000 | 69 |
| 10K0303-4-6C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.50 | 38.10 | 0.625 | 15.88 | 10,000 | 69 |
| 10K0303-4-8C | 7/16" - 20 UNF | 3/4" - 16 UNF | 1.72 | 43.69 | 0.875 | 22.23 | 10,000 | 69 |
| 10K0303-6-8C | 9/16" - 18 UNF | 3/4" - 16 UNF | 1.73 | 43.94 | 0.875 | 22.23 | 10,000 | 69 |

K0306— Male JIC x Female JIC



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 10K0306-4-4C | 7/16" - 20 UNF | 7/16" - 20 UNF | 1.43 | 36.32 | 0.75 | 19.05 | 10,000 | 69 |
| 10K0306-4-6C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.55 | 39.37 | 0.875 | 22.23 | 10,000 | 69 |
| 10K0306-4-8C | 7/16" - 20 UNF | 3/4" - 16 UNF | 1.60 | 40.64 | 1.00 | 25.40 | 10,000 | 69 |
| 10K0306-6-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.55 | 39.37 | 0.875 | 22.23 | 10,000 | 69 |
| 10K0306-8-6C | 3/4" - 16 UNF | 9/16" - 18 UNF | 1.55 | 39.37 | 0.875 | 22.23 | 10,000 | 69 |


K0606— Female JIC x Female JIC



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| 10K0606-4-4C | 7/16" - 20 UNF | 7/16" - 20 UNF | 1.35 | 34.29 | 0.75 | 19.05 | 10,000 | 69 |
| 10K0606-4-6C | 7/16" - 20 UNF | 9/16" - 18 UNF | 1.50 | 38.10 | 0.875 | 22.23 | 10,000 | 69 |
| 10K0606-6-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.40 | 35.56 | 0.875 | 22.23 | 10,000 | 69 |


JIC Adapters

YA03 — Male Type “M” x Male JIC




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|------------------|-------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| YA03-11-6C | 1" - 12 UNF | 9/16" - 18 UNF | 1.69 | 42.93 | 1.00 | 34.93 | 10,000 | 103 |
| YA03-16-8C | 1-5/16" - 12 UNF | 3/4" - 16 UNF | 1.79 | 45.47 | 1.375 | 34.93 | 10,000 | 103 |
| YA03-16-12C | 1-5/16" - 12 UNF | 1- 1/16" - 12 UNF | 2.00 | 50.80 | 1.375 | 34.93 | 10,000 | 69 |

Y503 — Male Medium Pressure x Male JIC



| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|------------------|------------------|--------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y503-4-8C | 7/16" - 20 UNF | 3/4" - 16 UNF | 1.74 | 44.20 | 0.875 | 22.23 | 15,000 | 103 |
| Y503-9-10C | 13/16" - 16 UNF | 7/8" - 14 UNF | 2.38 | 60.45 | 1.000 | 25.40 | 10,000 | 69 |
| Y503-9-12C | 13/16" - 16 UNF | 1-1/16" - 12 UNF | 2.47 | 62.74 | 1.125 | 28.58 | 10,000 | 69 |
| Y503-9-16C | 13/16" - 16 UNF | 1-5/16" - 12 UNF | 2.55 | 64.77 | 1.375 | 34.93 | 10,000 | 69 |
| Y503-12-6C | 3/4" - 14 NPSM | 9/16" - 18 UNF | 2.25 | 57.15 | 1.125 | 28.58 | 15,000 | 103 |
| Y503-12-8C | 3/4" - 14 NPSM | 3/4" - 16 UNF | 2.35 | 59.69 | 1.125 | 28.58 | 15,000 | 103 |
| Y503-12-12C | 3/4" - 14 NPSM | 1-1/16" - 12 UNF | 2.66 | 67.56 | 1.125 | 28.58 | 10,000 | 69 |
| Y503-16-12C | 1" - 14 UNF LH | 1-1/16" - 12 UNF | 4.02 | 102.11 | 1.125 | 28.58 | 10,000 | 69 |
| Y503-16-16C | 1" - 14 UNF LH | 1-5/16" - 12 UNF | 4.07 | 103.38 | 1.375 | 34.93 | 10,000 | 69 |

Y603 — Male High Pressure x Male JIC




| Part Number | T1 Thread Size | T2 Thread Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | |
| Y603-4-4C | 9/16" - 18 UNF | 7/16" - 20 UNF | 1.61 | 40.89 | 0.625 | 15.88 | 15,000 | 103 |
| Y603-4-6C | 9/16" - 18 UNF | 9/16" - 18 UNF | 1.61 | 40.89 | 0.625 | 15.88 | 15,000 | 103 |
| Y603-4-8C | 9/16" - 18 UNF | 3/4" - 16 UNF | 1.81 | 45.97 | 0.875 | 22.23 | 15,000 | 103 |
| Y603-6-4C | 3/4" - 16 UNF | 7/16" - 20 UNF | 1.84 | 46.74 | 0.750 | 19.05 | 15,000 | 103 |
| Y603-6-6C | 3/4" - 16 UNF | 9/16" - 18 UNF | 1.94 | 49.28 | 0.750 | 19.05 | 15,000 | 103 |
| Y603-6-8C | 3/4" - 16 UNF | 3/4" - 16 UNF | 2.04 | 51.82 | 0.875 | 22.23 | 15,000 | 103 |
| Y603-9-6C | 1-1/8" - 12 UNF | 9/16" - 18 UNF | 2.09 | 53.09 | 1.125 | 28.58 | 15,000 | 103 |
| Y603-9-8C | 1-1/8" - 12 UNF | 3/4" - 16 UNF | 2.19 | 55.63 | 1.125 | 28.58 | 15,000 | 103 |

For detailed ordering information, please consult price list or contact Parflex Division.


JIC Adapters

JIC Caps



| Part Number | Thread Size | Overall Length | | Hex | | Max. Working Pressure | |
|---------------|------------------|----------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| 10K06-4C-CAP | 7/16" - 20 UNF | 0.83 | 21.08 | 0.75 | 19.05 | 15,000 | 103 |
| 10K06-6C-CAP | 9/16" - 18 UNF | 0.93 | 23.62 | 0.875 | 22.23 | 15,000 | 103 |
| 10K06-8C-CAP | 3/4" - 16 UNF | 1.04 | 26.42 | 1.00 | 25.40 | 15,000 | 103 |
| 10K06-10C-CAP | 7/8" - 14 UNF | 1.16 | 29.46 | 1.25 | 31.75 | 10,000 | 69 |
| 10K06-12C-CAP | 1-1/16" - 12 UNF | 1.31 | 33.27 | 1.50 | 38.10 | 10,000 | 69 |

JIC Plugs



| Part Number | Thread Size | A Overall Length | | Hex | | Max. Working Pressure | |
|-------------|------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| 10KP03-4C | 7/16" - 20 UNF | 0.81 | 20.57 | 0.5 | 12.70 | 10,000 | 69 |
| 10KP03-6C | 9/16" - 18 UNF | 0.85 | 21.59 | 0.625 | 15.88 | 10,000 | 69 |
| 10KP03-8C | 3/4" - 16 UNF | 0.95 | 24.13 | 0.812 | 20.62 | 10,000 | 69 |
| 10KP03-10C | 7/8" - 14 UNF | 1.11 | 28.19 | 0.937 | 23.80 | 10,000 | 69 |
| 10KP03-16C | 1-5/16" - 12 UNF | 1.34 | 34.04 | 1.375 | 34.93 | 10,000 | 69 |

Valves

Medium Pressure — up to 20K psi

High Pressure — up to 60K psi



Developed to assure safe and easy plumbing through 60,000 psi, these needle valves are engineered to the highest standards of repeatable quality. The medium pressure valves are designed with a compact, cone-and-threaded connection which permits the larger bore sizes and increased flow rates common in this pressure class. The high pressure valves also use a cone-and-threaded connection which accommodates the high pressures common in these applications.

Non-rotating tip stems are standard for on-off service and ensure long life of valve seats.

Materials include high tensile Type 316 stainless steel bodies and hardened 17-4PH stainless steel lower section stems.

Standard packing is TFE with optional Viton®, BUNA-N and Grafoil available as non-standard.

Two-way straight valves are standard with five additional patterns available to satisfy a wide variety of requirements.

Features:

- Non-rotating stem tips
- Packing below stem threads
- Type 316 as high tensile bodies
- Positive gland lock device
- No stem adjustment needed
- Black T-handles are standard; choice of 4 colors available for special order
- Tube sizes:
 - Medium pressure — 1/4" through 1"
 - High pressure — 1/4" through 9/16"

For detailed ordering information, please consult price list or contact Parflex Division.


Parker Hannifin Corporation | Parflex Division | Stafford, TX | parker.com/pfd



C-46

Medium Pressure Valves


SV5Y — Two-way Straight Valves, Medium Pressure (20K psi)



| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | | |
|--------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|--------|-----|
| | | | | | | | | | | | | psi | MPa | |
| # | | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | inch | | |
| SV5Y-4C-20* | 1/4" M.P. | 0.51 | 1.37 | 7.00 | 3.00 | 0.75 | 1.50 | 3.75 | 0.62 | 1.75 | 0.43 | | 20,000 | 138 |
| SV5Y-6C-20 | 3/8" M.P. | 0.68 | 1.75 | 8.42 | 4.12 | 0.87 | 1.81 | 4.62 | 1.12 | 2.50 | 0.56 | | 20,000 | 138 |
| SV5Y-9C-20 | 9/16" M.P. | 0.10 | 0.75 | 4.37 | 2.00 | 0.37 | 0.81 | 2.00 | 0.37 | 1.25 | 0.21 | | 20,000 | 138 |
| SV5Y-12C-20* | 3/4" M.P. | 0.20 | 0.75 | 4.37 | 2.00 | 0.37 | 0.81 | 2.00 | 0.37 | 1.25 | 0.21 | | 20,000 | 138 |
| SV5Y-16C-20* | 1" M.P. | 0.31 | 1.00 | 6.12 | 2.50 | 0.50 | 1.12 | 2.87 | 0.50 | 1.37 | 0.34 | | 20,000 | 138 |

*Non-standard part - may require longer lead time


AV5Y — Two-way Angle Valves, Medium Pressure (20K psi)



| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | | |
|--------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|--------|-----|
| | | | | | | | | | | | | psi | MPa | |
| # | | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | inch | | |
| AV5Y-4C-20 | 1/4" M.P. | 0.10 | 0.75 | 4.81 | 2.00 | 1.00 | 1.25 | 2.43 | 0.37 | 1.25 | 0.21 | | 20,000 | 138 |
| AV5Y-6C-20 | 3/8" M.P. | 0.20 | 0.75 | 4.81 | 2.00 | 1.00 | 1.25 | 2.43 | 0.37 | 1.25 | 0.21 | | 20,000 | 138 |
| AV5Y-9C-20 | 9/16" M.P. | 0.31 | 1.00 | 6.62 | 2.50 | 1.25 | 1.62 | 3.37 | 0.50 | 1.37 | 0.34 | | 20,000 | 138 |
| AV5Y-12C-20 | 3/4" M.P. | 0.51 | 1.37 | 7.50 | 3.00 | 1.50 | 2.00 | 4.25 | 0.62 | 1.75 | 0.43 | | 20,000 | 138 |
| AV5Y-16C-20* | 1" M.P. | 0.68 | 1.75 | 9.37 | 4.12 | 2.06 | 2.56 | 5.43 | 1.12 | 2.50 | 0.56 | | 20,000 | 138 |

*Non-standard part - may require longer lead time

TV25Y — Three-way Valves, Medium Pressure (20K psi) Two Pressure Connections




| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | | |
|---------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|--------|-----|
| | | | | | | | | | | | | psi | MPa | |
| # | | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | inch | | |
| TV25Y-4C-20* | 1/4" M.P. | 0.10 | 0.75 | 5.00 | 2.00 | 1.00 | 1.43 | 2.62 | 0.37 | 1.25 | 0.21 | | 20,000 | 138 |
| TV25Y-6C-20* | 3/8" M.P. | 0.20 | 0.75 | 5.00 | 2.00 | 1.00 | 1.43 | 2.62 | 0.37 | 1.25 | 0.21 | | 20,000 | 138 |
| TV25Y-9C-20 | 9/16" M.P. | 0.31 | 1.00 | 6.87 | 2.50 | 1.25 | 1.87 | 3.62 | 0.50 | 1.37 | 0.34 | | 20,000 | 138 |
| TV25Y-12C-20* | 3/4" M.P. | 0.51 | 1.37 | 7.87 | 3.00 | 2.62 | 2.37 | 4.62 | 0.62 | 1.75 | 0.43 | | 20,000 | 138 |
| TV25Y-16C-20* | 1" M.P. | 0.68 | 1.75 | 9.75 | 4.12 | 2.12 | 3.06 | 5.87 | 1.12 | 2.50 | 0.56 | | 20,000 | 138 |

*Non-standard part - may require longer lead time

Medium Pressure Valves


TV15Y — Three-way Valves, Medium Pressure (20K psi) One Pressure Connection



| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | |
|---------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|-----|
| # | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | psi | MPa |
| TV15Y-4C-20* | 1/4" M.P. | 0.10 | 0.75 | 4.81 | 2.00 | 1.25 | 1.25 | 2.43 | 0.37 | 1.25 | 0.21 | 20,000 | 138 |
| TV15Y-6C-20* | 3/8" M.P. | 0.20 | 0.75 | 4.81 | 2.00 | 1.25 | 1.25 | 2.43 | 0.37 | 1.25 | 0.21 | 20,000 | 138 |
| TV15Y-9C-20* | 9/16" M.P. | 0.31 | 1.00 | 6.62 | 2.50 | 1.62 | 1.62 | 3.37 | 0.50 | 1.37 | 0.34 | 20,000 | 138 |
| TV15Y-12C-20* | 3/4" M.P. | 0.51 | 1.37 | 7.50 | 3.00 | 2.00 | 2.00 | 4.25 | 0.62 | 1.75 | 0.43 | 20,000 | 138 |
| TV15Y-16C-20* | 1" M.P. | 0.68 | 1.75 | 9.37 | 4.12 | 2.62 | 2.62 | 5.43 | 1.12 | 2.50 | 0.56 | 20,000 | 138 |

*Non-standard part - may require longer lead time

CV5Y — Medium Pressure Ball Check Valves




| Part Number | Connection Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| CV5Y-4C-20* | 1/4" M.P. | 3.75 | 95.25 | 1.00 | 25.40 | 20,000 | 138 |
| CV5Y-6C-20 | 3/8" M.P. | 3.75 | 95.25 | 1.00 | 25.40 | 20,000 | 138 |
| CV5Y-9C-20 | 9/16" M.P. | 0.35 | 8.89 | 1.37 | 34.80 | 20,000 | 138 |

*Non-standard part - may require longer lead time


High Pressure Valves

SV6Y — Two-way Straight Valves, High Pressure (30K/60K psi)



| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | |
|-------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|-----|
| # | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | psi | MPa |
| SV6Y-4C-30 | 1/4" H.P. | 0.09 | 1.00 | 5.18 | 2.00 | 0.62 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| SV6Y-6C-30 | 3/8" H.P. | 0.12 | 1.00 | 5.18 | 2.00 | 0.62 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| SV6Y-9C-30 | 9/16" H.P. | 0.12 | 1.50 | 5.62 | 2.62 | 1.00 | 1.43 | 2.87 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| SV6Y-4C-60 | 1/4" H.P. | 0.06 | 1.00 | 5.18 | 2.00 | 0.62 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |
| SV6Y-6C-60 | 3/8" H.P. | 0.06 | 1.00 | 5.18 | 2.00 | 0.62 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |
| SV6Y-9C-60 | 9/16" H.P. | 0.06 | 1.50 | 5.62 | 2.62 | 1.00 | 1.43 | 2.87 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |


AV6Y — Two-way Angle Valves, High Pressure (30K/60K psi)



| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | |
|-------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|-----|
| # | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | psi | MPa |
| AV6Y-4C-30 | 1/4" H.P. | 0.09 | 1.00 | 5.18 | 2.00 | 1.00 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| AV6Y-6C-30 | 3/8" H.P. | 0.12 | 1.00 | 5.56 | 2.00 | 1.00 | 1.37 | 2.81 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| AV6Y-9C-30 | 9/16" H.P. | 0.12 | 1.50 | 5.62 | 2.62 | 1.31 | 1.43 | 2.87 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| AV6Y-4C-60 | 1/4" H.P. | 0.06 | 1.00 | 5.18 | 2.00 | 1.00 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |
| AV6Y-6C-60 | 3/8" H.P. | 0.06 | 1.00 | 5.56 | 2.00 | 1.00 | 1.37 | 2.81 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |
| AV6Y-9C-60* | 9/16" H.P. | 0.06 | 1.50 | 5.62 | 2.62 | 1.31 | 1.43 | 2.87 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |

*Non-standard part - may require longer lead time

TV26Y — Three-way Valves, High Pressure (30K/60K psi) Two Pressure Connections




| Part Number | Connection Size | Orifice | Thickness | D | E | F | G | H | J | K | L | Max. Working Pressure | |
|--------------|-----------------|---------|-----------|------|------|------|------|------|------|------|------|-----------------------|-----|
| # | | | | | | | | | | | | | |
| | | | | inch | inch | inch | inch | inch | inch | inch | inch | psi | MPa |
| TV26Y-4C-30* | 1/4" H.P. | 0.09 | 1.00 | 5.18 | 2.00 | 0.62 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| TV26Y-6C-30* | 3/8" H.P. | 0.12 | 1.00 | 5.56 | 2.00 | 1.00 | 1.37 | 2.81 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| TV26Y-9C-30* | 9/16" H.P. | 0.12 | 1.50 | 6.06 | 2.62 | 1.43 | 1.87 | 3.31 | 0.50 | 1.37 | 0.21 | 30,000 | 207 |
| TV26Y-4C-60* | 1/4" H.P. | 0.06 | 1.00 | 5.18 | 2.00 | 0.62 | 1.00 | 2.43 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |
| TV26Y-6C-60* | 3/8" H.P. | 0.06 | 1.00 | 5.56 | 2.00 | 1.00 | 1.37 | 2.81 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |
| TV26Y-9C-60* | 9/16" H.P. | 0.06 | 1.50 | 6.06 | 2.62 | 1.43 | 1.87 | 2.87 | 0.50 | 1.37 | 0.21 | 60,000 | 414 |

*Non-standard part - may require longer lead time

High Pressure Valves


TV16Y — Three-way Valves, High Pressure (30K/60K psi) One Pressure Connection



| Part Number | Connection Size | Orifice | Thickness | D | | E | | F | | G | | H | | J | | K | | L | | Max. Working Pressure | |
|--------------|-----------------|---------|-----------|------|--------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|------|-----------------------|-----|
| | | | | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | | | | | | | | | | | | | | | |
| TV16Y-4C-30* | 1/4" H.P. | 0.09 | 1.00 | 5.18 | 131.76 | 2.00 | 50.80 | 1.00 | 25.40 | 1.00 | 25.40 | 2.43 | 61.70 | 0.50 | 12.70 | 1.37 | 34.70 | 0.21 | 5.33 | 30,000 | 207 |
| TV16Y-6C-30* | 3/8" H.P. | 0.12 | 1.00 | 5.56 | 141.26 | 2.00 | 50.80 | 2.00 | 50.80 | 1.43 | 36.33 | 2.81 | 71.38 | 0.50 | 12.70 | 1.37 | 34.70 | 0.21 | 5.33 | 30,000 | 207 |
| TV16Y-9C-30* | 9/16" H.P. | 0.12 | 1.50 | 5.62 | 142.70 | 2.62 | 66.68 | 2.18 | 55.33 | 1.43 | 36.33 | 2.87 | 72.90 | 0.50 | 12.70 | 1.37 | 34.70 | 0.21 | 5.33 | 30,000 | 207 |
| TV16Y-4C-60* | 1/4" H.P. | 0.06 | 1.00 | 5.18 | 131.76 | 2.00 | 50.80 | 1.00 | 25.40 | 1.00 | 25.40 | 2.43 | 61.70 | 0.50 | 12.70 | 1.37 | 34.70 | 0.21 | 5.33 | 60,000 | 414 |
| TV16Y-6C-60 | 3/8" H.P. | 0.06 | 1.00 | 5.56 | 141.26 | 2.00 | 50.80 | 2.00 | 50.80 | 1.43 | 36.33 | 2.81 | 71.38 | 0.50 | 12.70 | 1.37 | 34.70 | 0.21 | 5.33 | 60,000 | 414 |
| TV16Y-9C-60* | 9/16" H.P. | 0.06 | 1.50 | 5.62 | 142.70 | 2.62 | 66.68 | 2.18 | 55.33 | 1.43 | 36.33 | 2.87 | 72.90 | 0.50 | 12.70 | 1.37 | 34.70 | 0.21 | 5.33 | 60,000 | 414 |

*Non-standard part - may require longer lead time

CV6Y— High Pressure Ball Check Valves



| Part Number | Connection Size | A Overall Length | | H Hex | | Max. Working Pressure | |
|-------------|-----------------|------------------|--------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| CV6Y-4C-60 | 1/4" H.P. | 4.18 | 106.17 | 1.50 | 38.10 | 60,000 | 414 |
| CV6Y-6C-60* | 3/8" H.P. | 4.25 | 107.95 | 1.50 | 38.10 | 60,000 | 414 |
| CV6Y-9C-60 | 9/16" H.P. | 4.62 | 117.35 | 1.56 | 39.62 | 60,000 | 414 |

*Non-standard part - may require longer lead time

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

Quick Couplings

Rogan Series Couplings

C-Series Hydraulic Couplings



Table of Contents

Hose
A

Introduction

| | |
|-----------------------------------|-----|
| Quick Coupling Nomenclature | D-2 |
|-----------------------------------|-----|

Quick Couplings

| | |
|------------------------------------|------|
| Rogan Series | D-4 |
| HP006 Coupler | D-5 |
| HP006 Nipple w/o Check Valve | D-6 |
| HP006 Nipple w/ Check Valve | D-7 |
| HP010 Coupler | D-8 |
| HP010 Nipple w/o Check Valve | D-9 |
| HP010 Nipple w/ Check Valve | D-10 |
| C Series | D-11 |
| 115 Coupler | D-12 |
| 115 Nipple | D-13 |
| 116 Coupler | D-14 |
| 116 Nipple | C-15 |
| 125 Coupler | D-16 |
| 125 Nipple | D-16 |
| Quick Coupling Adapters | D-17 |

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Quick Coupling Nomenclature

Quick Coupling Part Numbers

The part number description given to the Rogan Series (Walther Quick Couplings) is as follows:

Example: HP006-0-NMC

- HP006**-0-NMC – **Thru Hole Size** (HP006 = .24", or 6mm, nominal thru hole diameter)
- HP006-**0**-NMC – **Component Type** (0 = Female coupler with check valve)
- HP006-0-**NMC** – **Connection Type** (N = NPT)
- HP006-0-N**MC** – **Connection Gender** (M = Male)
- HP006-0-NMC – **Connection Size** (C = 3/8" NPT)

| Thru Hole Size | |
|----------------|---|
| HP006 | .24", or 6mm , nominal thru hole diameter |
| HP010 | .40", or 10mm , nominal thru hole diameter |

| Component Type | |
|----------------|--|
| 0 | Female coupler with check valve |
| 1 | Male nipple w/o check valve (straight through) |
| 2 | Male nipple with check valve |

| Thread Form | | | | | |
|-----------------|---------------------|-------------------|--------|-----------------|----------|
| Connection Type | | Connection Gender | | Connection Size | |
| H | High Pressure | M | Male | 4 | 1/4" |
| L | Medium Pressure | F | Female | 6 | 3/8" |
| A | Type "M" | | | 9 | 9/16" |
| N | NPT | | | 12 | 3/4" |
| X | Low Angle Face Seal | | | 16 | 1" |
| | | | | B | 1/4" NPT |
| | | | | C | 3/8" NPT |
| | | | | D | 1/2" NPT |

For detailed ordering information, please consult price list or contact Parflex Division.

Quick Coupling Nomenclature

Quick Coupling Part Numbers

The part number description given to the C Series couplings* is as follows:

Example: C10-116-1202

| | |
|---|---|
| C10 -116-1202 – Part Type | (C10 = Coupling Component) |
| C10- 116 -1202 – Series | (116 = Max. Working Pressure of 21,760 psi) |
| C10-116- 1 202 – Component Type | (1 = Coupler) |
| C10-116-12 0 2 – Connection | (2 = BSP) |
| C10-116-120 0 2 – Gender | (0 = Female) |
| C10-116-1202 – Size | (2 = 1/4") |

| Part Type | |
|------------|--------------------|
| C10 | Coupling component |
| C19 | Adapter |

| Series | |
|------------|--|
| 115 | Working pressure of 14,500 psi (100 MPa) |
| 116 | Working pressure of 21,760 psi (150 MPa) |
| 125 | Working pressure of 29,000 psi (200 MPa) |
| 950 | Adapters only - Working pressures up to 43,500 psi (300 MPa) |

| Part Type - Couplings only, not applicable to adapters | |
|--|------------------------|
| 1 | Coupler |
| 6 | Nipple |
| 5 | Nipple w/o Check Valve |

| Thread Form - Couplings only, not applicable to adapters | | | | | |
|--|-----|-------------------|-----------------------------------|-----------------|------|
| Connection Type | | Connection Gender | | Connection Size | |
| 2 | BSP | 5 | Male | 1 | 1/8" |
| 4 | NPT | 0 | Female | 2 | 1/4" |
| | | 2 | Female w/ built-in locking device | 4 | 3/8" |

*This description is for couplings only. The part numbers for quick coupling adapters will deviate from this structure.

Rogan Series



Rogan series quick couplings are versatile connecting devices that permit easy and rapid joining of hose assemblies to your system. Each coupling is assembled and pressure tested to at least 5,000 psi above its maximum rated working pressure. Couplings with check-valves can withstand the full working pressure in the disconnected condition. The standard seal material is Nitrile, however, Viton, EPDM and FFKM are also available.

| Type | Max. Working Pressure (psi) | Test Pressure (psi) | Nominal Thru Hole Diameter (in) |
|-------|-----------------------------|---------------------|---------------------------------|
| HP006 | 30,000 | 35,000 | 0.24 |
| HP010 | 20,000 | 25,000 | 0.40 |

Note: The choice of the threaded end form may limit the working pressure and the size of the thru hole in the coupling. Call **polyflex** for additional information.


For detailed ordering information, please consult price list or contact Parflex Division.



| | |
|-------------------|---|
| Hose | A |
| Fittings | B |
| Adapters & Valves | C |
| Quick Couplings | D |
| Accessories | E |
| General Technical | F |

Rogan Series Quick Couplings

HP006 Couplers — Visual Index

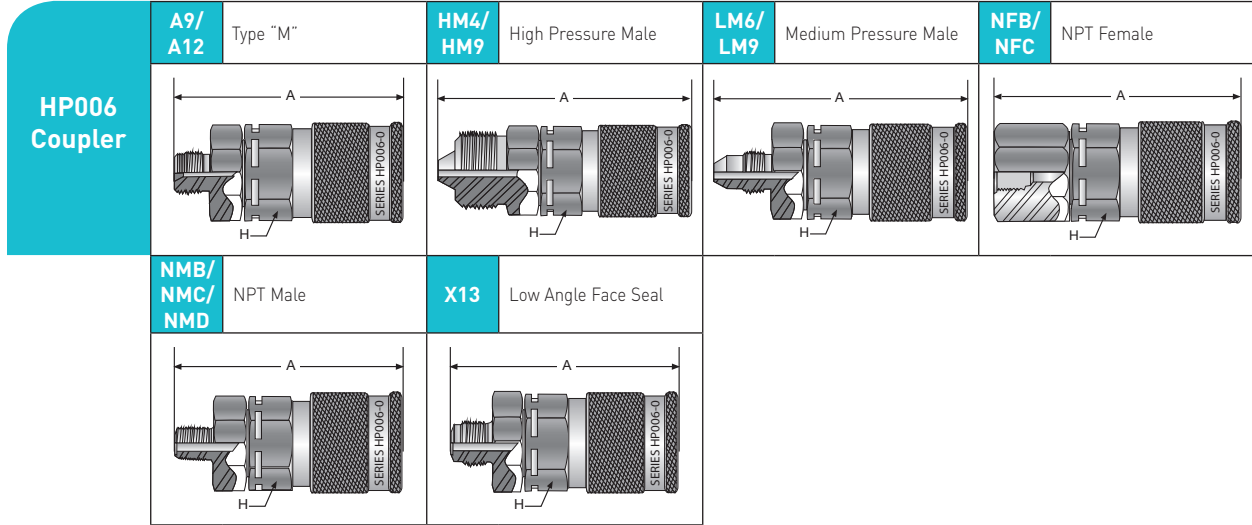


HP006 Coupler

| Part Number | Thread Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|---------------------------|----------------------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| HP006-0-A9 | Type "M" (9/16" - 18) | 3.30 | 83.82 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-0-A12 | Type "M" (3/4" - 16) | 3.34 | 84.84 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-0-HM4 | 1/4" High Pressure Male | 3.46 | 87.88 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-0-HM9 | 9/16" High Pressure Male | 3.70 | 93.98 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-0-LM6 | 3/8" Medium Pressure Male | 3.54 | 89.92 | 1.19 | 30.23 | 20,000 | 138 |
| HP006-0-NFB | 1/4" NPT Female | 3.30 | 83.82 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-0-NFC | 3/8" NPT Female | 3.30 | 83.82 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-0-NMB | 1/4" NPT Male | 3.40 | 86.36 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-0-NMC | 3/8" NPT Male | 3.30 | 83.82 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-0-NMD | 1/2" NPT Male | 3.45 | 87.63 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-0-X13 | Low Angle Face Seal (9/16" - 18) | 3.37 | 85.60 | 1.19 | 30.23 | 30,000 | 207 |
| Construction: Alloy steel | | | | | | | |

Rogan Series Quick Couplings

HP006 Nipple w/o Check Valve — Visual Index

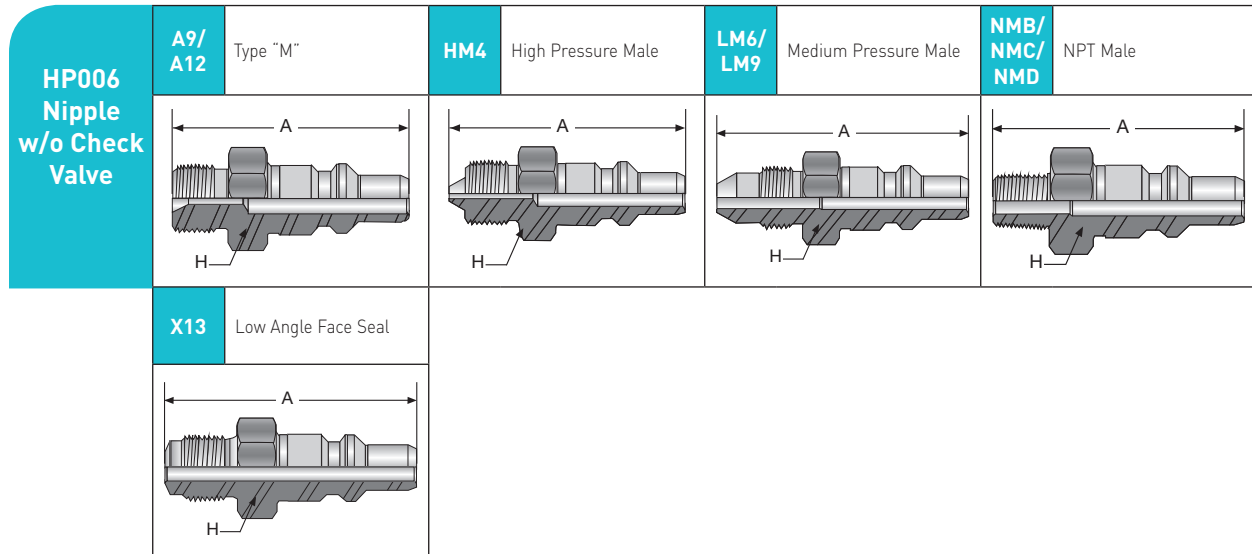


HP006 Nipple w/o Check Valve

| Part Number | Thread Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|---------------------------|----------------------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| HP006-1-A9 | Type "M" (9/16" - 18) | 1.98 | 50.29 | 0.75 | 19.05 | 30,000 | 207 |
| HP006-1-A12 | Type "M" (3/4" - 16) | 2.16 | 54.86 | 0.87 | 22.10 | 30,000 | 207 |
| HP006-1-HM4 | 1/4" High Pressure Male | 2.25 | 57.15 | 0.75 | 19.05 | 30,000 | 207 |
| HP006-1-LM6 | 3/8" Medium Pressure Male | 2.33 | 59.18 | 0.75 | 19.05 | 20,000 | 138 |
| HP006-1-LM9 | 9/16" Medium Pressure Male | 2.57 | 65.28 | 1.00 | 25.40 | 20,000 | 138 |
| HP006-1-NMB | 1/4" NPT Male | 2.09 | 53.09 | 0.75 | 19.05 | 15,000 | 103 |
| HP006-1-NMC | 3/8" NPT Male | 2.13 | 54.10 | 0.75 | 19.05 | 15,000 | 103 |
| HP006-1-NMD | 1/2" NPT Male | 2.31 | 58.67 | 1.00 | 25.40 | 15,000 | 103 |
| HP006-1-X13 | Low Angle Face Seal (9/16" - 18) | 2.17 | 55.12 | 0.75 | 19.05 | 30,000 | 207 |
| Construction: Alloy steel | | | | | | | |

For detailed ordering information, please consult price list or contact Parflex Division.

Rogan Series Quick Couplings

HP006 Nipple w/ Check Valve — Visual Index

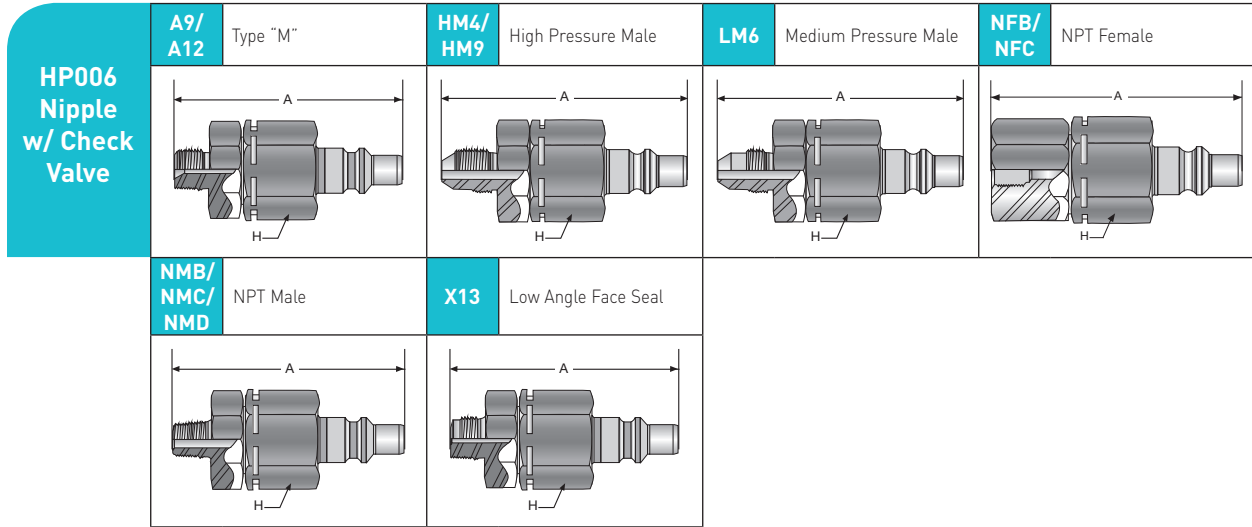


HP006 Nipple w/ Check Valve

| Part Number | Thread Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|---------------------------|----------------------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| HP006-2-A9 | Type "M" (9/16" - 18) | 3.28 | 83.31 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-2-A12 | Type "M" (3/4" - 16) | 3.30 | 83.82 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-2-HM4 | 1/4" High Pressure Male | 3.45 | 87.63 | 1.19 | 30.23 | 30,000 | 207 |
| HP006-2-LM6 | 3/8" Medium Pressure Male | 3.52 | 89.41 | 1.19 | 30.23 | 20,000 | 138 |
| HP006-2-NFB | 1/4" NPT Female | 3.26 | 82.80 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-2-NFC | 3/8" NPT Female | 3.25 | 82.55 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-2-NMB | 1/4" NPT Male | 3.34 | 84.84 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-2-NMC | 3/8" NPT Male | 3.34 | 84.84 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-2-NMD | 1/2" NPT Male | 3.43 | 87.12 | 1.19 | 30.23 | 15,000 | 103 |
| HP006-2-X13 | Low Angle Face Seal (9/16" - 18) | 3.35 | 85.09 | 1.19 | 30.23 | 30,000 | 207 |
| Construction: Alloy steel | | | | | | | |

Rogan Series Quick Couplings

HP010 Coupler — Visual Index

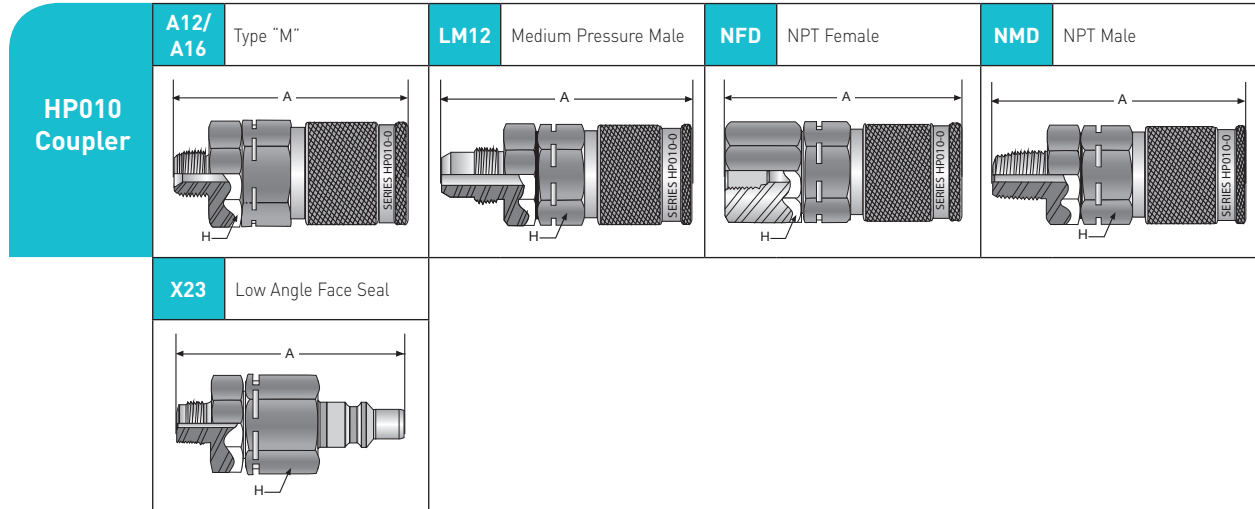

HP010 Coupler


| Part Number | Thread Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|---------------------------------|------------------|--------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| HP010-0-A12 | Type "M" (3/4" - 16) | 4.00 | 101.60 | 1.62 | 41.15 | 20,000 | 138 |
| HP010-0-A16 | Type "M" (1" - 12) | 4.10 | 104.14 | 1.62 | 41.15 | 20,000 | 138 |
| HP010-0-LM12 | 3/4" Medium Pressure Male | 4.64 | 117.86 | 1.62 | 41.15 | 20,000 | 138 |
| HP010-0-NFD | 1/2" NPT Female | 4.27 | 108.46 | 1.62 | 41.15 | 15,000 | 103 |
| HP010-0-NMD | 1/2" NPT Male | 4.13 | 104.90 | 1.62 | 41.15 | 15,000 | 103 |
| HP010-0-X23 | Low Angle Face Seal (3/4" - 16) | 4.19 | 106.43 | 1.62 | 41.15 | 20,000 | 138 |

Construction: Alloy steel

For detailed ordering information, please consult price list or contact Parflex Division.

Rogan Series Quick Couplings

HP010 Nipple w/o Check Valve — Visual Index

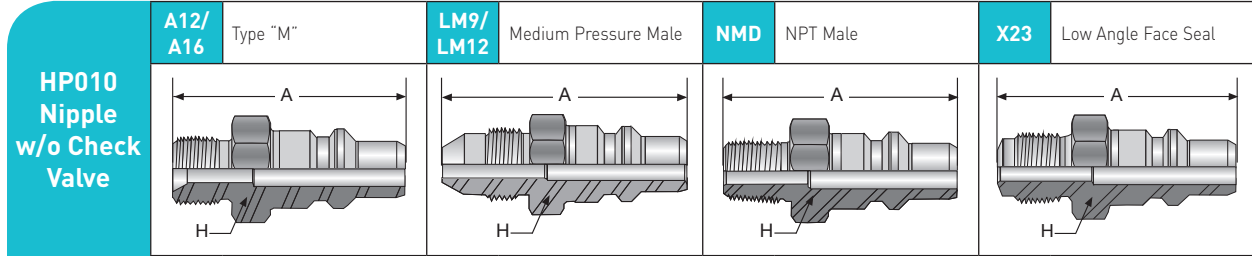


HP010 Nipple w/o Check Valve

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|---------------------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| HP010-1-A12 | Type "M" (3/4" - 16) | 2.40 | 60.96 | 1.06 | 26.92 | 20,000 | 138 |
| HP010-1-A16 | Type "M" (1" - 12) | 2.53 | 64.26 | 1.18 | 29.97 | 20,000 | 138 |
| HP010-1-LM9 | 9/16" Medium Pressure Male | 3.12 | 79.25 | 1.18 | 29.97 | 20,000 | 138 |
| HP010-1-LM12 | 3/4" Medium Pressure Male | 2.84 | 72.14 | 1.06 | 26.92 | 20,000 | 138 |
| HP010-1-NMD | 1/2" NPT Male | 2.52 | 64.01 | 1.06 | 26.92 | 15,000 | 103 |
| HP010-1-X23 | Low Angle Face Seal (3/4" - 16) | 2.58 | 65.53 | 1.06 | 26.92 | 20,000 | 138 |




Construction: Alloy steel

Rogan Series Quick Couplings

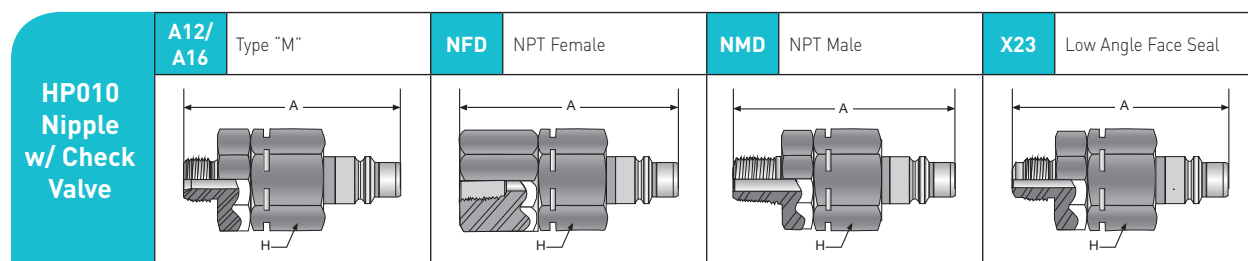HP010 Nipple w/ Check Valve — Visual Index



HP010 Nipple w/ Check Valve

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|---------------------------|---|------------------|--------|---|-------|---|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # |  | | |  | |  | |
| HP010-2-A12 | Type "M" (3/4" - 16) | 4.00 | 101.60 | 1.62 | 41.15 | 20,000 | 138 |
| HP010-2-A16 | Type "M" (1" - 12) | 4.08 | 103.63 | 1.62 | 41.15 | 20,000 | 138 |
| HP010-2-NFD | 1/2" NPT Female | 4.14 | 105.16 | 1.62 | 41.15 | 15,000 | 103 |
| HP010-2-NMD | 1/2" NPT Male | 4.13 | 104.90 | 1.62 | 41.15 | 15,000 | 103 |
| HP010-2-X23 | Low Angle Face Seal (3/4" - 16) | 4.18 | 106.17 | 1.62 | 41.15 | 20,000 | 138 |
| Construction: Alloy steel | | | | | | | |

C Series



Features:

- Working pressures up to 29,000 psi
- Non-drip valving for clean, safe, trouble-free performance and minimal air inclusion
- Built-in safety locking device to prevent accidental disconnect
- Wide range of threaded styles: NPT, BSP and “High Pressure”
- Adapters for ease of connection to high pressure hoses and fixed ports
- Thread sizes from 1/8" to 3/8"
- Protective dust caps are included to prevent damage and fluid contamination in disconnected position
- Rugged design and construction for long life in demanding applications

Applications:


- Torque Tensioning
- Stud Tensioning
- Rescue
- Bearing Pullers
- Intensifiers
- Hydrostatic Testing
- Pumps
- Jacks
- Spreaders
- Cable Cutters
- Nut Splitters
- Pipe Coupling Swagers
- Presses
- Clamping Fictures
- Crimpers
- Blow-out Preventors

| Type | Max. Working Pressure (psi) | Test Pressure (psi) | Nominal Thru Hold Diameter (in) |
|--------------|-----------------------------|---------------------|---------------------------------|
| C Series 115 | 14,500 | 21,800 | 0.11 |
| C Series 116 | 21,800 | 29,200 | 0.11 |
| C Series 125 | 29,800 | 36,300 | 0.11 |

Note: The choice of the threaded end form may limit the working pressure and the size of the thru hole in the coupling. Call **polyflex** for additional information.

C Series Quick Couplings

115 Coupler — Visual Index

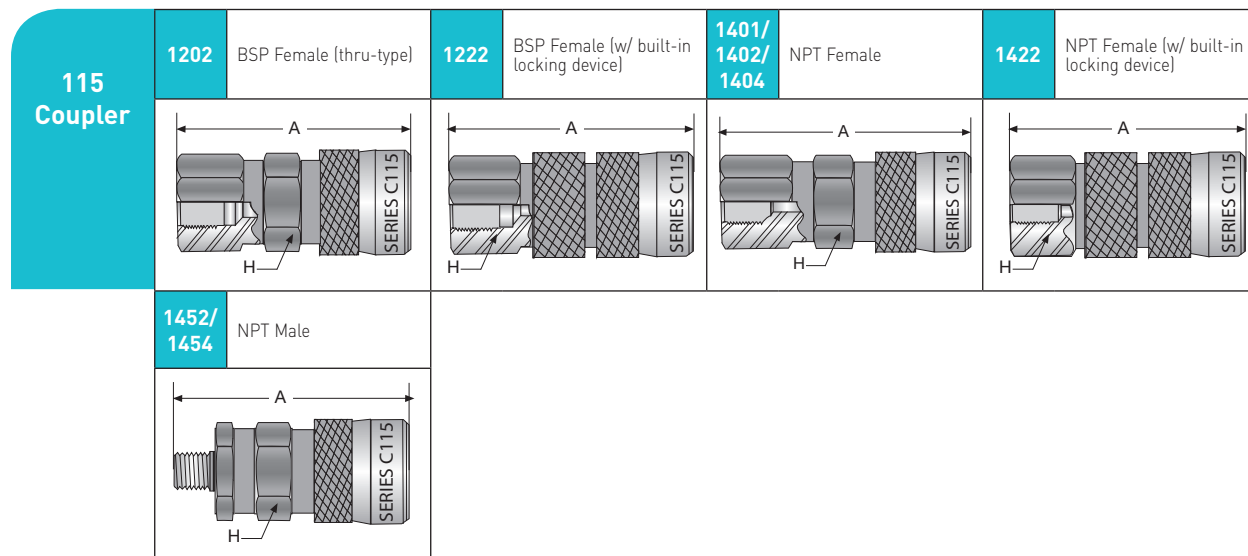

115 Coupler


| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|--|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| C10-115-1202 | 1/4" BSP Female (thru type) | 2.30 | 58.42 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1222 | 1/4" BSP Female (with built-in locking device) | 2.30 | 58.42 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1401 | 1/8" NPT Female | 2.30 | 58.42 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1402 | 1/4" NPT Female | 2.30 | 58.42 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1404 | 3/8" NPT Female | 2.38 | 60.45 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1422 | 1/4" NPT Female (with built-in locking device) | 2.30 | 58.42 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1452 | 1/4" NPT Male | 2.45 | 62.23 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-1454 | 3/8" NPT Male | 2.45 | 62.23 | 0.94 | 23.88 | 14,500 | 100 |

Construction: All exposed components are made of zinc-plated steel.

For detailed ordering information, please consult price list or contact Parflex Division.

C Series Quick Couplings

115 Nipple — Visual Index

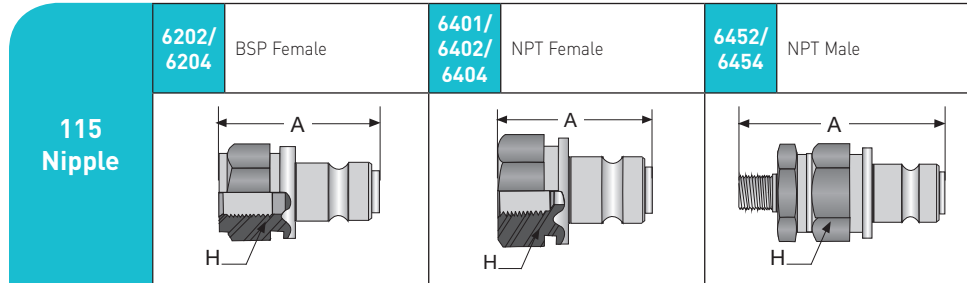


115 Nipple

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| C10-115-6202 | 1/4" BSP Female | 1.47 | 37.34 | 0.87 | 22.10 | 14,500 | 100 |
| C10-115-6204 | 3/8" BSP Female | 1.56 | 39.62 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-6401 | 1/8" NPT Female | 1.42 | 36.07 | 0.87 | 22.10 | 14,500 | 100 |
| C10-115-6402 | 1/4" NPT Female | 1.42 | 36.07 | 0.87 | 22.10 | 14,500 | 100 |
| C10-115-6404 | 3/8" NPT Female | 1.46 | 37.08 | 0.94 | 23.88 | 14,500 | 100 |
| C10-115-6452 | 1/4" NPT Male | 2.40 | 60.96 | 0.87 | 22.10 | 14,500 | 100 |
| C10-115-6454 | 3/8" NPT Male | 2.55 | 64.77 | 0.94 | 23.88 | 14,500 | 100 |

Construction: All exposed components are made of zinc-plated steel.

C Series Quick Couplings

116 Coupler — Visual Index

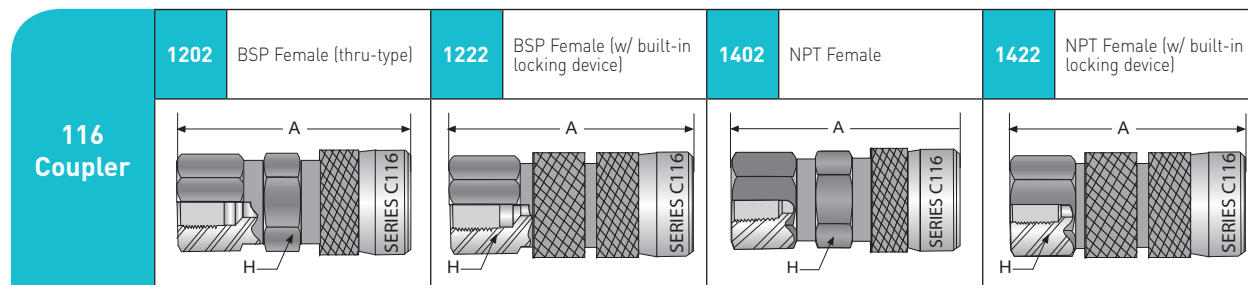


116 Coupler

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|--|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| C10-116-1202 | 1/4" BSP Female | 2.30 | 58.42 | 0.94 | 23.88 | 21,750 | 150 |
| C10-116-1222 | 1/4" BSP Female (with built-in locking device) | 2.30 | 58.42 | 0.94 | 23.88 | 21,750 | 150 |
| C10-116-1402 | 1/4" NPT Female | 2.30 | 58.42 | 0.94 | 23.88 | 21,750 | 150 |
| C10-116-1422 | 1/4" NPT Female (with built-in locking device) | 2.30 | 58.42 | 0.94 | 23.88 | 21,750 | 150 |




Construction: All exposed components are made of zinc-plated steel.

C Series Quick Couplings

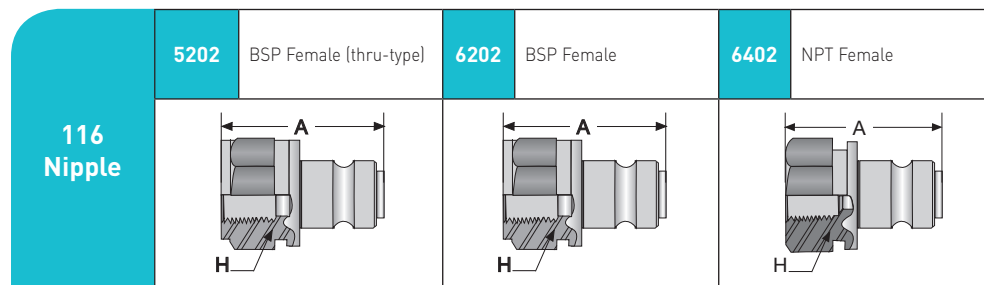116 Nipple — Visual Index




116 Nipple

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|---|------------------|-------|---|-------|---|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # |  | | |  | |  | |
| C10-116-5202 | 1/4" BSP Female (thru type) | 1.47 | 37.34 | 0.87 | 22.10 | 21,750 | 150 |
| C10-116-6202 | 1/4" BSP Female | 1.47 | 37.34 | 0.87 | 22.10 | 21,750 | 150 |
| C10-116-6402 | 1/4" NPT Female | 1.41 | 35.81 | 0.87 | 22.10 | 21,750 | 150 |

Construction: All exposed components are made of zinc-plated steel.

C Series Quick Couplings

125 Coupler and 125 Nipple — Visual Index

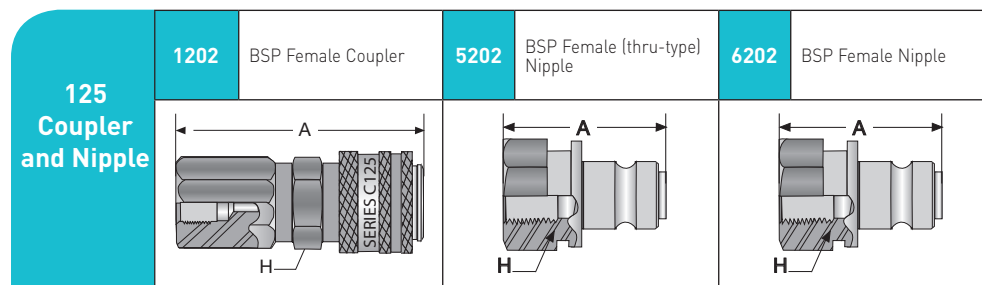

125 Coupler

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|-----------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| C10-125-1202 | 1/4" BSP Female | 2.65 | 67.31 | 0.94 | 23.88 | 29,000 | 200 |

Construction: All exposed components are made of zinc-plated steel.











125 Nipple

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|-----------------------------|------------------|-------|-------|-------|-----------------------|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # | | | | | | | |
| C10-125-5202 | 1/4" BSP Female (thru type) | 1.50 | 38.10 | 0.87 | 22.10 | 29,000 | 200 |
| C10-125-6202 | 1/4" BSP Female | 1.50 | 38.10 | 0.87 | 22.10 | 29,000 | 200 |




Construction: All exposed components are made of zinc-plated steel.

C Series Quick Couplings

Quick Coupling Adapters — Visual Index

| | | | | |
|-------------------------|--|--|--|---|
| Quick Coupling Adapters | 1680 BSP 120° external cone x H.P. Male | 0029 BSP 120° external cone x UNF Hose | 0062/0064 Rubber Metal Seal | 1600 BSP 120° external cone Blind Plug |
| |  |  |  |  |
| | 1601 BSP x BSP 120° external cone | 1602 BSP 120° external cone x BSP 60° internal cone | 1622 BSP x BSP with 60° internal cone | 1623 NPT Male x BSP with 60° internal cone |
| |  |  |  |  |
| | 1680 Porting Block | HAHM BSP with 60° internal cone x H.P. Male | | |
| |  |  | | |

Quick Coupling Adapters

| Part Number | Connection Type | A Overall Length | | H Hex | | Max. Working Pressure | |
|--------------|---|------------------|-------|---|-------|---|-----|
| | | inch | mm | inch | mm | psi | MPa |
| # |  | | |  | |  | |
| C09-125-1680 | 1/4" BSP 120° external cone x 1/4" HP Male | 1.72 | 43.69 | 0.67 | 17.02 | 29,000 | 200 |
| C19-950-0029 | 1/4" BSP 120° external cone x 9/16" UNF | 1.48 | 37.59 | 0.67 | 17.02 | 29,000 | 200 |
| C19-950-0062 | 1/4" Rubber Metal Seal | 0.08 | 2.03 | 0.81 | 20.57 | 14,500 | 100 |
| C19-950-0064 | 3/8" Rubber Metal Seal | 0.08 | 2.03 | 0.94 | 23.88 | 14,500 | 100 |
| C19-950-1600 | 1/4" BSP 120° external cone Blind Plug | 1.07 | 27.18 | 0.67 | 17.02 | 29,000 | 200 |
| C19-950-1601 | 1/4" BSP x 1/4" BSP 120° external cones | 1.76 | 44.70 | 0.08 | 2.03 | 29,000 | 200 |
| C19-950-1602 | 1/4" BSP 120° external cone x 1/4" BSP 60° internal cone | 1.54 | 39.12 | 0.83 | 21.08 | 29,000 | 200 |
| C19-950-1622 | 1/4" BSP x 1/4" BSP with 60° internal cone | 1.25 | 31.75 | 0.83 | 21.08 | 29,000 | 200 |
| C19-950-1623 | 1/4" NPT Male x 1/4" BSP with 60° internal cone | 1.27 | 32.26 | 0.83 | 21.08 | 14,500 | 100 |
| C19-950-1680 | Porting Block | 1.8 | 45.72 | N/A | N/A | 29,000 | 200 |
| HAHM4BM4 | 1/4" BSP with 60° internal cone x 1/4" HP Male | 1.47 | 37.34 | 0.83 | 21.08 | 30,000 | 207 |

Construction: All C19 part numbers are manufactured with black zinc-plated steel.

Accessories



Heavy Duty Abrasion Covers

Spring Guards

Containment and Support Grips

Bend Restrictors

Pressure Containment Shields

Anti-Gall Lubricant

Dies

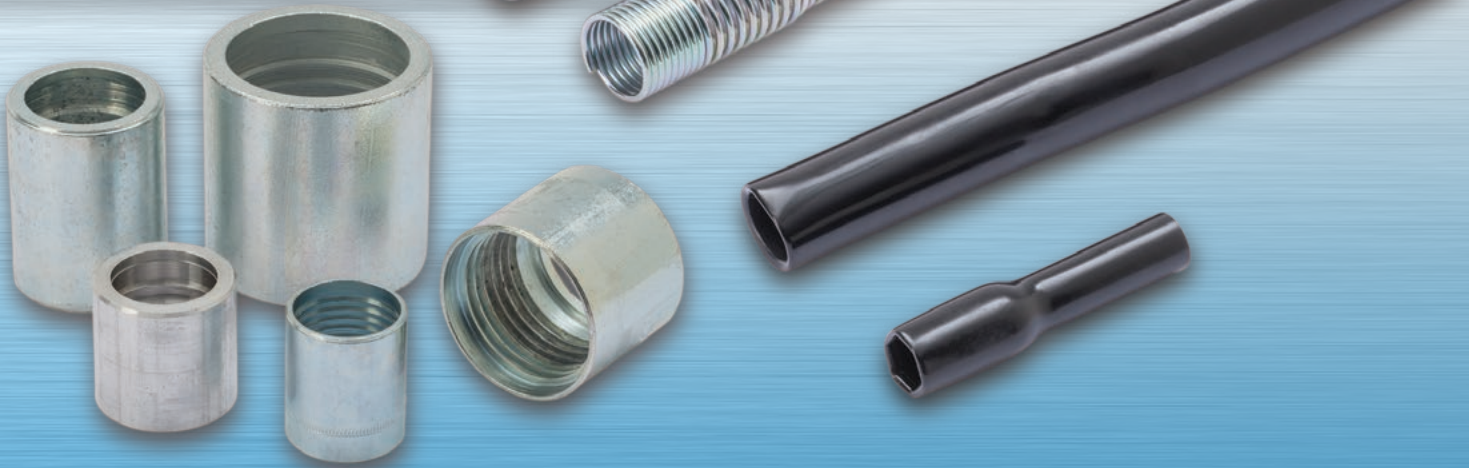


Table of Contents

Hose
A

Fittings
B

Accessories

| | |
|--|-----|
| Heavy Duty Abrasion Cover | E-2 |
| Heavy Duty Abrasion Cover Sleeves..... | E-2 |
| Spring Guards | E-2 |
| Bend Restrictors..... | E-2 |
| Containment Grips | E-3 |
| Support Grips..... | E-3 |
| Dies | E-3 |
| Warning Tags..... | E-3 |
| Pressure Containment Shield..... | E-4 |
| Anti-Gall Lubricant | E-4 |

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F



Accessories

Heavy Duty Abrasion Cover and Cover Sleeves



| Part Number | Size I.D. (inch) | Size O.D. (inch) | Material | Reinforcement | Bend Radius (inch) | Weight (lbs/ft) | Cover Sleeves | Cover Sleeve Material |
|----------------|------------------|------------------|-------------|------------------|--------------------|-----------------|--------------------------|-----------------------|
| MHDC010 | 5/8 | 0.820 | Clear Vinyl | Fiber Braid | 3.0 | 0.15 | 508-J-500-10 | Carbon Steel |
| MHDC012 | 3/4 | 0.938 | Clear Vinyl | White PVC Helix | 3.0 | 0.20 | 510-A-500-12 | Aluminum |
| MHDC016 | 1 | 1.250 | Clear Vinyl | White PVC Helix | 3.0 | 0.27 | 216-200-18 | Carbon Steel |
| MHDC018 | 1-1/8 | 1.350 | Clear Vinyl | White PVC Helix | 3.5 | 0.29 | 216-200-18 | Carbon Steel |
| | | | | | | | 620-100-18 (w/ 2640N-08) | Aluminum |
| MHDC024 | 1-1/2 | 1.825 | Clear Vinyl | White PVC Helix | 4.0 | 0.40 | 220-200-22 | Carbon Steel |
| MHDC026 | 1-5/8 | 1.905 | Clear Vinyl | White PVC Helix | 4.0 | 0.52 | 520-A-500-26 | Aluminum |
| PVC-BLUE-012 | 3/4 | 0.938 | Clear Vinyl | Blue PVC Helix | 3.0 | 0.20 | 510-A-500-12 | Aluminum |
| PVC-BLUE-016 | 1 | 1.250 | Clear Vinyl | Blue PVC Helix | 3.0 | 0.27 | 216-200-18 | Carbon Steel |
| PVC-BLUE-018 | 1-1/8 | 1.375 | Clear Vinyl | Blue PVC Helix | 3.0 | 0.29 | 216-200-18 | Carbon Steel |
| PVC-BLUE-024 | 1-1/2 | 1.780 | Clear Vinyl | Blue PVC Helix | 5.0 | 0.40 | 220-200-22 | Carbon Steel |
| PVC-ORANGE-012 | 3/4 | 0.938 | Clear Vinyl | Orange PVC Helix | 3.0 | 0.20 | 510-A-500-12 | Aluminum |
| PVC-ORANGE-016 | 1 | 1.250 | Clear Vinyl | Orange PVC Helix | 3.0 | 0.27 | 216-200-18 | Carbon Steel |

Spring Guards



| Part Number | Size (I.D.) | Size (O.D.) | Length (in) | Material | Designated Hose Series |
|-------------|-------------|-------------|-------------|-----------------|------------------------|
| MSG060 | 0.61 | 0.77 | 300.00 | Stainless Steel | 2440N-04 |
| MSG2006 | 0.61 | 0.77 | 6.30 | Carbon Steel | 2245N-04 |
| MSG2106 | 0.63 | 0.89 | 7.87 | Carbon Steel | 2380N-04 |
| MSG4113 | 0.90 | 1.27 | 18.00 | Carbon Steel | -08 Hose Sizes |
| MSG4120 | 1.45 | 1.89 | 20.00 | Stainless Steel | 2440N-12 |
| MSG4125 | 1.21 | 1.65 | 18.00 | Stainless Steel | 2440N-16 |

Bend Restrictors



| Part Number | I.D. (inch) | O.D. (inch) | Length (inch) | Material |
|-------------|-------------|-------------|---------------|--------------|
| MBR003 | 0.250" | 0.515" | 2.33 | Molded Vinyl |
| MBR004 | 0.250" | 0.490" | 2.16 | Molded Vinyl |
| MBR008 | 0.500" | 0.800" | 6.00 | Molded Vinyl |
| MBR010 | 0.625" | 0.925" | 6.00 | Molded Vinyl |
| MBR012 | 0.770" | 1.070" | 6.00 | Molded Vinyl |

For detailed ordering information, please consult price list or contact Parflex Division.

Accessories

Containment Grips



| Part Number | Loop Size (inch) | Overall Length (inch) | Material | Breaking Strength (lbs) | Hose Size (O.D.) | Weight (lbs) |
|--------------|------------------|-----------------------|------------------|-------------------------|-----------------------------|--------------|
| MCG001SS | 1 | 25.5 | Stainless Steel | 2,900 | 0.38" - 0.69" | 0.55 |
| MCG002SS | 2 | 37.5 | Stainless Steel | 9,400 | 1.00" - 1.56" | 2.20 |
| MCG003SS | 1.26 | 65 | Stainless Steel | 14,400 | 1.25" - 1.94" | 6.50 |
| MCGHS10-15 | 0.71 | 26.18 | Galvanized Steel | 2,293 | 0.40" - 0.59" | 0.15 |
| MCGHS15-20 | 0.71 | 27.17 | Galvanized Steel | 2,900 | 0.59" - 0.79" | 0.33 |
| MCGHS20-30 | 0.71 | 26.97 | Galvanized Steel | 5,463 | 0.79" - 1.18" | 0.40 |
| MCGHS30-40 | 0.71 | 27.56 | Galvanized Steel | 7,891 | 1.18" - 1.57" | 0.68 |
| MCGHS40-50 | 0.71 | 28.54 | Galvanized Steel | 10,791 | 1.57" - 1.96" | 1.04 |
| MCGHS50-60 | 0.71 | 33.46 | Galvanized Steel | 10,791 | 1.96" - 2.36" | 1.81 |
| MCGHS3295-SS | 4.50 | 81.50 | Stainless Steel | 49,000 | 1-1/2" and 2" (Black Eagle) | 9.5 |

Support Grips



| Part Number | Loop Size (inch) | Overall Length (inch) | Material | Breaking Strength (lbs) | Hose Size (O.D.) | Weight (lbs) |
|--------------|------------------|-----------------------|---------------------|-------------------------|------------------|--------------|
| MK022-03-038 | 4 | 9 | Tin - Coated Bronze | 750 | 0.63" - 0.74" | 0.50 |
| MK022-03-039 | 4 | 10 | Tin - Coated Bronze | 950 | 0.75" - 0.99" | 0.25 |
| MK022-03-041 | 5 | 12 | Tin - Coated Bronze | 1,500 | 1.00" - 1.24" | 0.35 |
| MK022-03-042 | 5 | 14 | Tin - Coated Bronze | 1,500 | 1.25" - 1.49" | 0.40 |
| MK022-03-043 | 5 | 15 | Tin - Coated Bronze | 1,500 | 1.50" - 1.74" | 0.45 |
| MK022-03-045 | 9 | 19 | Tin - Coated Bronze | 3,100 | 2.25" - 2.49" | 1.25 |

Dies



| Part Number | Description | Fitting Series |
|-------------|-----------------------|----------------|
| # | | |
| 80C-HP3 | Dies for HP3 Fittings | HP |
| 80C-HP4 | Dies for HP4 Fittings | HP |
| 80C-HP6 | Dies for HP6 Fittings | HP |
| 80C-G03 | Dies for HP3 Guards | N/A |
| 80C-G04 | Dies for HP4 Guards | N/A |
| 80C-G06 | Dies for HP6 Guards | N/A |
| 83C-8X16 | 2380N-16 | 8X |
| 83C-9X04 | 2390N-04 | 9X |
| 83C-9X08 | 2390N-08 | 9X |
| 83C-9X16 | 2390N-16 | 9X |
| 83C-F08W | 57CR-08 | CR |
| 83C-F16W | 57CR-16 | CR |

Warning Tags



| Part Number | Description |
|-------------|--|
| G214-240 | White - General warning tag should be applied to all hoses |
| G214-245 | Yellow - Warning tag for flex lances |

Accessories

Pressure Containment Shield



| Part Number | I.D. (inch) | O.D. (inch) | Retaining Sleeve | Stiffener | Material | Bend Radius (in) | Weight (lbs/ft) | Designated Hose Series |
|-------------|-------------|-------------|------------------|-------------------------------------|----------|------------------|-----------------|-----------------------------|
| MHBS012 | 0.75 | 1.07 | 412-400 | M55STIF-4 M55STIF-5 M55STIF-6 | Rubber | 9.5 | 0.42 | 2740D-03 and 2840D-03 |
| MHBS016 | 1.00 | 1.28 | 416-400-16 | N/A | Rubber | 12.0 | 0.63 | 2740D-05 and 2840D-05 |

NOTE: Any assembly sold at a design factor lower than 2.5:1 requires the addition of a pressure containment shield, excluding 2849D.

ThreadMate® Anti-Gall Lubricant



| Part Number | Description |
|---|-------------|
| # | |
| MTM04T | 4 oz Tube |
| <p>ThreadMate® is an extreme duty lubricant developed to reduce galling during the assembly of threaded parts.:</p> <p>ThreadMate® promotes reliable sealing of pipe threads, even at high pressure, by reducing friction and galling during tightening, resulting in higher contact pressures of the sealing surfaces and better metal-to-metal contact.</p> <p>ThreadMate® reduces the torque needed to make pressure-tight connections and tighten fasteners</p> | |

For detailed ordering information, please consult price list or contact Parflex Division.



General Technical

Recommended Practices

Hose Selection, Installation and
Maintenance

Dash Size Systems for Hose and
Tubing

Twin/Multi-line Separation
Instructions

Government & Agency Approvals

Chemical Resistance Charts

Technical Data



Table of Contents

A
Hose

Hose Selection, Installation & Maintenance

| | | |
|--|--|------|
| | Selection, Installation and Maintenance of polyflex Hose and Hose Assemblies | F-2 |
| | Dash Sizes..... | F-3 |
| | Installation Tips | F-4 |
| | Selection of Hose Diameter from Flow Rate and Velocity..... | F-5 |
| | Determination of Pressure Drop in the Line | F-6 |
| | Pressure Drop..... | F-7 |
| | Permeability Coefficient | F-16 |
| | Recommended Tightening Procedures..... | F-17 |
| | Metric Conversion Chart | F-18 |
| | Glossary | F-19 |
| | General Chemical Resistance Table..... | F-20 |
| | Parker Engineering Manual (PFDE-ES29): Technical Matrix for Parker polyflex Offshore Hoses | F-24 |
| | Parker Engineering Manual (PFDE-ES28): Recommended Practices for Handling, Maintenance and Inspection of Long Length polyflex Offshore Hose and Hose Assemblies | F-29 |
| | Twin Line and Multi-Line Separation Instructions | F-42 |
| | Parker Safety Guide | F-43 |
| | Offer of Sale | F-47 |
| | Part Number Index | F-49 |

B
Fittings

C
Adapters &
Valves

D
Quick Couplings

E
Accessories

F
General Technical

Selection, Installation & Maintenance of *polyflex* Hose and Hose Assemblies

Hoses and hose assemblies have a finite life span which can be affected by many factors. This recommended practice should be read by designers and users of hose to assist them in the proper selection of hose. These guidelines, while not exhaustive, will assist the user in maintaining hydraulic and pneumatic systems.

READ THE PARKER SAFETY GUIDE CONTAINED IN THIS CATALOG IN ITS ENTIRETY.

PART 1 - How to select hose

- **Pressure** - Maximum operating pressure of the hose must be greater than or equal to the system pressure. Pressure surges or system “spikes” in excess of the maximum operating pressure will shorten hose life and must be avoided.
- **Temperature** - Ambient and fluid temperatures must not exceed the hose/fittings rated design temperature. Attempt to route hose away from or shield hose from high temperature sources.
- **Size** - Adequately size hose and fittings to avoid damaging hose with excessive turbulence, or heat build-up, while maintaining proper flow and pressure. (Refer to fluid velocity nomogram on page F-5.)
- **Fluid Compatibility** - Refer to Chemical Compatibility Guide on page F-20 for use of fluids with various materials. If unsure of an application, contact the factory. Additional care must be taken with gaseous applications. (See Safety Guide on page F-43.)
- **Environment** - Conditions such as ozone, UV light, harsh chemicals, salt water, and other airborne contaminants can degrade hose and shorten its life.
- **Length** - Hose length changes with pressure. This, along with equipment movement, must be considered in the system design.
- **Proper couplings** - Always follow manufacturers' specifications and do not mix components of different manufacturers.
- **Mechanical loads** - Conditions such as tensile and side loads, vibration, excessive flexing, and twist will reduce hose life. Use swivel fittings and adaptors to avoid hose twisting. Test the hose if the application is potentially problematic or unusual.
- **Electrical conductivity** - Determine if the hose must be non-conductive to prevent electrical current flow or conductive to dissipate static electricity. Choose hose and fittings accordingly. (See Safety Guide for Electrical Conductivity issues.)

PART 2 - Installation & Maintenance

- **Inspect components** - Check hose for cover cracks, blisters, cleanliness, kinks, cracks or core tube obstructions or other defects. Examine fittings for poor threads, obstructions, cracks, rust. Do not use hose or fittings if these problems exist.
- **Assemble per instructions** - Instructions are available for companies, trained and authorized by Polyflex.
- **Do not exceed specified minimum bend radius** - Use stress relievers to prevent sharp bends at the hose and fitting juncture. These can be spring guards or other stress relieving members.
- **Ensure that hose bends rather than twists with equipment motion.**
- **Use a torque wrench or the flats from finger tight method to properly install port connections.**
- **After installation, eliminate air entrapped in system, pressurize to maximum operating pressure, and check for leaks and proper system function.**
- **After installation, periodically (frequency depends on severity of application and potential risk) inspect the system for the following:**
 - 1. Blistered, degraded, or loose hose covers
 - 2. Stiff, cracked, or charred hose
 - 3. Cuts or abrasion of hose — look for exposed reinforcement
 - 4. Leaks in hose or fittings
 - 5. Damaged or corroded fittings
 - 6. Excessive build up of dirt, grease, oils, etc.
 - 7. Defective or broken accessories (clamping devices, kink guards)
 - 8. Kinks in hoses
 - Upon discovery of any of these items, replace it, repair it, but **DO NOT IGNORE IT!**
- Retest the system after all maintenance procedures.
- Establish replacement schedules based on previous service life, or when failures could result in damage, personal injury, or excessive/unacceptable downtime.


For detailed ordering information, please consult price list or contact Parflex Division.

Dash Sizes


Dash sizes are commonly used to designate hose I.D., plastic tubing and metal tubing O.D. and coupling size. Dash size systems in common use:

| Nominal Hose I.D. or Tubing O.D. | | Dash number for all polyflex hose | Nominal DN Size |
|----------------------------------|------------|--|-----------------|
| Inch | Millimeter | | |
| 3/32 | 2.0 | -012 | 2 |
| 1/8 | 3.2 | -2 | 3 |
| 5/32 | 4.0 | -025 or 2A | 4 |
| 3/16 | 4.8 | -3 | 5 |
| 1/4 | 6.3 | -4 | 6 |
| 5/16 | 7.9 | -5 | 8 |
| 3/8 | 9.5 | -6 | 10 |
| 13/32 | 10.3 | -6.5 | — |
| 1/2 | 12.7 | -8 | 12 |
| 5/8 | 15.9 | -10 | 16 |
| 3/4 | 19.1 | -12 | 20 |
| 7/8 | 22.2 | -14 | — |
| 1 | 25.4 | -16 | 25 |
| 1-1/8 | 28.6 | — | — |
| 1-1/4 | 31.8 | -20 | 32 |
| 1-3/8 | 34.9 | — | — |
| 1-1/2 | 38.1 | -24 | 40 |
| 1-13/16 | 46.0 | — | — |
| 2 | 50.8 | -32 | 50 |


Installation Tips

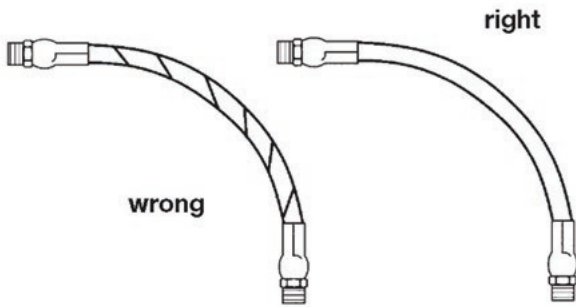


Hose is weakened when installed in twisted position. Also, pressure pulses in twisted hose tend to fatigue wire and loosen fitting connections. Design so that the machine motion produces bending rather than torsion.

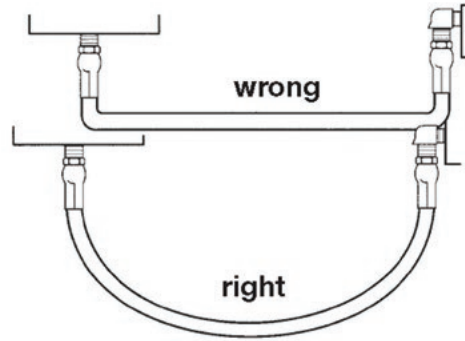

Hose should exit coupling in a straight position rather than side loaded. The minimum bend radius must not be exceeded to avoid kinking of hose and flow restriction.

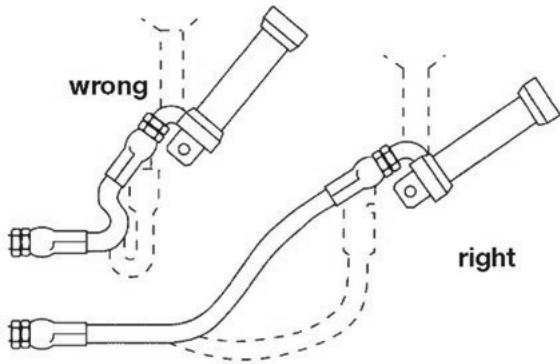


When hose assembly is installed in a flexing applications, remember that metal hose fittings are not part of the flexible portion.

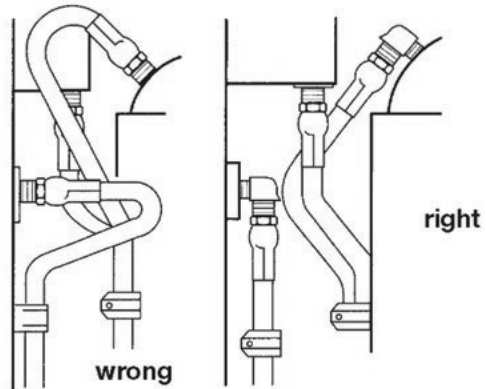


Use elbow or adapters as necessary to eliminate excess hose length and to ensure neater installation and easier maintenance.

Free hose length allowance:

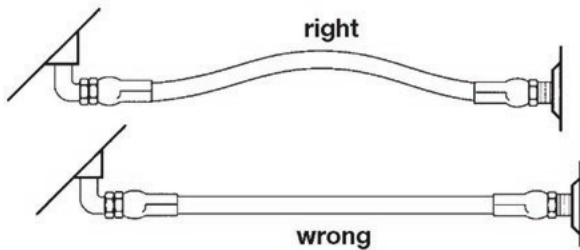

Pressure can change hose in length by as much as $\pm 2\%$. This must be considered when cutting hose to appropriate length.

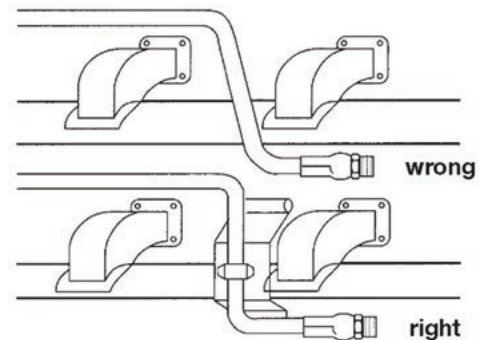

Avoid installing hose assemblies close to heat sources. However, if this should be required, insulate hose.

Selection of Hose Diameter from Flow Rate and Velocity

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Flow capacities of Parker hose at recommended flow velocities


The chart below is provided as an aid in the determination of the correct hose size.

Example:

At 10 gallons per minute in the left-hand column and 25 feet per second in the right-hand column (the maximum recommended velocity range for pressure lines). Lay a straight line across these two points. The inside diameter shown in the center column is above -6 so we have to use -8 (1/2").

For suction hose, follow the same procedure except use recommended velocity range for intake lines in the right-hand column.

Where: Q = flow in gallons per minute (gal/min & l/min)
V = velocity in feet per second (f/s & m/s)
d = hose inside diameter (mm & dash size)

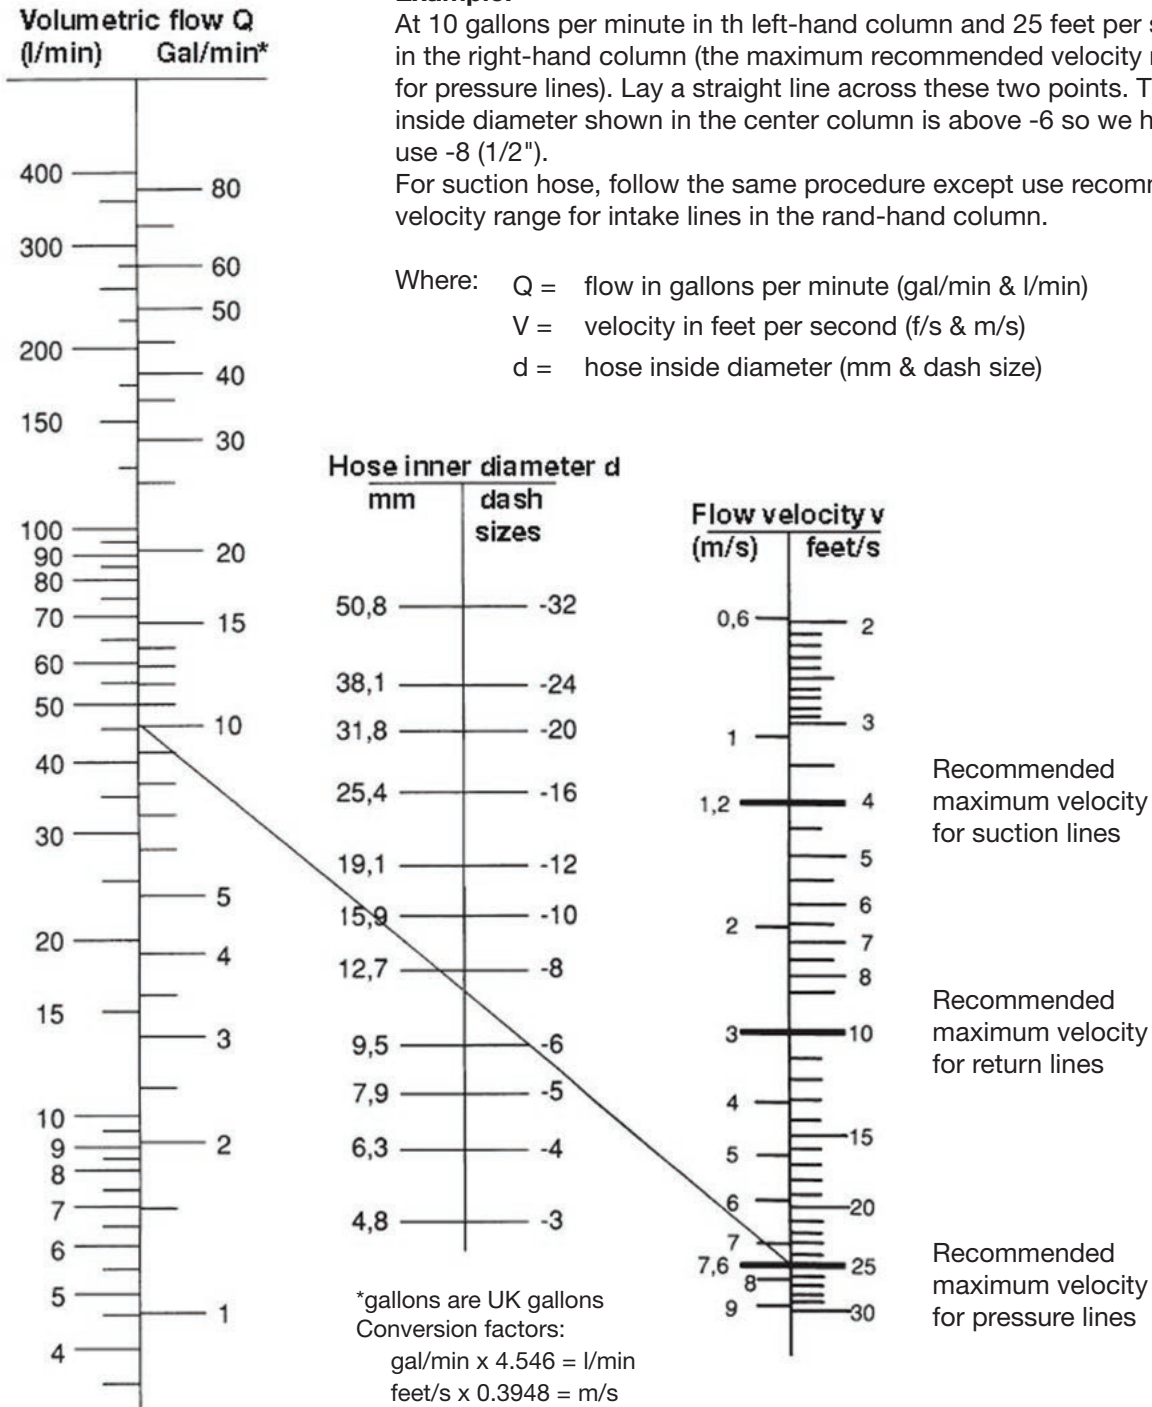

Recommended maximum velocity for suction lines

Recommended maximum velocity for return lines

Recommended maximum velocity for pressure lines

*Recommended velocities are according to hydraulic fluids of maximum viscosity 315 S.S.U. at 38°C working at room temperature within 18°C and 68°C

Determination of Pressure Drop in the Line

Velocity: $v = .409 \frac{Q}{d^2} = .509 \frac{W}{\rho d^2} = \frac{q}{.785d^2}$

Reynold's Number: $Re = 124 \frac{dvp}{\mu} = 6.31 \frac{W}{d\mu} = 378 \frac{qp}{d\mu}$

Pressure Drop, Isothermal, Incompressible Flow (Liquids):

$$\Delta P = .001294 \frac{fL\rho v^2}{d} = .00000336 \frac{fLW^2}{\rho d^5} = .0121 \frac{fLq^2}{d^5}$$

Pressure Drop, Isothermal, Compressible, long Lines (Gases and Vapors):

$$\frac{\Delta P}{P_1} = 1 - \sqrt{1 - \frac{fLp v^2}{12 g d P_1}}$$

Symbols and Units for Listed Formulas

d = Inside diameter of hose, inches

f = Friction coefficient, dimensionless

g = Gravitational constant, 32.2 ft/sec²

P1 = Input pressure, psi

ΔP = Pressure difference, psi

q = Rate of flow at flowing condition, cu. ft/min

Q = Rate of flow, gals/min

Re = Reynolds number, dimensionless

v = Flow velocity, ft/sec


W = Rate of flow, lbs/hr

ρ = Weight density of fluid, lbs/cu. ft


μ = Absolute (dynamic) viscosity, centipoises

Pressure Drop vs. Flow

For Size -02 (1/8") (3mm) Hoses

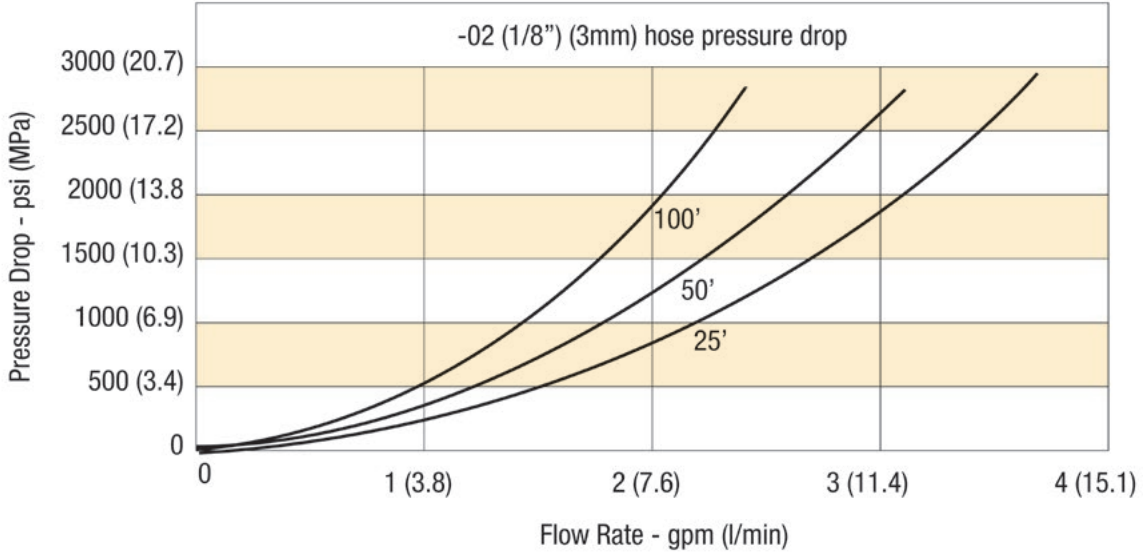


For Size -025 (5/32") (4mm) Hoses

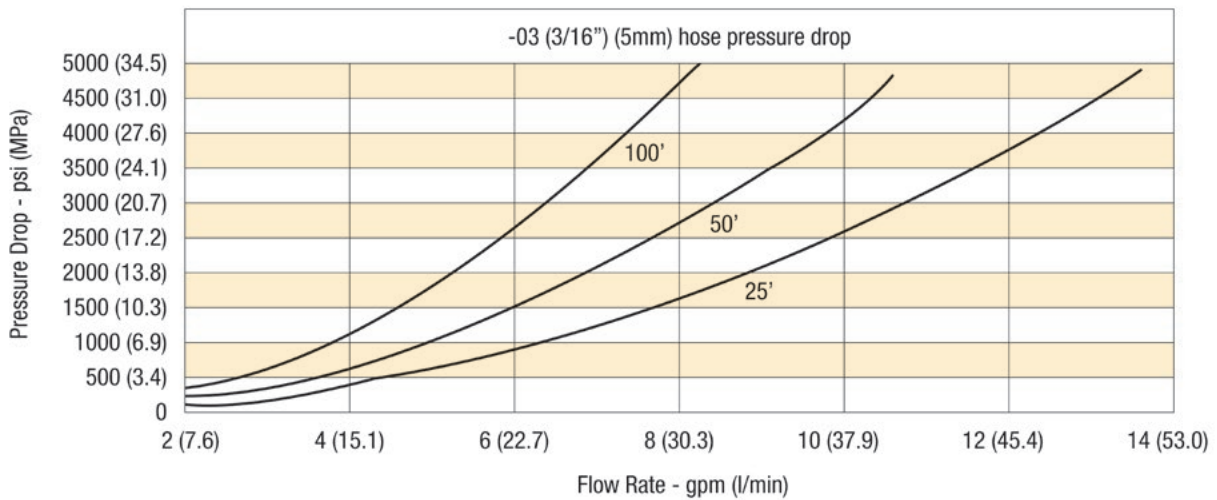


Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.

Pressure Drop vs. Flow

For Size -03 (3/16") (5mm) Hoses

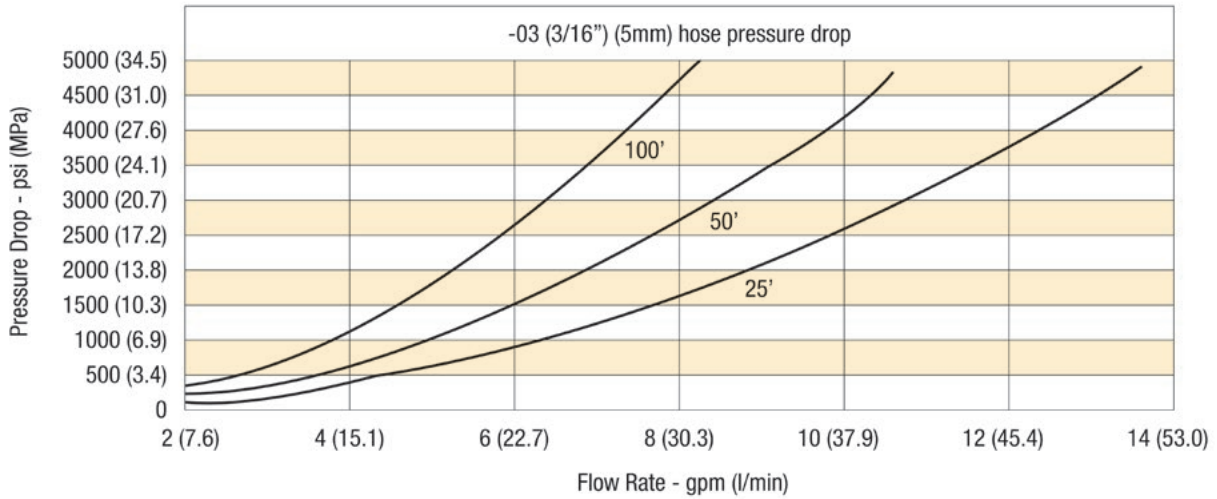

For Hose 2840D-03

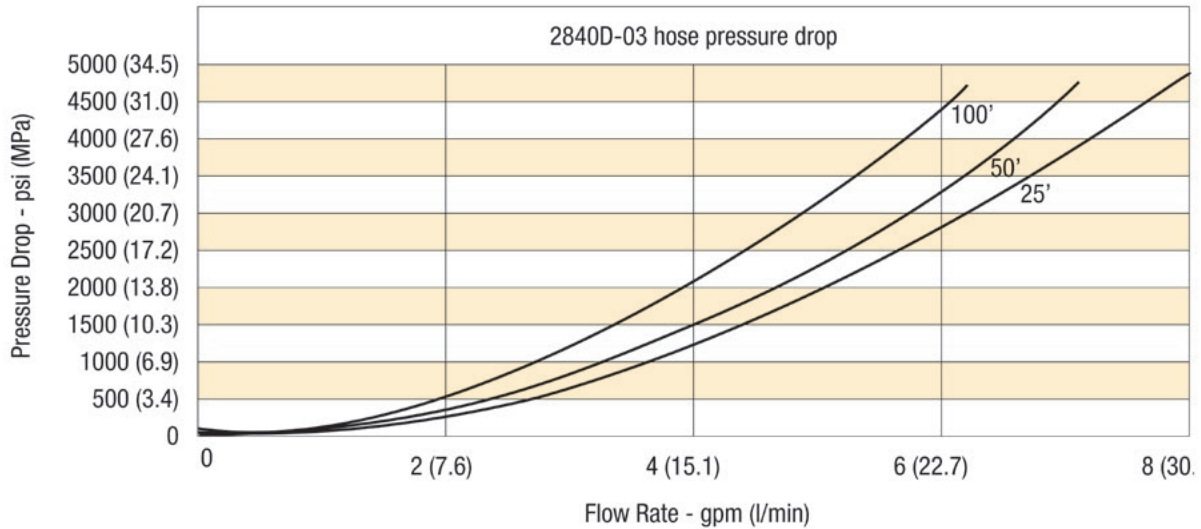


Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.


For detailed ordering information, please consult price list or contact Parflex Division.

Pressure Drop vs. Flow

For Size -04 (1/4") (6mm) Hoses

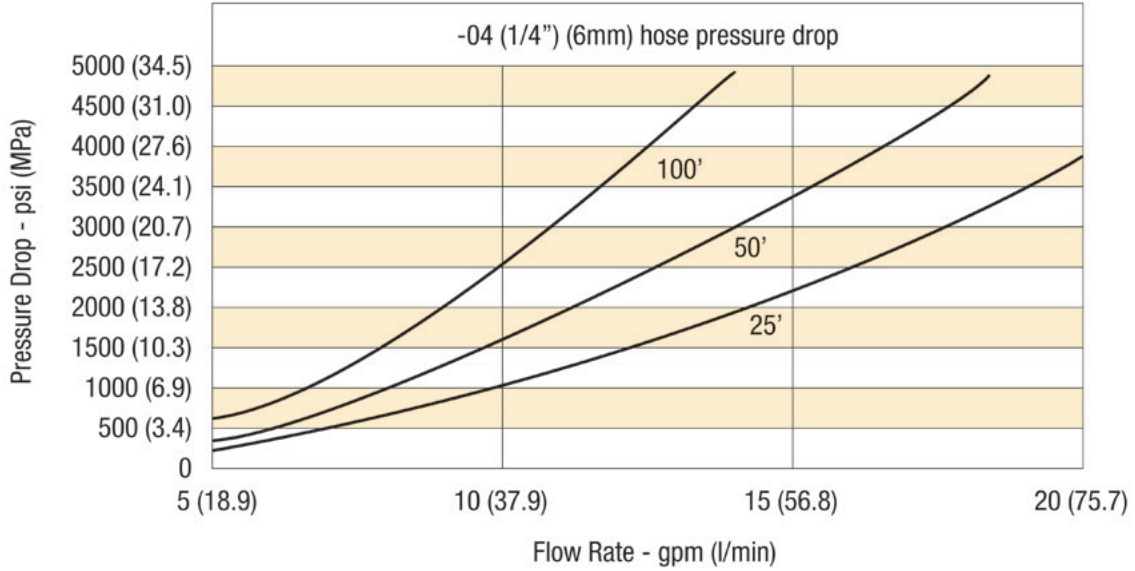

For Size -05 (5/16") (8mm) Hoses

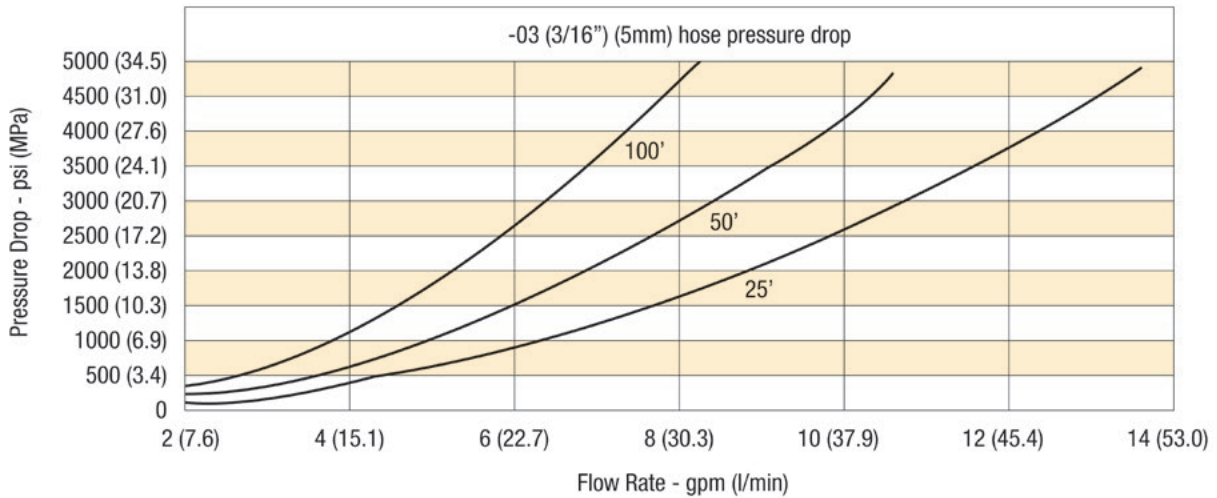


Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.




Pressure Drop vs. Flow

For Size -06 (3/8") (10mm) Hoses

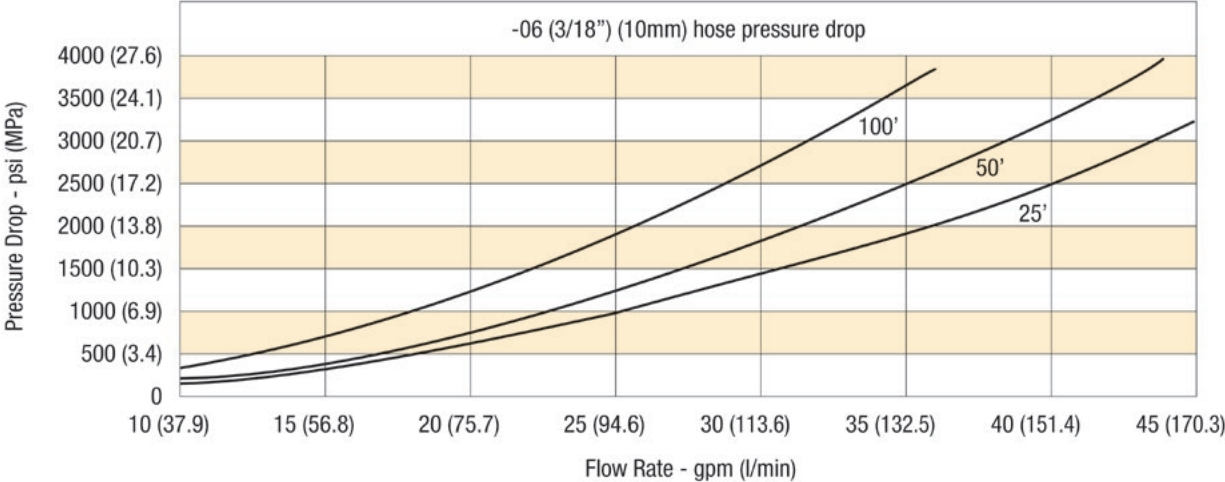

For Size -08 (1/2") (13mm) Hoses

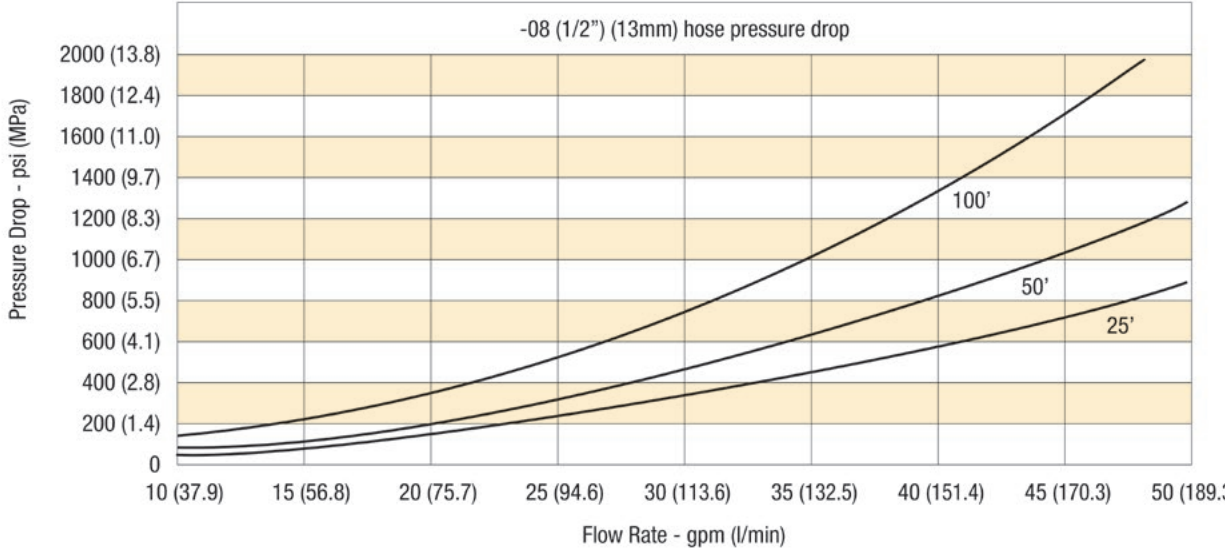

Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.


For detailed ordering information, please consult price list or contact Parflex Division.




- A Hose
- B Fittings
- C Adapters & Valves
- D Quick Couplings
- E Accessories
- F General Technical

Pressure Drop vs. Flow

For Size -12 (3/4") (20mm) Hoses

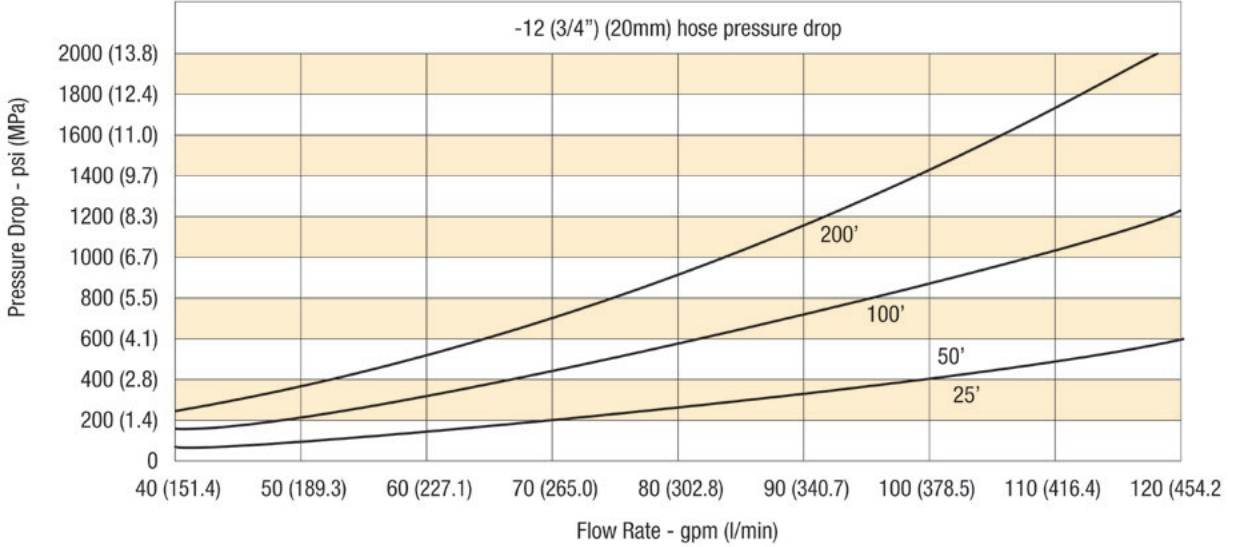

For Size -16 (1") (25mm) Hoses

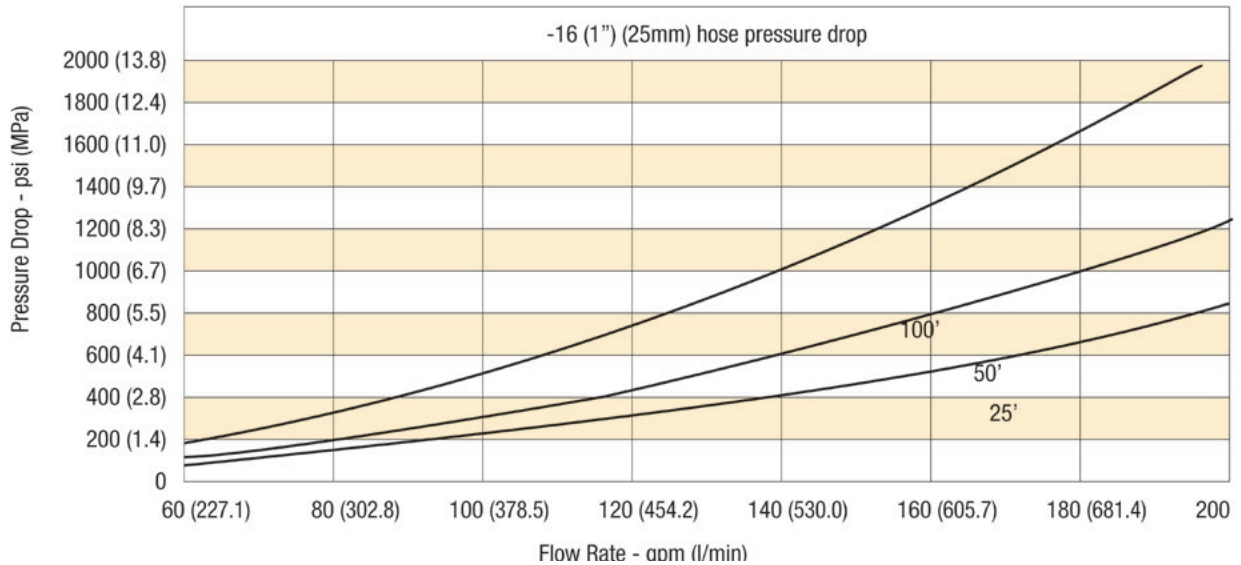

Results obtained from actual pressure drop test, pumping water through hose assemblies with normal end fittings.

Pressure Drop Tables for Different Hose Sizes

Remarks

- Figures shown in the table are for 1 meter of hose without fittings.
- Figures derived from calculation, not from testing.
- The recommended max fluid velocity is 7.6 m/s. Hoses have been used at higher fluid velocities. However this may result in cavitation. These flow figures are marked with a grey background.

Fluid: water

Dyn. viscosity: 1002 mPa s

Kin. viscosity: 1002 cSt

Temperature: 20°C

Flowrates: 5 up to 80 l/min. Sizes: 5 mm (-03) up to 13 mm (-08)

| Flowrate | | Pressure Drop in bar/m | | | | |
|----------|--------------|------------------------|------------|------------|-------------|-------------|
| (l/min) | Gal (US)/min | Nominal I.D. | | | | |
| | | 5 mm (-03) | 6 mm (-04) | 8 mm (-05) | 10 mm (-06) | 13 mm (-08) |
| 5 | 1.3 | 0.40 | 0.54 | 0.13 | 0.05 | 0.02 |
| 10 | 2.6 | 1.44 | 1.96 | 0.48 | 0.16 | 0.07 |
| 15 | 4.0 | | 4.35 | 1.07 | 0.36 | 0.15 |
| 20 | 5.3 | | | 1.80 | 0.61 | 0.25 |
| 25 | 6.6 | | | 2.70 | 0.91 | 0.38 |
| 30 | 7.9 | | | | 1.27 | 0.52 |
| 35 | 9.2 | | | | 1.69 | 0.69 |
| 40 | 10.6 | | | | | 0.90 |
| 45 | 11.9 | | | | | 1.12 |
| 50 | 13.2 | | | | | 1.35 |
| 60 | 15.9 | | | | | 1.91 |
| 70 | 18.5 | | | | | |
| 80 | 21.1 | | | | | |


Maximum flowrates for sizes 5 mm (-03) up to 13 mm (-08)

| Maximum fluid horizontal velocity is 7.6 m/s (laminar flow) | Maximum Volumetric Flowrate | | | | |
|---|-----------------------------|------------|------------|-------------|-------------|
| | Nominal I.D. | | | | |
| | 5 mm (-03) | 6 mm (-04) | 8 mm (-05) | 10 mm (-06) | 13 mm (-08) |
| Radius r in mm | 2.50 | 3.00 | 4.00 | 5.00 | 6.50 |
| Area in mm ² | 19.63 | 28.27 | 50.27 | 78.54 | 132.73 |
| Max. flowrate m ³ /min | 0.01 | 0.01 | 0.02 | 0.04 | 0.06 |
| Max. flowrate Gallons/min | 2.36 | 3.40 | 6.05 | 9.46 | 15.98 |
| Max. flowrate Liter/min | 8.95 | 12.89 | 22.91 | 35.80 | 60.50 |
| Max. flowrate bbl/min | 0.06 | 0.08 | 0.14 | 0.23 | 0.38 |

For detailed ordering information, please consult price list or contact Parflex Division.

Pressure Drop Tables for Different Hose Sizes

Hydraulic Chart, Sizes 5 mm (-03) to 13 mm (-08)

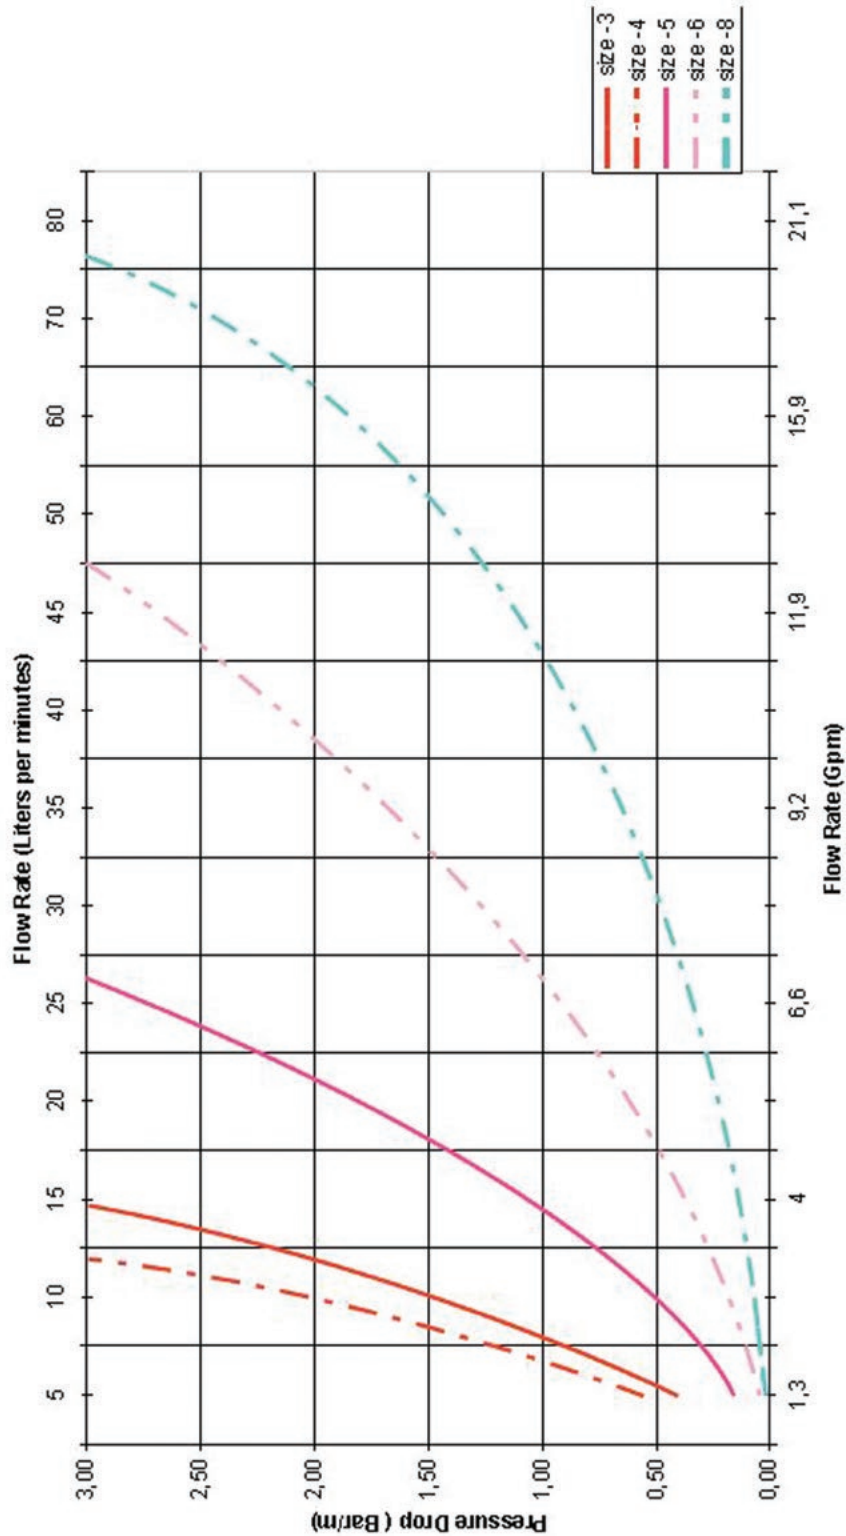

A Hose

B Fittings

C Adapters & Valves

D Quick Couplings

E Accessories

F General Technical

Pressure Drop Tables for Different Hose Sizes

Flowrates: 5 up to 80 l/min. Sizes: 5 mm (-03) up to 13 mm (-08)

| Flowrate | | | Pressure Drop in bar/m | | | | | |
|----------|--------------|------------------|------------------------|-------------|-------------|-------------|-------------|-------------|
| (l/min) | Gal (US)/min | Oilfield BBL/min | Nominal I.D. | | | | | |
| | | | 20 mm (-12) | 25 mm (-16) | 32 mm (-20) | 38 mm (-24) | 50 mm (-32) | 76 mm (-48) |
| 50 | 13 | 0.31 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 |
| 100 | 226 | 0.62 | 0.16 | 0.04 | 0.01 | 0.01 | 0.00 | 0.00 |
| 150 | 40 | 0.95 | 0.36 | 0.09 | 0.03 | 0.01 | 0.00 | 0.00 |
| 200 | 53 | 1.26 | 0.61 | 0.15 | 0.05 | 0.02 | 0.01 | 0.00 |
| 250 | 66 | 1.57 | 0.91 | 0.22 | 0.07 | 0.03 | 0.01 | 0.00 |
| 300 | 79 | 1.88 | 1.27 | 0.31 | 0.10 | 0.04 | 0.01 | 0.00 |
| 400 | 106 | 2.52 | | 0.54 | 0.17 | 0.07 | 0.02 | 0.00 |
| 500 | 132 | 3.14 | | 0.81 | 0.26 | 0.11 | 0.03 | 0.00 |
| 700 | 185 | 4.41 | | | 0.49 | 0.21 | 0.05 | 0.01 |
| 1000 | 264 | 6.29 | | | 0.94 | 0.40 | 0.10 | 0.01 |
| 1500 | 396 | 9.43 | | | | 0.86 | 0.21 | 0.03 |
| 2000 | 528 | 12.57 | | | | | 0.36 | 0.05 |
| 3000 | 793 | 18.88 | | | | | | 0.11 |
| 3500 | 925 | 22.02 | | | | | | 0.14 |
| 4000 | 1057 | 25.17 | | | | | | 0.18 |
| 4500 | 1189 | 28.30 | | | | | | 0.22 |


Maximum flowrates for sizes 5 mm (-03) up to 13 mm (-08)

| Maximum fluid horizontal velocity is 7.6 m/s (laminar flow) | Maximum Volumetric Flowrate | | | | | |
|---|-----------------------------|-------------|-------------|-------------|-------------|-------------|
| | Nominal I.D. | | | | | |
| | 20 mm (-12) | 25 mm (-16) | 32 mm (-20) | 38 mm (-24) | 50 mm (-32) | 76 mm (-48) |
| Radius r in mm | 10.0 | 12.5 | 16.0 | 19.0 | 25.0 | 38.0 |
| Area in mm ² | 314.2 | 490.9 | 804.2 | 1134.1 | 1963.5 | 4536.5 |
| Max. flowrate m ³ /min | 0.3 | 0.4 | 0.7 | 1.0 | 1.8 | 4.1 |
| Max. flowrate Gallons/min | 74.7 | 116.6 | 191.1 | 269.5 | 466.6 | 1078.0 |
| Max. flowrate Liter/min | 282.6 | 441.6 | 723.5 | 1020.2 | 1766.3 | 4080.7 |
| Max. flowrate bbl/min | 1.8 | 2.8 | 4.6 | 6.4 | 11.1 | 25.7 |

For detailed ordering information, please consult price list or contact Parflex Division.

Pressure Drop Tables for Different Hose Sizes

Hydraulic Chart, Sizes 20 mm (-12) to 76 mm (-48)

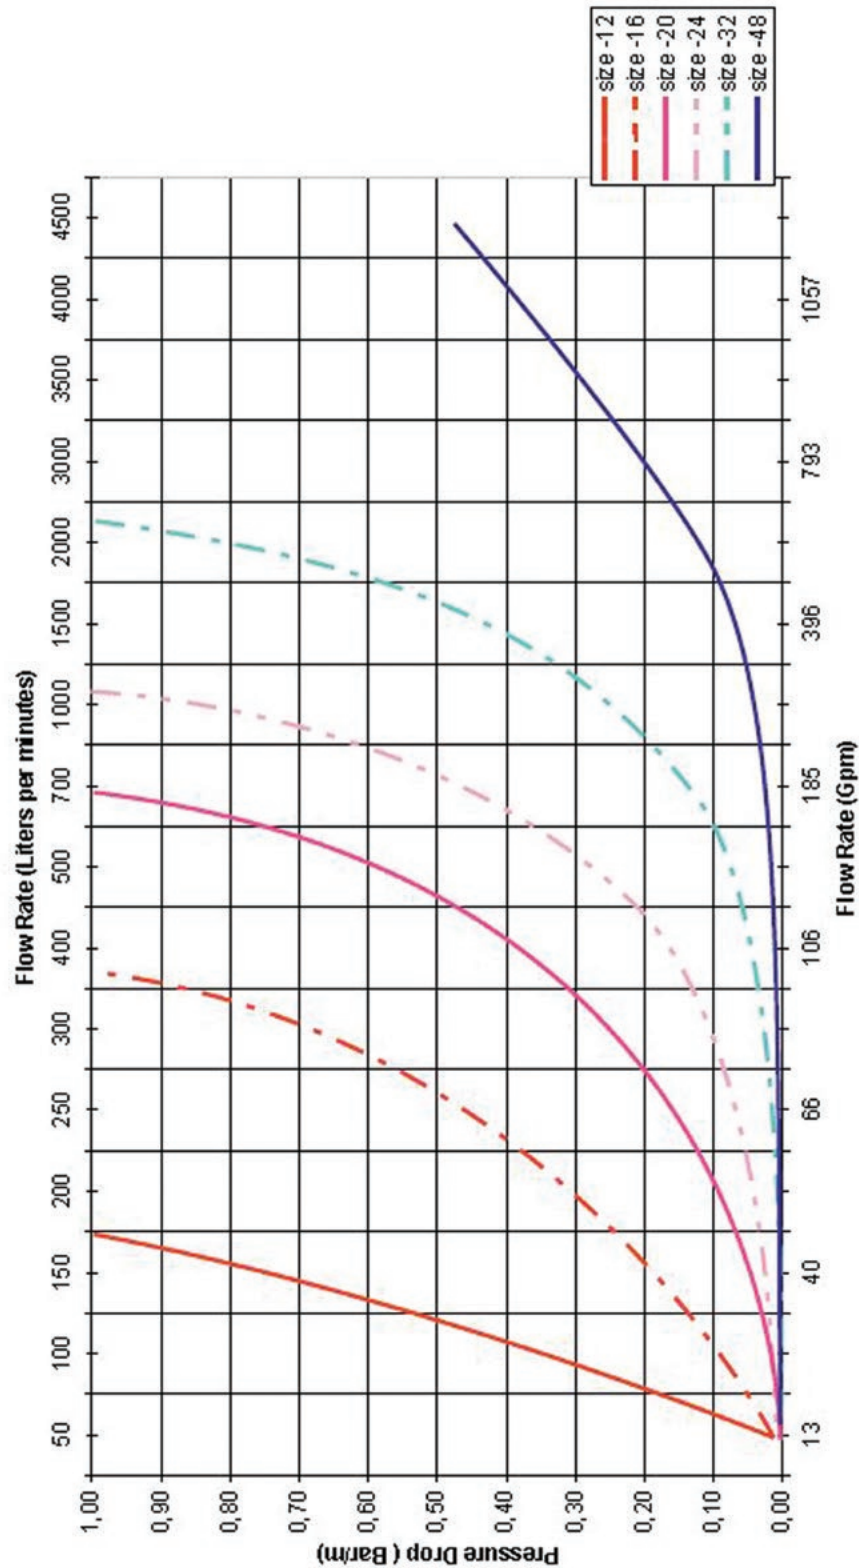

Gas Permeability of Plastics

Permeability coefficient

$$\text{Permeability Coefficient} = \frac{V}{A \times T \times p}$$

Where: V is the volume of gas, in cm³, which diffuses through a 1mm thickness
 A is the area across which the gas diffuses, in m².
 T is the diffusion time, in days.
 p is the pressure difference across the plastic, in bar


Permeability Coefficients per DIN 53380

| Material | Gas | | | | |
|---------------|----------------|----------------|-----------------|----------------|------|
| | N ₂ | O ₂ | CO ₂ | H ₂ | He |
| PTFE | 50 | 150 | 1500 | — | 3500 |
| PVDF | 3 | 2 | 10 | — | 60 |
| PA-6 XE 3289 | 1 | 4 | 10 | 100* | 60* |
| PA-6 A 28 NZ | 0.5 | 2 | 5 | 50* | 30* |
| PA-12 L 2124 | — | 30 | 180 | 210 | 160 |
| PA-12 P40 TL | — | — | 105 | — | — |
| PA-12 L 25W40 | 8 | 35 | 150 | 1000* | 500* |
| PA-12 L 2140 | — | 12 | 71 | — | 130 |
| PA-11 P 40 TL | — | — | 55 | 130 | — |
| PA-11 POTL | 2 | 20 | 65 | 65 | — |
| POM H 2320 | 5 | 10 | 130 | 35 | 40 |
| POM 150 SA | 2 | 4 | 20 | — | — |
| PEE 4055 | 150 | — | 3000 | — | 1400 |
| PEE 5556 | 120 | — | 1600 | — | 900 |
| PEE 7246 | — | — | — | — | 300 |

* Calculated value. Diffusion constants based on normal room temperature. Actual behavior may vary considerably because of variations in processing the plastic.

Recommended Tightening Procedures

| Connection | Thread Sizes | Tightening Torque | |
|------------------------|--------------|-------------------|---------|
| | | ft•lb | N•m |
| High Pressure | | | |
| 1/4" | 9/16" - 18 | 25 | 34 |
| 3/8" | 3/4" - 16 | 50 | 69 |
| 9/16" | 1-1/8" - 12 | 75 | 103 |
| Medium Pressure | | | |
| 1/4" | 7/16" - 20 | 20 | 28 |
| 3/8" | 9/16" - 18 | 30 | 41 |
| 9/16" | 13/16" - 16 | 85 | 117 |
| 3/4" | 3/4" NPSM | 90 | 124 |
| 1" | 1-3/8" - 12 | 125 | 173 |
| Type "M" Swivel | | | |
| A9 | 9/16" - 18 | 25-30 | 34-41 |
| A12 | 3/4" - 16 | 40-50 | 55-69 |
| A14 | 7/8" - 14 | 50-60 | 69-83 |
| A16 | 1" - 12 | 75-85 | 103-117 |
| A21 | 1-5/16" - 12 | 100-120 | 138-166 |
| JIC | | | |
| 1/4" | 7/16" - 20 | 11-12 | 15-16 |
| 3/8" | 9/16" - 18 | 18-21 | 25-28 |
| 1/2" | 3/4" - 16 | 36-39 | 49-52 |
| 3/4" | 1-1/16" - 12 | 80-88 | 109-119 |
| 1" | 1-5/16" - 12 | 100-108 | 136-146 |

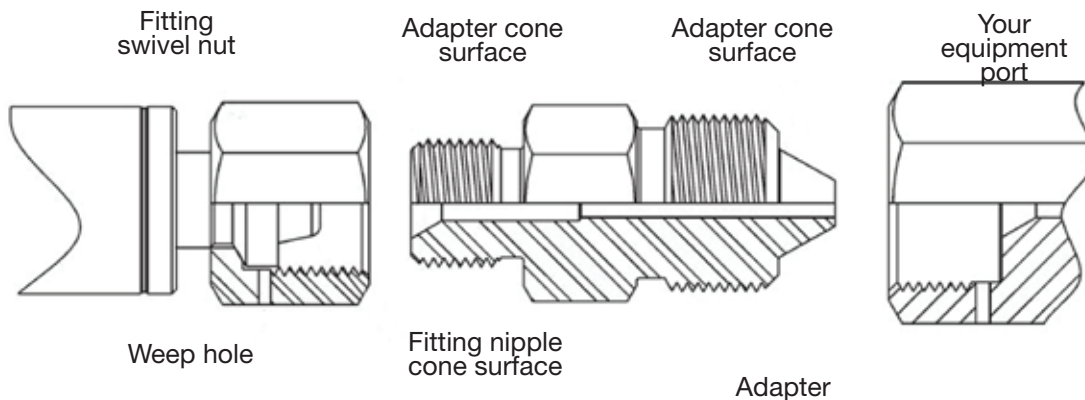

Leakage at swivel nut-to-adapter Joint (Seen by leak at weep hole in swivel nut)

1. Reduce system pressure to zero
2. Unscrew swivel nut and check cone surfaces of adapter and hose insert
3. If hose insert is damaged, return hose to **polyflex** for repair and retest
4. If cone surfaces look good after cleaning, re-tighten swivel nut. Do not exceed 150% of recommended torque.

Leakage at type "M" adapter-to-port (Seen by leak at weep hole in pressure port, or leak at threads for NPT adapters.)

1. Reduce system pressure to zero
2. Slacken hose swivel nut
3. Tighten adapter into port
4. Re-tighten swivel nut

Never use the swivel nut to tighten the adapter into the port.

Metric Conversion Chart

| | English to Metric | | | Metric to English | | |
|--------------------------|---|--|----------------------------|--|---|-------------------|
| | Convert From | Convert To | Multiply By | Convert From | Convert To | Multiply By |
| Area | sq. in. (in ²) | sq. mm (mm ²) | 645.16 | sq. mm (mm ²) | sq. in. (in ²) | 0.00155 |
| | sq. in. (in ²) | sq. cm (cm ²) | 6.4516 | | | |
| | sq. ft. (ft ²) | sq. meters (m ²) | 0.0929 | | | |
| Density | pounds/cubic foot (lb/ft ³) | kg/cubic meter (kg/m ³) | 16.02 | kg/cubic meter (kg/m ³) | pounds/cubic foot (lb/ft ³) | 0.0624 |
| Energy | British Thermal Units (Btu) (1J=Ws=0.2388 cal) | joules (J) | 1055 | joules (J) | British Thermal Units (Btu) | 0.000947 |
| Force | pounds - force (lbf) (1N = 0.102 kgf) | newtons (N) | 4.448 | newtons (N) | pounds - force (lbf) | 0.2248 |
| Length | inches (in) | millimeters (mm) | 25.4 | millimeters (mm) | inches (in) | 0.03937 |
| | feet (ft) | meters (m) | 0.3048 | meters (m) | feet (ft) | 3.281 |
| | miles (mi) | kilometers (km) | 1.609 | kilometers (km) | miles (mi) | 0.621 |
| Mass (Weight) | ounces (oz) | grams (g) | 28.35 | grams (g) | ounces (oz) | 0.035 |
| | pounds - mass (lb) | kilograms (kg) | 0.4536 | kilograms (kg) | pounds - mass (lb) | 2.205 |
| | short tons (2000lb) (tn) | metric tons (1000kg) | 0.9072 | metric tons (1000kg) | short tons (2000lb) (tn) | 1.102 |
| Power | horsepower (550 ft. lb/s) (hp) | kilowatts (kW) | 0.7457 | kilowatts (kW) | horsepower (550 ft. lb/s) (hp) | 1.341 |
| Pressure | pounds/square inch (psi) | kilograms (f)/square cm (kg(f)/cm ²) | 0.0703 | kilograms (f)/square cm (kg(f)/cm ²) | pounds/square inch (psi) | 14.22 |
| | pounds/square inch (psi) | kilopascals (kPa) | 6.8948 | kilopascals (kPa) | pounds/square inch (psi) | 0.145 |
| | pounds/square inch (psi) | bars (100 kPa) | 0.06895 | bars (100 kPa) | pounds/square inch (psi) | 14.503 |
| Stress | pounds/square inch (psi) (1N/mm ² = 1MPa) | megapascals (MPa) | 0.006895 | megapascals (MPa) | pounds/square inch (psi) (1N/mm ² = 1MPa) | 145.039 |
| Temperature | degrees Fahrenheit (°F) | degrees Celsius (°C) | 5/9 (after subtracting 32) | degrees Celsius (°C) | degrees Fahrenheit (°F) | 9/5 (then add 32) |
| Torque or Bending Moment | pounds-force-foot (lb-ft) | Newtons-meter (Nm) | 1.3567 | Newtons-meter (Nm) | pounds-force-foot (lb-ft) | 0.737 |
| | pounds-force-inch (lb-in) | Newtons-meter (Nm) | 0.113 | Newtons-meter (Nm) | pounds-force-inch (lb-in) | 8.85 |
| Velocity | feet/seconds (ft/s) | meters/second (m/s) | 0.3048 | meters/second (m/s) | feet/seconds (ft/s) | 3.2808 |
| Viscosity | dynamic (centipoise) | Pascal-second (Pas) | 0.001 | Pascal-second (Pas) | dynamic (centipoise) | 1000 |
| | kenematic-foot ² /sec (ft ² /s) | meter ² /sec (m ² /s) | 0.0929 | meter ² /sec (m ² /s) | kenematic-foot ² /sec (ft ² /s) | 10.7643 |
| Volume | cubic inch (in ³) | cubic centimeter (cm ³) (milliliter) | 16.3871 | cubic centimeter (cm ³) (milliliter) | cubic inch (in ³) | 0.061 |
| | quarts (qt) | liters (1000 cm ³) | 0.9464 | liters (1000 cm ³) | quarts (qt) | 1.057 |
| | gallons (gal) | liters | 3.7854 | liters | gallons (gal) | 0.2642 |

For detailed ordering information, please consult price list or contact Parflex Division.

Glossary

Abrasion

Abrasion occurs in numerous forms; two of the more common are the typical rubbing or chafing, with the second being very high frequency, low amplitude friction. This type of abrasion results from pump pressure pulses otherwise known as pump ripple. It can also be caused by equipment vibration or resonance. Abrasion may occur when two hose lines cross or when a hose line rubs or bears against a fixed point. Abrasion resistance is also a function of temperature and attack of the cover material by aggressive chemicals. Spring guards or other protective sleeving can also ward off premature hose failure resulting from abrasion. Spring guards also distribute bending force often associated with excessive side loading or even kinking at the skirt of the coupling.

Ambient temperature

Exceedingly high or low ambient temperatures will affect the materials from which the hose is constructed and will negatively influence hose life. When at all possible, the hose should be routed in such a manner as to protect it from heat sources. In extreme cold applications, the equipment should be designed with remote relief valves to allow circulation and warming of the oil before hose articulation is attempted. The hose liner (core tube) of choice for extremely high or low temperature is Teflon®. Teflon® is serviceable at temperatures as low as -100°F and as high as +450°F. Consult the specific hose operating parameters for more information.

Bend Radius

The minimum bend radii listed in this catalog are valid at rated working pressures and indicated service temperatures. Service life of a hose may be shortened if the minimum radius is exceeded or if the hose is flexed continuously in use. Burst pressure and working pressure The specified burst pressure for each hose style and dash size are for unaged hoses tested at normal laboratory temperature in accordance with SAE J343 specification for normal service and technically ideal installations. The maximum recommended working pressure is 1/4 of the minimum rated burst pressure, except as otherwise specifically stated in those product specifications. For more severe service, a higher rated working pressure hose may have to be selected.

Hose installation tips

Establish hose size (I. D.) and style based upon flow rate (GPM), pressure drop, and chemical compatibility with fluid medium. Other significant factors to be considered in hose selection and installation are discussed briefly as follows:

Operating temperature

The temperature range for satisfactory service (maximum hose life) depends to a great extent upon the fluid being conveyed. Use of a hose above maximum specified temperature ratings will shorten hose life due, but not limited, to oxidation, chemical degradation and loss of compression within the coupling.

Pressure effects

Pressure surges and system shocks (spikes) are common in hydraulic systems. The normal 4:1 safety factor should reflect these transient pressures. Where these surges and shocks are considered severe or hazardous, the safety factor should be increased.

When hose is under pressure, it may change in length by as much as $\pm 3\%$. Installation should compensate for shortening by providing an appropriate amount of slack and for lengthening by allowing space for this growth to be absorbed.

Routing and clamping

Whenever possible, and maximum efforts should be made to do so, hose should be routed to flex in a single plane. Routing hoses in flexure through compound bends results in torsions. When this is unavoidable, the torsion should be distributed over the maximum hose length possible. Wire reinforced hoses suffer the most rapid and severe loss of service life when applied in torsion. Extremely tight and improperly located clamps focus this torsion over short distances.

Analysis of the hose function is required before the proper clamping techniques can be selected. In some applications, hoses must be contained to stay out of harm's way and at the same time be free to come and go with equipment articulation. Other applications may require restrictive clamping, in which case a protective material should be used around the hose to provide the grasp without deformation of the hose by the clamp. These techniques also apply to the use of the popular method of clamping and clustering hoses with plastic tie straps.

Parker swivel adaptors feature 360° swiveling action that especially suits them for use in applications where hose moves, bends or twists. Swivel adapters connected to hose assemblies relieve twisting, prevent excessive flexing of hose, eliminate need for long radius bends, and cushion intraline shock caused by peak system pressure pulses.

High pressure adapters

It is critical that the adapter material be properly suited to the fluid media. Widely varying conditions frequently necessitate high pressure adapters constructed of materials other than conventional 316 stainless steel. Since many variables affect the corrosion resistance of metallic materials, it is Parker Hannifin's policy not to recommend materials based on corrosion resistance for specific fluid applications. The published recommended working pressure represent the capability of the subject fitting. Nevertheless, in some instances, the hose, hose fitting or other connector assembled to the adapter may dictate the maximum working pressure. The end-user should read and understand the Parker Safety Guide (Bulletin 4400-B.1) and follow its suggested practices and warnings.

General Chemical Resistance Table

Ratings Code

- G — Good to excellent. Little or no swelling, tensile or surface changes. Preferred choice.
- L — Marginal or conditional. Noticeable effects but not necessarily indicating lack of serviceability. Further testing suggested for specific application. Very long-term effects such as stiffening or potential for crazing should be evaluated.
- P — Poor or unsatisfactory. Not recommended without extensive and realistic testing.
- — Indicates that this was not tested.

Materials Code for Hose Core Tubes

- N Polyamide
- M Coextruded tube with Fluoropolymer inner liner

Materials Code for Hose Cover

- N Polyamide
- U/HF Polyurethane

Notes on the Chemical Resistance Table

- (1) The fluid resistance tables are simplified rating tabulations based on immersion tests at 24°C. Higher temperatures tend to reduce ratings. Since final selection depends on pressure, fluid and ambient temperature and other factors not known to Parker Hannifin, no performance guarantee is expressed or implied. The indications do not imply any compliance with standards and regulations and do not refer to possible changes of color, taste or smell. For food and drinking water specially approved materials have to be used. For fluids not listed or for advice on particular applications, please consult Parker Hannifin GmbH, **polyflex** Division in Hüttenfeld, Germany.
- (2) Hose applications for these fluids must take into account legal and insurance regulations. The chemical resistance indicated does not express or imply approval by certain institutions.
- (3) Satisfactory at some concentrations and temperatures, unsatisfactory at others.
- (4) For gas applications, the cover should be pin-pricked and the pressure must not be released quickly. Special safety guard accessories are to be used to prevent damage or personal injury in the event of failure.
- (5) Chemical resistance does not imply low permeation rates. Please consult Parker Hannifin for a recommendation for your specific requirements.
- (6) The indication of chemical resistance does not imply any special food compatibility; it refers only to the chemical resistance of the material.
- (7) Chemical resistance does not imply acceptability for use in airless paintspray applications. These applications require a special, electrically conductive hose. Reference the Safety Guide, 2.1.2

Not all remarks may apply to Oil & Gas products

General Chemical Resistance Table

| Chemical | N | U/HF | M |
|-------------------------------------|---|------|---|
| Acetone | G | P | L |
| Acetylene | — | — | — |
| Air (4) | G | G | G |
| Ammonium Chloride | P | G | G |
| Ammonium Hydroxide | G | P | G |
| Anhydrous Ammonia | P | P | — |
| Aniline | P | P | G |
| Aromatic Hydrocarbons | G | L | — |
| Asphalt | G | G | L |
| Benzene | G | L | G |
| Butane (2) (4) | G | L | — |
| Calcium Chloride | — | G | G |
| Carbon Dioxide (4) | G | G | — |
| Carbon Monoxide (4) | — | G | — |
| Carbon Tetrachloride | G | P | G |
| Chlorinated Hydrocarbon Base Fluids | G | L | — |
| Chlorinated Petroleum Oil | G | L | — |
| Chlorinated Solvents | — | P | — |
| Chlorine, Gaseous, Dry | P | P | — |
| Chromic Acid | — | P | L |
| Citric Acid Solutions | G | L | G |
| Crude Petroleum Oil | G | G | — |
| Cyclohexan (2) | G | G | G |
| Diesel Fuel (2) | G | G | — |
| Diester Oils | G | P | — |
| Ethanol (6) | G | L | — |
| Ethers | G | P | G |
| Ethylene Glycol | G | L | G |
| Ethylene Oxide | G | L | — |
| Fatty Acids | G | — | G |
| Formaldehyde | L | P | G |
| Formic Acid J | P | P | G |
| Fuel Oil (2) | G | L | G |
| Gas (Oil) (2) | G | G | — |
| Gasoline | G | — | G |
| Glycerine | G | L | G |
| Glycols (to 135°F) | G | L | G |
| Grease (petroleum base) | G | G | — |

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

General Chemical Resistance Table

| Chemical | N | U/HF | M |
|---|---|------|---|
| Hexane (2) | G | G | G |
| Hydraulic Fluid (petroleum base) | G | G | L |
| Hydraulic Fluid (phosphate ester base) | G | L | — |
| Hydraulic Fluid (water base) | G | G | — |
| Hydraulic Oil (petroleum base) | G | G | L |
| Hydrochloric Acid | L | P | G |
| Hydrofluoric Acid | P | P | G |
| Hydrolube (hydraulic fluid/water glycol base) | G | L | — |
| IRUS 902 (hydraulic fluid/water-oil emulsion) | G | G | — |
| Isooctane (2) | G | G | G |
| Kerosene (2) | G | L | G |
| Ketones | G | P | G |
| Lime (calcium oxide) | G | G | G |
| Lindol (hydraulic fluid/phosphate esters) | G | P | — |
| LP-Gas | — | — | — |
| Lubricating Oils (diester base) | G | P | — |
| Lubricating Oils (petroleum base) | G | G | G |
| Methane | — | — | — |
| Methanol | G | P | — |
| Methyl Alcohol (6) | G | P | G |
| Methyl Ethyl Ketone (MEK) | G | P | G |
| Methyl Ethyl Ketone Peroxide (MEKP) | L | P | — |
| Methyl Isobutyl Ketone (MIBK) | G | P | G |
| Methylen Chloride | L | P | G |
| Mineral Oil | G | G | G |
| Mineral Spirits | — | L | — |
| Motor Oils | G | G | G |
| Naphta | G | P | G |
| Natural Gas (4) | — | — | — |
| Nitric Acid | P | P | L |
| Nitrobenzene | G | P | G |
| Nitrogen, Gaseous (4) (5) | G | G | G |
| Nitrous Oxide | L | — | — |
| Oil (SAE) | G | G | — |
| Oxygen, Gaseous (4) (5) (6) | G | G | G |
| Pentane (2) | G | L | G |
| Perchloric Acid | P | P | L |
| Petroleum Ether | — | — | — |

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

General Chemical Resistance Table

| Chemical | N | U/HF | M |
|--|---|------|---|
| Petroleum Oils | G | G | — |
| Phenols | P | P | — |
| Phosphate Esters (above 135°F) | G | P | — |
| Phosphate Esters (to 135°F) | G | P | — |
| Propane (4) (5) | — | — | — |
| Propylen Glycol | — | G | G |
| Salt Water | — | — | G |
| Silicone Greases | G | G | — |
| Silicone Oils | G | G | — |
| Sodium Borate | G | G | G |
| Sodium Carbonate | — | — | — |
| Sodium Chloride Solutions | G | G | G |
| Sodium Hydroxide, 50% | P | P | G |
| Sodium Hypochloride | P | P | G |
| Steam | P | P | G |
| Straight Synthetic Oils (phosphate esters) | G | P | — |
| Sulphur Dioxide | L | L | G |
| Sulphur Hexafluoride Gas (4) (5) | G | G | — |
| Sulphuric Acid | P | P | — |
| Toluol, Toluene | G | L | G |
| Trichlorethylene | L | P | G |
| Ucon (hydraulic fluid/water glycol base) | G | L | — |
| Water (above 60°C) (6) | G | P | L |
| Water (to 60°C) (6) | G | G | G |
| Water Glycols (above 60°C) | L | P | — |
| Water Glycols (to 60°C) | G | L | — |
| Water in oil Emulsions (above 60°C) | L | P | — |
| Water in oil Emulsions (to 60°C) | G | L | — |
| Xylene | G | P | G |
| Zinc Chloride | G | G | G |

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

PARKER ENGINEERING MANUAL Technical Matrix for Parker *polyflex* Offshore Hoses Parker Publication No. PFDE-ES29 Revised: March 2013

Scope

This engineering standard contains the main information which is important for the selection of hose for offshore applications.

Guidelines for handling and storage of hose, see PFDE-ES28 on pg F-29.

Notes

Detailed information is available in the appropriate hose datasheets. They always have precedence.

Most of the hoses have been fully qualified according to ISO 13628-5 for the working pressures stated, some at even higher pressures and temperatures. Contact Parker for detailed information.

Working pressures stated below are based on safety factor 4:1.

Maximum lengths values are approximate ones. Most of them have been proven during the manufacturing process.

Collapse pressures are typical values. Some of them have been measured on straight hoses, some at the hose minimum bend radius. The values measured at the minimum bend radius as per ISO 13628-5 are highlighted in all tables in *italic underlined*.

All values are only valid for hose assemblies, assembled with appropriate Parker fittings acc. to Parker assembly instructions assembled by Parker trained operators.

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

1 Hoses with methanol washed Nylon 11 core tube, multiple layers of steel wire and a Nylon outer jacket

Working temperature for these hoses is (-40°F to +212°F) (-40°C to +100°C).

For chemical resistances of core tubes, see PFDE-ES28 on pg F-29.

| Hose Part No. | Nominal I.D. | Nominal O.D. (mm) | Working Pressure | | Burst Pressure | | Max. Manufact. Length (m) | Weight in Air (kg/m) | Collapse Pressure (bar) |
|------------------|-----------------------------|-------------------|------------------|------|----------------|------|---------------------------|----------------------|-------------------------|
| | | | psi | bar | psi | bar | | | |
| 2240N-04V91 | 6.4 mm 1/4" Size -04 | 11.6 | 6250 | 430 | 25000 | 1725 | 3500 | 0.17 | <u>100</u> |
| 2340N-04V91 | | 12.5 | 10000 | 690 | 40000 | 2760 | 3500 | 0.23 | <u>150</u> |
| 2380N-04V91 | | 13.4 | 10000 | 690 | 40000 | 2760 | 3200 | 0.27 | <u>220</u> |
| 2440N-04V91 | | 13.1 | 12500 | 875 | 50000 | 3500 | 3200 | 0.31 | <u>260</u> |
| 2448N-04V91 | | 13.7 | 15000 | 1035 | 60000 | 4140 | 3000 | 0.38 | <u>445</u> |
| 2370N-06V91 | 9.5 mm 3/8" Size -06 | 16.5 | 6250 | 430 | 25000 | 1725 | 2500 | 0.33 | <u>90</u> |
| 2370N-06V91-10K* | | 16.5 | 10000 | 690 | 25000 | 1725 | 2500 | 0.33 | <u>90</u> |
| 2390N-06V91 | | 18.1 | 6450 | 445 | 25800 | 1780 | 3200 | 0.41 | 150 |
| 2380N-06V91 | | 17.9 | 7500 | 517 | 30000 | 2070 | 2500 | 0.44 | 300 |
| 2440N-06V91 | | 19.5 | 12500 | 875 | 50000 | 3500 | 3200 | 0.73 | <u>320</u> |
| 2390N-08V91 | 12.7 mm 1/2" Size -08 | 21.2 | 6000 | 415 | 24000 | 1660 | 3500 | 0.57 | <u>85</u> |
| 2380N-08V91 | | 22.9 | 7500 | 517 | 30000 | 2070 | 3000 | 0.68 | 230 |
| 2440N-08V91 | | 22.7 | 11745 | 810 | 46980 | 3240 | 3000 | 0.94 | <u>190</u> |
| 2390N-12V91 | 19.1 mm 3/4" Size -12 | 29 | 5000 | 345 | 20000 | 1380 | 3200 | 0.9 | 75 |
| 2440N-12V91* | | 30.2 | 10000 | 690 | 36250 | 2500 | 2000 | 1.47 | <u>80</u> |
| 2640N-12V91 | | 33.2 | 12500 | 875 | 50000 | 3500 | 1800 | 2.16 | <u>120</u> |
| 2390N-16V91 | 25.4 mm 1" Size -16 | 35 | 4060 | 280 | 16240 | 1120 | 3200 | 1.17 | <u>39</u> |
| 2440N-16V91 | | 37.2 | 8120 | 560 | 32625 | 2250 | 2000 | 1.9 | <u>60</u> |
| 2440N-16V91-10K* | | 37.2 | 10000 | 690 | 32625 | 2250 | 2000 | 1.9 | <u>60</u> |

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

1.1 Large bore hoses with additional TPU outer jacket, “ColorGard™”

| Hose Part No. | Nominal I.D. | Nominal O.D. (mm) | Working Pressure | | Burst Pressure | | Max. Manufact. Length (m) | Weight in Air (kg/m) | Collapse Pressure (bar) |
|-------------------------------|---------------------------|-------------------|------------------|------|----------------|------|---------------------------|----------------------|-------------------------|
| | | | psi | bar | psi | bar | | | |
| 2640N-24V80* | 38.1 mm | 70.5 | 10000 | 690 | 33350 | 2300 | 600 | 7.2 | <u>65</u> |
| 2640N-24V80-KOP* | 1-1/2" | 70.5 | 15000 | 1035 | 33750 | 2330 | 600 | 7.2 | <u>65</u> |
| 2640N-24V80-KOP2* | Size -24 | 66 | 15000 | 1035 | 33750 | 2330 | 600 | 6.5 | <u>65</u> |
| 2448N-32V80 PHalcon 2 | 50.8 mm 2" | 80 | 5000 | 345 | 20000 | 1380 | 1000 | 8.8 | <u>49</u> |
| 2580N-32V80* Black Eagle 2 | Size -32 | 84 | 10000 | 690 | 25000 | 1725 | 1000 | 9.4 | <u>57</u> |
| 2240N-48V80* Black Eagle | 76.2 mm 3" Size -48 | 114 | 5000 | 345 | 12500 | 862 | 350 | 11.5 | 20 |
| 2440N-48V80* Black Eagle | | 122 | 10000 | 690 | 25000 | 1725 | 300 | 18.7 | <u>40</u> |
| 2640N-48V80* Black Eagle | | 130 | 15000 | 1035 | 33750 | 2330 | 250 | 27.5 | 80 |

* Working pressures for these hoses are based on safety factors lower than 4:1.

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

2 ChemJec hoses with fluoropolymer core tube, multiple layers of steel wire and a Nylon outer jacket

Working temperature for these hoses is (-40°F to +212°F) (-40°C to +100°C).

These hoses have an excellent chemical resistance against most of the aggressive chemicals.

| Hose Part No. | Nominal I.D. | Nominal O.D. (mm) | Working Pressure | | Burst Pressure | | Max. Manufact. Length (m) | Weight in Air (kg/m) | Collapse Pressure (bar) (see Notes on pg F-24) |
|----------------|-----------------------------|-------------------|------------------|------|----------------|------|---------------------------|----------------------|---|
| | | | psi | bar | psi | bar | | | |
| 2240M-04V38 | 6.4 mm 1/4" Size -04 | 11.6 | 6250 | 430 | 25000 | 1725 | 3500 | 0,17 | <u>105</u> |
| 2340M-04V38 | | 12.5 | 10000 | 690 | 40000 | 2760 | 3500 | 0,23 | <u>205</u> |
| 2380M-04V38 | | 13.4 | 10000 | 690 | 40000 | 2760 | 3200 | 0,27 | <u>400</u> |
| 2440M-04V38 | | 13.1 | 12500 | 875 | 50000 | 3500 | 3200 | 0,31 | <u>295</u> |
| 2448M-04V38 | | 13.7 | 15000 | 1035 | 60000 | 4140 | 3000 | 0,38 | <u>378</u> |
| 2380M-05V38 | 7.9 mm 5/16" Size -05 | 15.8 | 8700 | 600 | 34800 | 2400 | 2000 | 0,35 | <u>167</u> |
| 2440M-05V38 | | 16.15 | 10000 | 690 | 40000 | 2760 | 2500 | 0,49 | <u>260</u> |
| 2448M-05V38 | | 16.2 | 15000 | 1035 | 60000 | 4140 | 2500 | 0,52 | <u>385</u> |
| 2370M-06V38 | 9.5 mm 3/8" Size -06 | 16.5 | 6250 | 430 | 25000 | 1725 | 2500 | 0,33 | <u>150</u> |
| 2440M-06V38 | | 19.5 | 10000 | 690 | 50000 | 3500 | 3200 | 0,73 | <u>370</u> |
| 2448M-06V38 | | 20.1 | 15000 | 1035 | 60000 | 4140 | 3000 | 0,83 | <u>390</u> |
| 2440M-08V38 | 12.7 mm 1/2" Size -08 | 22.7 | 10000 | 690 | 40000 | 2760 | 3000 | 0,94 | <u>252</u> |
| 2640M-08V38 | | 24.7 | 15000 | 1035 | 60000 | 4140 | 2800 | 1,34 | <u>300</u> |
| 2390M-12V38 | 19.1 mm 3/4" Size -12 | 29.0 | 5000 | 345 | 20000 | 1380 | 3200 | 0,9 | <u>75</u> |
| 2440M-12V38* | | 30.2 | 10000 | 690 | 36250 | 2500 | 2000 | 1,47 | <u>110</u> |
| 2390M-16V38 | 25.4 mm 1" Size -16 | 35 | 4000 | 280 | 16000 | 1120 | 3200 | 1,19 | <u>35</u> |
| 2440M-16V38-5K | | 37.2 | 5000 | 345 | 32625 | 2250 | 2000 | 2,05 | <u>65</u> |

* Working pressures for these hoses are based on safety factors lower than 4:1.

2.1 Large bore hoses with additional TPU outer jacket, "ColorGard™"

| Hose Part No. | Nominal I.D. | Nominal O.D. (mm) | Working Pressure | | Burst Pressure | | Max. Manufact. Length (m) | Weight in Air (kg/m) | Collapse Pressure (bar) (see Notes on pg F-24) |
|--------------------------------|-------------------------------|-------------------|------------------|-----|----------------|------|---------------------------|----------------------|---|
| | | | psi | bar | psi | bar | | | |
| 2640M-24V88* | 38.1 mm 1-1/2" Size -24 | 70.5 | 10000 | 690 | 33350 | 2300 | 600 | 7.2 | <u>65</u> |
| 2448M-32V88 Phalcon 5000 2 | 50.8 mm 2" Size -32 | 80.5 | 5000 | 345 | 20000 | 1380 | 600 | 8.5 | <u>49</u> |
| 2580M-32V80* Golden Eagle 2 | | 84.5 | 10000 | 690 | 25000 | 1725 | 600 | 9.4 | <u>65</u> |

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES29: Technical Matrix for *polyflex* Offshore Hoses

3 SeaWolf® high collapse resistance aramid reinforced hoses with nylon core tube and TPU outer jacket

Working temperature for these hoses is (-40°F to +140°F) (-40°C to +60°C).

For chemical resistances of core tube, see PFDE-ES28 on pg F-29.

| Hose Part No. | Nominal I.D. | Nominal O.D. (mm) | Working Pressure | | Burst Pressure | | Max. Manufact. Length (m) | Weight in Air (kg/m) | Collapse Pressure (bar) (see Notes on pg F-24) |
|---------------|-----------------------------|-------------------|------------------|------|----------------|------|---------------------------|----------------------|---|
| | | | psi | bar | psi | bar | | | |
| 57CR-8-BLU | 12.7 mm 1/2" Size -08 | 30 | 5000 | 34.5 | 20000 | 1380 | 200 | 0.94 | 230 |
| 57CR-16-BLU | 25.4 mm 1" Size -16 | 51 | 5000 | 34.5 | 20000 | 1380 | 200 | 2.17 | 210 |

4 Hoses with methanol washed Nylon 11 core tube, multiple aramid yarn braids and a TPU outer jacket

Working temperature for these hoses is (-40°F to +130°F) (-40°C to +55°C).

For chemical resistances of core tubes, see PFDE-ES28.

| Hose Part No. | Nominal I.D. | Nominal O.D. (mm) | Working Pressure | | Burst Pressure | | Max. Manufact. Length (m) | Weight in Air (kg/m) | Collapse Pressure (bar) (see Notes on pg F-24) |
|----------------------|-----------------------------|-------------------|------------------|------|----------------|------|---------------------------|----------------------|---|
| | | | psi | bar | psi | bar | | | |
| 2022N-04V91-5K | 6.4 mm 1/4" Size -04 | 12.7 | 5000 | 34.5 | 20000 | 1380 | 2000 | 0.12 | <u>50</u> |
| 2022N-04V91-10K-13MM | | 12.9 | 10000 | 69.0 | 40000 | 2760 | 3000 | 0.12 | <u>75</u> |
| 2022N-04V91-10K | | 13.8 | 10000 | 69.0 | 40000 | 2760 | 2500 | 0.14 | <u>60</u> |
| 2022N-06V91-5K | 9.5 mm 3/8" Size -06 | 16.1 | 5000 | 34.5 | 20000 | 1380 | 2000 | 0.15 | <u>14</u> |
| 2022N-06V91-10K | | 19 | 10000 | 69.0 | 40000 | 2760 | 2000 | 0.19 | <u>40</u> |
| 2022N-08V91-5K | 12.7 mm 1/2" Size -08 | 20.8 | 5000 | 34.5 | 20000 | 1380 | 2000 | 0.17 | <u><10</u> |
| 2022N-08V91-10K | | 23.2 | 10000 | 69.0 | 40000 | 2760 | 1500 | 0.34 | <u>19</u> |

* Working pressures for these hoses are based on safety factors lower than 4:1.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

PARKER ENGINEERING MANUAL

Instructions for Handling, Maintenance, Inspection and Repair of *polyflex* 1"-3" Large Bore Hoses and Assemblies Used in Oil & Gas Applications

Parker Publication No. PFDE-ES28

Revised: October 2014

1 Scope

This engineering standard is focused mainly on larger bore (1"-3"), long length Parker Polyflex multispiral wire-reinforced hoses used in well service operations. It is also relevant for shorter length hose assembly applications such as chemical injection, stimulation, cementing, flexible and testing lines. It provides information on recommended practices for handling, maintenance, inspection, and repair of hose assemblies.

Deployed as single line hoses or used in bundles, these hoses are available in sizes from 3/16" to 3" inside diameter with working pressures up to 1035 bar / 15,000 psi and continuous lengths greater than 3000 m, depending on size.

Hose can be self-supporting, clamped, supported by a guide wire or strengthened with an additional tensile reinforcement.

Parker Polyflex have certified several specialized testing facilities and their personnel to assemble, inspect, test and repair hose assemblies. Hose management is an essential part of the service they provide.

SAE J1273, ISO 17165-2, API RP 17B and ISO 13628 are excellent documents providing general guidelines for selection, routing, fabrication, installation, replacement, maintenance, and storage of hose and hose assemblies. Together with Parker Polyflex field experience, they provide the basis for the recommendations included in this engineering standard.

2 Hose Features

Parker Polyflex Oil & Gas multispiral wire-reinforced hoses have been used for over 30 years in both onshore and offshore applications. They are proven to be tough, easy to handle, lightweight (compared with alternatives), and offer excellent chemical resistance, integral external collapse, ozone and microbiological resistance.

In extreme, abrasive applications, Polyflex offers an additional extra thick ColorGard™ sheath incorporating a dual color "early warning" safety feature.

2.1 Design Life

Parker Polyflex large bore hoses are designed for prolonged service life. The prerequisite for this design life is that the hoses are used within the operating limits stated in the hose specification sheets. These limits include, but are not limited to, working pressure, number of pressure cycles, temperature range and bending radius.

In order to ensure a long service life, Parker Polyflex incorporates a combination of raw material suppliers testing and data, fatigue testing, and accelerated and specialized testing into the design of the hoses.

Obviously, due to many other factors affecting the service life, it is not possible to predict or guarantee service life of each individual hose assembly.

These factors may include, but are not limited to, mechanical loads (bending, torsion, tensile loads), frequent changes of temperature within the specified range, improper handling and storage, chemical attack, abrasive fluids, hose damage etc.

A Hose

B Fittings

C Adapters & Valves

D Quick Couplings

E Accessories

F General Technical

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

3 Storage

Hoses and hose assemblies should be stored, wherever possible, empty and protected from the elements in a stress free condition either straight, in a coil, or on a drum. The inside diameter of the coil or drum should not be less than two times the minimum bend radius. If a hose assembly has been used with chemicals, it shall be flushed with water before putting it to storage (see also 5.4).

Example: hose with minimum bend radius 800 mm; minimum size of drum core/belly should be $2 \times 800 \text{ mm} = 1.6 \text{ m}$.

The fittings should be capped to prevent ingress of dirt or other contamination and any exposed threads protected from damage.

Storage of hoses and hose assemblies should take into account potential exposure to corrosive liquids, rodents, insects, UV light and high temperatures. Storage temperatures should be in the range of hose operating temperatures.

4 Handling

4.1 Personnel

Only trained personnel shall handle and connect hose assemblies.

Incorrect handling will seriously reduce the lifetime of the hose and could cause dramatic failure. The use of wire rope or chains directly against the outer cover should be avoided, and the routing of the assembly should ensure the hose is never bent below its minimum bend radius or twisted. Special attention should be paid to the area at the back of the fitting.

4.2 Spooling and Reeling

When reeling long length hose onto a drum it is essential to minimize the tension on the hose. Proof testing of a “stretched” hose while on the drum can cause premature failure of the hose or damage to the drum.

When operating from a vessel it is recommended that the hose is pressurized during the subsea deployment and retrieving operation. This

recommendation is based on the fact that during these operations the hose is always subjected to tensile force, at least due to its own weight. Tensile forces will result in hose elongation and possible deformation.

This is significantly reduced by pressurizing the hose, especially important if it is planned to proof test the hose assembly while coiled on a drum or winch. Deployment and retrieving pressures up to 200 bar had been found to be sufficient but this depends on the hose type and local safety regulations. For recommendations of pressure / load values see Appendix 2.

When re-spooling a long length assembly, the pay-off and take-up drums should be inline and a minimum of 10m apart. Depending on how the hose was delivered or re-spooled, the hose shall be spooled from either the top of the pay-off drum onto the top of the take-up drum or from bottom to bottom. (See Fig. 1 and Fig. 2 on next page.) These recommendations minimize the possibility of inducing twist into the hose.

When re-spooling a new hose that has a polyurethane cover, it is recommended to lubricate the hose cover with soapy water or other suitable lubricant so the hose will traverse more easily and position itself correctly onto the take-up drum/winch. See Fig. 1 (next page).

It is also recommended, when deploying the hose through a moon pool or over the side of a vessel, to align the hose routing in the same manner. See Fig. 2 (next page).

Note:

When first supplied, the layline printed on the hose is normally straight and visible. Twisting of the layline is an early indication of poor alignment or high tensile loading.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Hose
A

Fittings
B

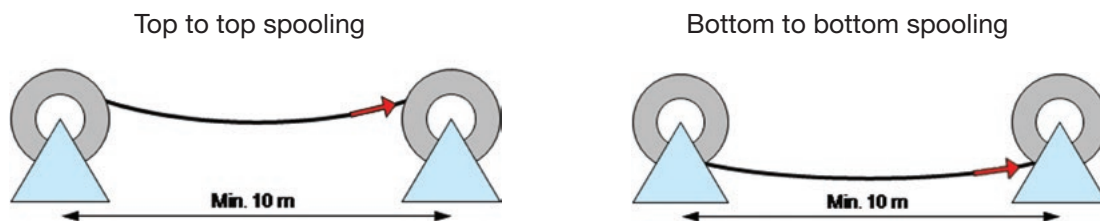


Fig. 1 Hose re-spooling

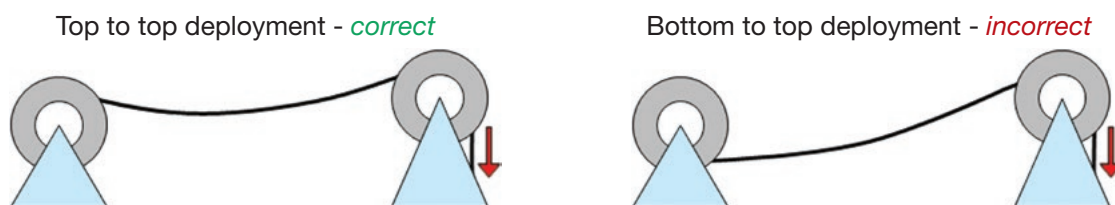


Fig. 2 Hose deployment

5 Possible causes of premature failure, and suggested preventative measures

5.1 Bending the hose below the minimum bend radius

This is most likely to occur if the end fitting is not supported during lifting, a support sling wrongly positioned, or the hose being pulled around a tight corner. It is important that hose should not be bent close to the end fittings. The straight section should be at least two times the outside diameter of the hose before it starts to bend.

Bend restrictors, lifting clamps and containment grips are useful accessories that help to reduce this type of handling problem.

5.2 Damage of the hose cover

Polyflex ColorGard™ extra thick, dual colour cover significantly reduces the risk of exposing the reinforcing wires. If the outer black cover has been abraded to the point that the “early warning” red inner cover can be seen, but the wire reinforcement has not been exposed, the assembly is still fit for use but shall be scheduled for inspection. Alternatively, a repair according to section 8.1.1 may be considered.

If the hose cover is damaged to the extent that

the reinforcing wires are exposed, localized corrosion of the wires could occur causing a progressive reduction in burst pressure, and ultimately failure.

If used subsea, a damaged cover will allow water to ingress into the carcass of the hose and could cause the corrosion of the wire reinforcement and/or collapse of the core tube.

It is strongly recommended to immediately remove from service any hose assembly with exposed wires. See also section 8.1.2 for details. A Parker Polyflex specialized testing facility should be contacted and the procedure described in section 7.1 shall be followed.

5.3 Kinked, crushed or twisted hose

If a visible distortion of the hose occurred (kinked, crushed, twisted) it will have an impact on the function and lifetime of the hose. Reduction of burst pressure and external collapse pressure could result in a sudden failure of the hose assembly. This distortion can be caused by a high tensile load or other factors.

Maintaining pressure in the hose will significantly reduce the risk of such distortion occurring.

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

5.4 Chemical attack or aging of the core tube

The use of chemicals at differing concentrations and/or temperatures can have a major effect on the life of a hose assembly and may cause dramatic hose failure. It is important to reference the chemical compatibility chart in the appendix of this document and keep the temperatures and concentrations within the specified limits.

Note:

It is critical that the hose is thoroughly flushed with water after each use.

If the hose is not flushed, the concentration of the fluid that is left in the assembly can increase and cause localised failure of the core tube.

5.5 Damage or corrosion of the end fitting

Incorrect handling or insufficient flushing after use could result in damage or corrosion of the end fitting. This will make connection difficult, probably cause leakage, and could result in sudden failure of the connection.

5.6 Flow rates

Depending on the abrasive properties of the fluid, high flow rates can result in erosion in the core tube or in the bore of the end fitting.

The maximum recommended flow rate is 15 m/sec, although much higher rates have been used short term with non abrasive fluids.

Note:

The condition of the core tube and end fittings are checked as part of the full inspection.

6 Routine in-field pre-job and post-job maintenance, inspection and testing

6.1 Routine in-field pre-job maintenance, inspection and testing

The operator shall visually inspect the hose assembly during every deployment. If any of the following conditions are found the hose shall be removed from service and scheduled for inspection.

- Damage to the outer cover which exposes the reinforcing wires.
- Kinked, crushed, or twisted hose.
- Reduction in the outside diameter of the hose.
- Blistered, soft, degraded, or loose outer cover.
- Cracked, damaged, or badly corroded fittings.

If in doubt, contact the original supplier or a Parker Polyflex specialized testing facility for advice.

Regular in-field pressure testing, (normally required after attaching connectors prior to hose deployment), should be restricted to a test pressure of 1,1× actual operating pressure, or the maximum stated working pressure of the hose assembly.

Prior to all pressure testing it must be ensured that all air is purged out of the hose. Failure to do so may result in core tube failure. To control that all air is removed it is sufficient to observe that the fluid flow leaving the hose is steady and constant for minimum of 5 minutes without any air bubbles or pulsations.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Hose
A

6.2 Routine in-field post-job maintenance, inspection and testing

On completion of each operation both inside and outside hose surfaces should be flushed/cleaned with sufficient clean water to ensure that all chemicals or residues are fully removed from the hose assembly.

The operator shall visually inspect the hose assembly during every recovery. If any of the following conditions are found the assembly shall be removed from service and scheduled for inspection.

- Damage to the outer cover which exposes the reinforcing wires.
- Kinked, crushed, or twisted hose.
- Reduction in the outside diameter of the hose.
- Blistered, soft, degraded, or loose outer cover.
- Cracked, damaged, or badly corroded fittings.

If in doubt, contact the original supplier or a Parker Polyflex specialized testing facility for advice.

6.3 Recertification of hose assemblies

Parker Polyflex recommend that all hose assemblies shall be returned to the original supplier or a Parker Polyflex specialized testing facility at least once a year for full inspection/recertification.

The supplier will issue a report detailing the condition of the assembly, and recommend recertification, repair, or replacement.

7 Procedure for full inspection

In addition to the standard marking (WP, month and year of production, hose assembly manufacturer and serial number) all hose assemblies will be marked with the recertification date (RECERT. MM/YYYY).

It is the responsibility of the purchaser to track the location of the hose assembly and the responsibility of the supplier to inform the purchaser a month before the hose assembly is due for full inspection/recertification.

Parker Polyflex have trained and certified specialized facilities and their personnel to assemble, inspect, test, repair and recertify hose assemblies.

Hose management is an essential part of the service they provide.

The history of each assembly must be logged showing the results of previous inspections and any repairs.

7.1 Customer pre-dispatch procedure before returning a hose assembly for inspection/repair

- The object is to make sure the hose assembly can be safely handled and the condition of the assembly will justify the transportation and inspection costs.
- The chosen inspection facility should be contacted if doubtful about any of the points below.
- Check and record assembly serial number (send information to test facility).
- Assembly must be free of chemical residues inside and outside (could result in refusal to handle returned assembly).
- Report on any findings out of section 6.1
- Method of transport, size and weight, (long length hose assemblies on drums or reels may require special handling equipment such as drums and re-spooling machinery).
- Customer will receive a budget price for inspection based on the information given by the end user.

Fittings
B

Adapters & Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

7.2 Full inspection of the returned hose assembly includes the following:

- Safety inspection, condition of assembly as received.
 - o Check for chemical residue inside and outside (may require flushing or cleaning).
 - o Assembly serial number (check assembly history including previous repairs).
- External inspection
- Internal inspection
- Inspection report

7.2.1 External inspection

- Damage to the outer cover (abrasion, incorrect routing)
- Exposed reinforcing wires. (damaged outer cover)
- Kinked, crushed, or twisted hose. (high tensile loading, incorrect routing)
- Reduction in the outside diameter of the hose (high tensile loading with no pressure)
- Blistered, soft, degraded, or loose outer cover. (chemical attack, leaking fitting, permeation or high temperature)
- Cracked, damaged, or badly corroded fittings (chemical attack, poor handling, old hose assembly)
- Damage or wear on fitting threads (poor handling, old hose assembly)
- Condition of containment grips / clamps. (abrasion, frayed wires, distortion)

7.2.2 Internal inspection

Internal inspection shall be done with an endoscope.

- Check for damage to bore of fittings, cracks, severe abrasion, corrosion.
- Check condition of core tube at the back of fittings (critical area).
- Scope maximum length of the core tube possible. Recommended minimum is 10 m both sides.

- Hose assemblies shorter than 20 m should be scoped on the complete length.
- Look for uneven surface (sign of wire fatigue, abrasion, chemical attack).

7.2.3 Inspection report

The testing facility will advise on the overall condition of the hose and end connections. Customer will receive detailed report of the findings, including recommended actions:

- repair
- recertification
- scrapping

8 Procedure for repair and recertification

8.1 Repair

It is recommended, that all repairs are done by certified specialized testing facilities. Some repairs (see examples below) could be done in field. Be sure to maintain safety requirements.

8.1.1 Twisted hose, hose with reduced O.D., flattened hose

A hose with signs of twisting or deformation will need to be unreeled, as straight as possible, from the winch/drum in a safe environment and pressurized to working pressure for at least 1 hour and then pressure released. The hose shall be re-inspected to see if the hose has returned to its “untwisted, undistorted” original shape. If so, the hose should be again pressurized before rewinding back onto the winch/drum. Any sections of hose still misshapen should be cut out of the assembly.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Hose
A

8.1.2 Hose with cover damage

- No reinforcement wires exposed.

Temporary solution, the damaged area can be cleaned and protected by wrapping with a strong adhesive “duct / riggers” tape. If abraded to the point where the red ColorGard is visible, the damaged area should be thoroughly cleaned with mild solvent, a thin plastic sheet wrapped around the hose to form a mould. A two pack polyurethane mixture can then be poured into the mould and allowed to set. Remove mould after the polyurethane is set.

- Reinforcement wires exposed.

It is strongly recommended to remove the hose assembly from service immediately. Any ingress of water into hose carcass will initiate corrosion of the reinforcement wire. It is difficult to estimate the rate of corrosion. At best, the hose could function for months, at worst, possibly less than one week. It is also possible that the core tube could have collapsed if the external pressure acting within the carcass is greater than internal pressure within the hose.

In any case, the lifetime of the hose assembly will be significantly reduced, and the hose assembly shall be immediately scheduled for inspection at certified specialized testing facility.

Decision to further use a hose assembly with exposed wire shall be based on a proof pressure test for 1,1× maximum working pressure of the hose assembly. This test shall be conducted prior to every further job.

Repair of such a hose assembly is possible, but it will include cutting out the section of the hose, where the wires have been subjected to water. Obviously, this will require new fittings to be crimped and hose assembly to be proof pressure tested. Procedure for proof pressure testing in this case is specified in the assembly instructions for the appropriate hose type.

After successfully passing pressure test, hose assembly shall be permanently marked with the new recertification date (see section 7).

The testing facility will recommend if the condition of the hose warrants the cost of assembling new fittings, joining the lengths together and proof testing.

8.2 Recertification

Recertification shall include full inspection acc. to section 7.2 and a hydrostatic pressure test.

Unless otherwise agreed between customer and test facility, test conditions are:

Test pressure = 1.5× maximum working pressure of hose assembly. Allow for at least 30 minutes stabilization time before starting recording pressure decay.

Pressure hold time = 1 hour

Pressure decrease of maximum 5% is allowed.

After successfully passing pressure test, hose assembly shall be permanently marked with the new recertification date (see section 7).

The maximum number of pressurizations to 1.5× maximum working pressure is limited to 20.

Note:

The 20 × 1.5 WP pressurizations is likely to be a combination of annual inspections, re-ending damaged fittings, or cutting off damaged hose. Example 1 – undamaged hose and fittings tested once a year give an estimated lifetime of 20 years. Example 2 - after 5 years, – fitting re-ended 4 times, hose damaged 3 times, 5× annual pressurizations at 1.5 x WP (tip, re-ending of both fittings would only require one pressure test) result in the total number of pressurizations at 1.5 × WP of 12.

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Appendix 1: Chemical Resistance Chart

The below chart contains chemical resistance information for Polyamide 11 (Nylon 11) and Fluoropolymer.

These are the most common core tube materials used for Parker Polyflex oil & gas hoses. Please refer to the hose datasheets for more detailed information.

Rating Codes

| | | |
|----------|----------------|---|
| E | Excellent | Good to excellent. Little or no swelling, tensile or surface change. Preferred choice. |
| A | Good | Good to excellent. Little or no swelling, tensile or surface change. Limitations with temperature and type of fluid. |
| B | Limited | Marginal or conditional. Noticeable effects but not necessary indicating lack of serviceability. Further testing is suggested for specific application. Very long-term effects. |
| X | Unsatisfactory | Poor or unsatisfactory. Not recommended without extensive and realistic testing. |
| - | | Indicates that this was not tested. |
| * | Swelling | Increase of volume of material, due to absorption of a solvent. |

Material Code for Hose Core Tube

N Polyamide

M Coextruded core tube with Fluoropolymer inner liner

Notes on Chemical Resistance Table

The chemical resistance table is a simplified rating tabulation based on immersion tests. Higher temperatures tend to reduce ratings. Since final selection depends on pressure, fluid, ambient temperature and many other factors not known to Parker Hannifin, no performance guarantee is expressed or implied.

The indications do not imply any compliance with standards and regulations and do not refer to possible changes of colour, taste or smell.

Some hose applications must take into account legal and insurance regulations. The chemical resistance indicated does not express or imply approval by certain institutions.

Chemical resistance does not imply low permeation rates.

For gas applications, the cover may be pin-pricked. Pin-pricking reduces the potential of cover blistering due to permeation. However, pin-pricked wire reinforced hoses are not suitable for subsea use. Parker Polyflex wire reinforced hoses may be used without pin-pricking. In this case, time of permanent use with gas should be limited to 30 days. Hoses with ColorGard will not be pin-pricked. No special precautions on decompression rate are required, however, explosive decompression rate (>200 bar/sec) is not recommended. Note that hoses with coextruded core tube with Fluoropolymer inner liner are not recommended for gas applications.

For fluids, not listed or for advice on particular applications, please contact Parker Hannifin, Polyflex Division in Lampertheim, Germany.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

| Chemical | Concentration | N | | | | M |
|----------------------|--------------------|----------------|-----------------|-----------------|-----------------|------------------|
| | | 20°C (68°F) | 40°C (104°F) | 60°C (140°F) | 90°C (194°F) | 100°C (212°F) |
| Acetaldehyde | | A | B | X | X | A |
| Acetic Acid | 5% | A | A | A | B | E |
| Acetic Acid | 10% | A | A | B | X | E |
| Acetic Acid | 50% | B | X | X | X | E |
| Acetic Anhydride | | B | X | X | X | E |
| Acetone | Pure | A | A | B | X | A |
| Acetylene | | A | A | A | - | A |
| Air | | A | A | A | A | A |
| Aluminium Sulfate | Saturated Solution | A | A | A | A | A |
| Ammonia | Liquid or Gas | A | A | A | X | A |
| Ammonium Chloride | | A | A | A | - | A |
| Ammonium Hydroxide | Concentrated | A | A | A | A | A |
| Ammonium Nitrate | | A | A | A | A | A |
| Ammonium Sulfate | Saturated Solution | A | A | B | - | E |
| Amyl Acetate | | A | A | A | B | A |
| Aniline | | B* | X | X | X | E |
| Asphalt | | A | A | A | A | A |
| Barium Chloride | Saturated Solution | A | A | A | A | A |
| Benzaldehyde | | A | B | X | X | E |
| Benzene | | A | A* | B | X | E |
| Butane | | A | A | A | A | A |
| Butyl Alcohol | | A* | B | X | X | E |
| Calcium Arsenate | | A | A | A | - | A |
| Calcium Chloride | Saturated Solution | A | A | A | A | A |
| Calcium Nitrate | | A | A | A | - | A |
| Camphor | | A | - | - | - | A |
| Carbon Dioxide | | A | A | A | A | A |
| Carbon Monoxide | | A | A | A | A | A |
| Carbon Disulfide | | A* | B* | B | X | A |
| Carbon Tetrachloride | | X | X | X | X | A |
| Cement Slurries | | A | A | A | - | A |
| Chlorinated Solvents | | B | X | X | X | E |
| Chloroform | | B | X | X | X | E |
| Chromic Acid | | X | X | X | X | E |
| Citric Acid | Saturated Solution | A | A | B | X | E |
| Copper Sulfate | | A | A | A | A | A |
| Cyclohexane | | A | A | A | B | A |
| Cyclohexanol | | A | B | X | X | E |

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

| Chemical | Concentration | N | | | | M |
|--|---------------|----------------|-----------------|-----------------|-----------------|------------------|
| | | 20°C (68°F) | 40°C (104°F) | 60°C (140°F) | 90°C (194°F) | 100°C (212°F) |
| Cyclohexanone | | A | B | X | X | E |
| Diammonium Phosphate | | A | A | B | - | E |
| Dichloroethylene | | B | X | X | X | E |
| Diesel | | A | A | A | A | A |
| Diester Oils | | A | A | A | B | A |
| Diethanolamine | 20% | A | A* | A* | B | A |
| Diethyl Ether | | A | - | - | - | E |
| Dioctylphthalate | | A | A | A | B | A |
| Ethanol | Pure | A* | B | B | X | E |
| Ethyl Acetate | | A | A | A | - | A |
| Ethylene Glycol | | A* | A* | B | X | E |
| Ethylene Oxide | | A | A | X | X | E |
| Fatty Acid Esters | | A | A | A | A | A |
| Formaldehyde | Technical | A | B | X | X | E |
| Formic Acid | 10% | X | X | X | X | E |
| Furfuryl Alcohol | | A | A* | B | X | E |
| Gas (Coal) | | A | A | - | - | A |
| Gasoline (High Octane) | | A | A | A* | - | A |
| Glucose | | A | A | A | A | A |
| Glycerine | Pure | A | A | B | X | E |
| Glycol | | A | A | B | X | A |
| Heptane | | A | A | A* | - | A |
| Hexane | | A | A | A | A | A |
| Hydrogen | | A | A | A | A | A |
| Hydraulik Fluid (petroleum base) | | A | A | A | A | A |
| Hydraulik Fluid (phosphate ester base) | | A | A | A | B | A |
| Hydraulik Fluid (water base) | | A | A | A | A | A |
| Hydrogen Peroxide | 20% | A | B | - | - | E |
| Hydrochloric Acid | 15% | A | B | X | X | E |
| Hydrochloric Acid | 28% | X | X | X | X | E |
| Hydrochloric Acid | 37% | X | X | X | X | A |
| Hydrofluoric Acid | 3% | A | B | X | X | E |
| Isocyanates | | B | X | X | X | E |
| Isooctane | | A | A | A | A | A |
| Isopropyl Alcohol | | A | B | X | X | E |
| Kerosene | | A | A | A* | B | A |

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.



PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

| Chemical | Concentration | N | | | | M |
|------------------------|---------------|----------------|-----------------|-----------------|-----------------|------------------|
| | | 20°C (68°F) | 40°C (104°F) | 60°C (140°F) | 90°C (194°F) | 100°C (212°F) |
| Lactic Acid | | A | A | A | B | E |
| LP Gas | | A | A | A | A | E |
| Magnesium Chloride | 50% | A | A | A | A | A |
| Mercury | | A | A | A | A | A |
| Methane | | A | A | A | A | E |
| Methanol | Pure | A | B | B* | X | E |
| Methyl-Cellosolve | | A | A | A | X | A |
| Methyl Acetate | | A | A | A | - | A |
| Methyl Bromide | | A | X | X | X | E |
| Methyl Chloride | | A | X | X | X | E |
| Methyl Sulfate | | A | B | - | - | E |
| Methyl Ethyl Ketone | | A | A | B | X | - |
| Methyl Isobutyl Ketone | | A | A | B | X | E |
| Methylene Chloride | | X | X | X | X | A |
| Monochlorobenzene | | B | X | X | X | A |
| Naphta | | A | A | A | - | A |
| Naphtalene | | A | A | A | B | A |
| Natural Gas | | A | A | A | A | E |
| Nitric Acid | | X | X | X | X | A |
| Nitrobenzene | | B | X | X | X | A |
| Nitrogen Gas | | A | A | A | A | E |
| Oil Crude | | A | A | A | B | A |
| Oils Refined | | A | A | A | B | A |
| Oleic Acid | | A | A | A | B | A |
| Oxalic Acid | | A | A | B | X | E |
| Oxygen Gas | | A | A | B | X | A |
| Perchloric Acid | | B | X | X | X | B |
| Perchloroethylene | | B | X | X | X | E |
| Petroleum Ether | | A | A | A | B | E |
| Phosphoric Acid | 50% | A | B | X | X | E |
| Picric Acid | | B | X | X | X | E |
| Potassium Carbonate | | A | A | B | X | E |
| Potassium Chloride | | A | A | B | X | E |
| Potassium Hydroxide | 50% | A | B | X | X | E |
| Potassium Nitrate | | A* | B* | X | X | E |
| Potassium Sulfate | | A | A | A | A | A |
| Propane | | A | A | A | A | A |
| Propylen Glycol | | A | B | X | X | A |

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

| Chemical | Concentration | N | | | | M |
|--------------------------|--------------------|----------------|-----------------|-----------------|-----------------|------------------|
| | | 20°C (68°F) | 40°C (104°F) | 60°C (140°F) | 90°C (194°F) | 100°C (212°F) |
| Pydraul F9 | | A | A | A | - | A |
| Pyridine | Pure | B | X | X | X | E |
| Sodium Borate | | A | A | A | - | A |
| Sodium Carbonate | Saturated Solution | A | A | B | X | E |
| Sodium Chloride | Saturated Solution | A | A | A | A | A |
| Sodium Hydroxide | 50% | A | B | X | X | E |
| Sodium Hypochlorite | Concentrated | B | X | X | X | E |
| Sodium Hypochlorite | Dilute Commercial | A | B | X | X | E |
| Sodium Sulfide | | A | A | B | - | E |
| Stearin | | A | B | B | - | E |
| Stearic Acid | | A | A | A | B | A |
| Styrene Monomer | | A | A* | - | - | E |
| Sulphur Dioxide | | B | X | X | X | A |
| Sulphur Hexafluoride Gas | | A | A | A | A | A |
| Sulphuric Acid | 10% | A | B | X | X | A |
| Sulfic Anhydride | | B | X | X | X | E |
| Tartaric Acid | | A | A | A | B | A |
| Tetraethyl Lead | | A | - | - | - | E |
| Tetrahydrofurane | | A | A | B | X | E |
| Toluene | | A | A* | B | B | E |
| Trichloroethane | | B | X | X | X | E |
| Trichloroethylene | | B | X | X | X | E |
| Tricresyl Phosphate | | A | A | A | B | A |
| Tributyl Phosphate | | A | A | A | B | A |
| Trisodium Phosphate | | A | A | A | A | A |
| Triphenyl Phosphate | | A | A | B | - | A |
| Turpentine | | A | A | B | - | A |
| Urea | | A | A | B | B | E |
| Uric Acid | | A | A | A | B | A |
| Vinegar | | A | A | A | - | A |
| Water | | A | A | A | A | A |
| Water Glycols | | A | A | A | B | A |
| Water, Sea | | A | A | A | A | A |
| Water, Soda | | A | A | A | A | A |
| Xylene | | A | A* | B | B | E |
| Zinc Chloride | | A | A | B | X | E |

Hose
AFittings
BAdapters &
Valves
CQuick Couplings
DAccessories
EGeneral Technical
F

For detailed ordering information, please consult price list or contact Parflex Division.

PFDE-ES28: Handling, Maintenance and Inspection of *polyflex* Offshore Hoses

Appendix 2: Data for Tensile Loading and Weights of Polyflex Hoses

Note that all below values of tensile forces include the own weight of the hoses.

Pressurized hose can take higher tensile load, it will elongate less. All values below have been confirmed by testing. In all cases the hoses will not elongate more than 10%.

| | | | | | |
|--------------------|-------------------------|----|---------------|---------------|---------------|
| 2448N-32V80 | Pressure [bar] | 0 | 100 and above | | |
| | Max. tensile force [kN] | 15 | 20 | | |
| 2580N-32V80 | Pressure [bar] | 0 | 100 | 200 | 300 and above |
| | Max. tensile force [kN] | 25 | 30 | 35 | 40 |
| 2240N-48V80 | Pressure [bar] | 0 | 100 and above | | |
| | Max. tensile force [kN] | 15 | 20 | | |
| 2440N-48V80 | Pressure [bar] | 0 | 100 | 200 and above | |
| | Max. tensile force [kN] | 30 | 40 | 50 | |
| 2640N-48V80 | Pressure [bar] | 0 | 100 | 200 | 350 and above |
| | Max. tensile force [kN] | 30 | 40 | 50 | 100 |

In the table below some figures are put together for information.

| | Hose ID (mm) | Hose OD (mm) | Hose weight in air empty (kg/m) | Hose weight in air, full of water (kg/m) | Hose weight in water empty (kg/m) | Hose weight in water full of water (kg/m) |
|-------------|--------------|--------------|---------------------------------|--|-----------------------------------|---|
| 2448N-32V80 | 50.5 | 80.5 | 8.5 | 10.5 | 3.3 | 5.3 |
| 2580N-32V80 | 50.5 | 84.5 | 9.4 | 11.5 | 3.7 | 5.7 |
| 2240N-48V80 | 75.0 | 114.0 | 11.5 | 16.0 | 1.1 | 5.6 |
| 2440N-48V80 | 75.0 | 122.0 | 18.7 | 23.2 | 6.7 | 11.3 |
| 2640N-48V80 | 75.0 | 130,0 | 27.5 | 32.0 | 14.0 | 18.4 |


1st Example: No pressure. 300 m length of 2240N-48V80 shall be deployed. Hose weight in water, full of water, $5,6 \text{ kg/m} \times 300 \text{ m} = 1680 \text{ kg}$. Max tensile force is 15 kN, therefore a 300m length is too heavy to deploy in these conditions.

2nd Example: Pressure 100 bar. 300 m length of 2240N-48V80 shall be deployed. Hose weight in water, full of water, $5,6 \text{ kg/m} \times 300 \text{ m} = 1680 \text{ kg}$ max. tensile force is 20 kN, so a 300 m length of 2240N-48V80 is OK to deploy when pressurized at 100 bar, and an additional weight of $2000-1680=320 \text{ kg}$ may be added.


NOTE: Appendix 2 chemical charts are located in the on-line brochure 4900-PFDE-ES28, followed by Appendix 3. Choose the link below for immediate access.

TAKE ME TO 4900-PFDE-ES28

Twin Line and Multi-Line Separation Instructions

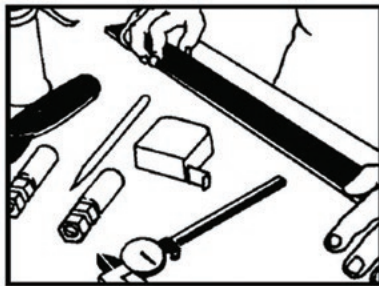


1. Position the twinned or multi-line hose assembly so that it lies flat on work surface without tendency to twist or turn.

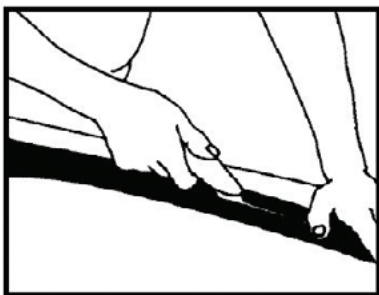


4. Press the multi-line hose assembly firmly and flat against the work surface with your free hand so that it does not move. Using a Stanley trimming knife, model No. 10-515, or equivalent, draw the knife toward you with constant light to moderate pressure and a smooth stroke. Three or four strokes will be necessary to separate the hoses.

NOTE: It is important that the knife blade be perpendicular to the hose during this procedure so that the blade cuts only the center line of the web. **EXTREME CARE MUST BE TAKEN TO AVOID CUTTING THROUGH THE COVER OF THE HOSES AND THEREBY EXPOSING THE REINFORCEMENT.** If this occurs, the hose assembly must be discarded.

If the separation length is greater than that which can be accomplished with one continuous, smooth stroke, then the procedure should be repeated over shorter distances, always cutting toward the free end of the hoses.

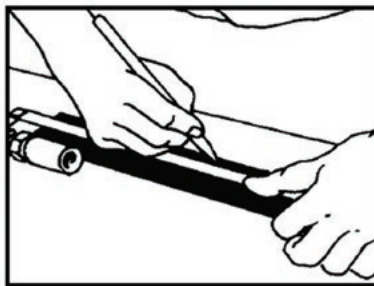


2. Measure and mark the length that the hoses are to be separated.
Note: If length of separation is specified from the threaded or swivel nut end of coupling, deduct the cutoff allowance dimension for the specific style of coupling used. The cutoff allowance is obtainable from the hose fitting tables in Section B or can be calculated by subtracting the insertion depth of the shell from the overall coupling length.

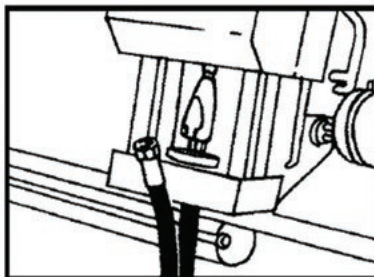


5. It is suggested that the separation length be sufficiently long so that the swaging or crimping operation can be accomplished without risk of kinking the hoses or tearing the web, which could result in exposure of the reinforcement. (See Photo B.)



Do not attempt to pull bonded hoses apart. Hoses must be separated with a blade using the process described above.

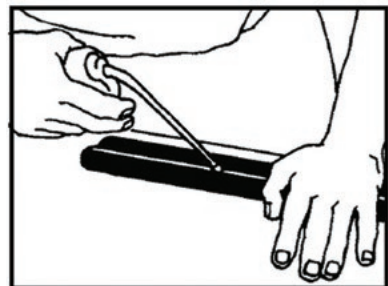

3. Lightly lubricate the web area between the hoses. Distribute the lubricant uniformly along the web of the assembly to be separated. Parker Hoze-Oil or any lightweight oil will suffice. (SAE 10 or 20) The function of the oil is to reduce the friction of the knife blade so that it naturally seeks the center of the valley formed by the hoses. This eliminates the need for the operator to steer the knife.

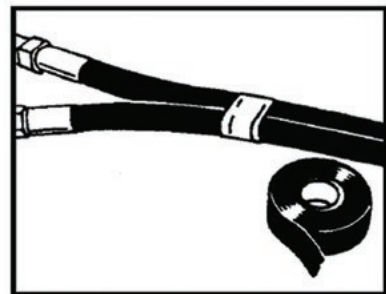

6. At the option of the assembler as dictated by the installation, it is suggested that a nylon lashing strap or tape be applied at the termination of the separated length to provide protection against tearing of the web or hose covers.



The separation length must allow for the swaging or crimping operation without damaging the hose.

Parker Safety Guide

Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings, Connectors, Conductors, Valves and Related Accessories



Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings, Connectors, Conductors, Valves and Related Accessories
Publication No. 4400-B.1
Revised: September 2015

WARNING: Failure or improper selection or improper use of hose, tubing, fittings, assemblies, valves, connectors, conductors or related accessories ("Products") can cause death, personal injury and property damage. Possible consequences of failure or improper selection or improper use of these Products include but are not limited to:

- Fittings thrown off at high speed.
- High velocity fluid discharge.
- Explosion or burning of the conveyed fluid.
- Electrocutation from high voltage electric powerlines.
- Contact with suddenly moving or falling objects that are controlled by the conveyed fluid.
- Injections by high-pressure fluid discharge.

- Dangerously whipping Hose.
- Tube or pipe burst.
- Weld joint fracture.
- Contact with conveyed fluids that may be hot, cold, toxic or otherwise injurious.
- Sparking or explosion caused by static electricity buildup or other sources of electricity.
- Sparking or explosion while spraying paint or flammable liquids.
- Injuries resulting from inhalation, ingestion or exposure to fluids.

Before selecting or using any of these Products, it is important that you read and follow the instructions below. No product from any division in Fluid Connector Group is approved for in-flight aerospace applications. For hoses and fittings used in in-flight aerospace applications, please contact Parker Aerospace Group

GENERAL INSTRUCTIONS

1.0 Scope: This safety guide provides instructions for selecting and using (including assembling, installing, and maintaining) these Products. For convenience, all rubber and/or thermoplastic products commonly called "hose" or "tubing" are called "Hose" in this safety guide. Metallic tube or pipe are called "tube". All assemblies made with Hose are called "Hose Assemblies". All assemblies made with Tube are called "Tube Assemblies". All products commonly called "fittings", "couplings" or "adapters" are called "Fittings". Valves are fluid system components that control the passage of fluid. Related accessories are ancillary devices that enhance or monitor performance including crimping, flaring, flanging, presetting, bending, cutting, deburring, swaging machines, sensors, tags, lockout handles, spring guards and associated tooling. This safety guide is a supplement to and is to be used with the specific Parker publications for the specific Hose, Fittings and Related Accessories that are being considered for use. Parker publications are available at www.parker.com. SAE J1273 (www.sae.org) and ISO 17165-2 (www.ansi.org) also provide recommended practices for hydraulic Hose Assemblies, and should be followed.

1.1 Fail-Safe: Hose, Hose Assemblies, Tube, Tube Assemblies and Fittings can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of the Hose, Hose Assembly, Tube, Tube Assembly or Fitting will not endanger persons or property.

1.2 Distribution: Provide a copy of this safety guide to each person responsible for selecting or using Hose, Tube and Fitting products. Do not select or use Parker Hose, Tube or Fittings without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the Products.

1.3 User Responsibility: Due to the wide variety of operating conditions and applications for Hose, Tube and Fittings. Parker does not represent or warrant that any particular Hose, Tube or Fitting is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:

- Making the final selection of the Products.
- Assuring that the user's requirements are met and that the application presents no health or safety hazards.
- Following the safety guide for Related Accessories and being trained to operate Related Accessories.
- Providing all appropriate health and safety warnings on the equipment on which the Products are used.
- Assuring compliance with all applicable government and industry standards.

1.4 Additional Questions: Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the Products being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2.0 HOSE, TUBE AND FITTINGS SELECTION INSTRUCTIONS

2.1 Electrical Conductivity: Certain applications require that the Hose be nonconductive to prevent electrical current flow. Other applications require the Hose and the Fittings and the Hose/Fitting interface to be sufficiently conductive to drain off static electricity. Extreme care must be exercised when selecting Hose, Tube and Fittings for these or any other applications in which electrical conductivity or nonconductivity is a factor.

The electrical conductivity or nonconductivity of Hose, Tube and Fittings is dependent upon many factors and may be susceptible to change. These factors include but are not limited to the various materials used to make the Hose and the Fittings, Fitting finish (some Fitting finishes are electrically conductive while others are nonconductive), manufacturing methods (including moisture control), how the Fittings contact the Hose, age and amount of deterioration or damage or other changes, moisture content of the Hose at any particular time, and other factors.

The following are considerations for electrically nonconductive and conductive Hose. For other applications consult the individual catalog pages and the appropriate industry or regulatory standards for proper selection.

2.1.1 Electrically Nonconductive Hose: Certain applications require that the Hose be nonconductive to prevent electrical current flow or to maintain electrical isolation. For applications that require Hose to be electrically nonconductive, including but not limited to applications near high voltage electric lines, only special nonconductive Hose can be used. The manufacturer of the equipment in which the nonconductive Hose is to be used must be consulted to be certain that the Hose, Tube and Fittings that are selected are proper for the application. Do not use any Parker Hose or Fittings for any such application requiring nonconductive Hose, including but not limited to applications near high voltage electric lines or dense magnetic fields, unless (i) the application is expressly approved in the Parker technical publication for the product, (ii) the Hose is marked "nonconductive", and (iii) the manufacturer of the equipment on which the Hose is to be used specifically approves the particular Parker Hose, Tube and Fittings for such use.

2.1.2 Electrically Conductive Hose: Parker manufactures special Hose for certain applications that require electrically conductive Hose. Parker manufactures special Hose for conveying paint in airless paint spraying applications. This Hose is labeled "Electrically Conductive Airless Paint Spray Hose" on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in all airless paint spraying applications. Do not use any other Hose for airless paint spraying, even if electrically conductive. Use of any other Hose or failure to properly connect the Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. All hoses that convey fuels must be grounded.

Parker manufactures a special Hose for certain compressed natural gas ("CNG") applications where static electricity buildup may occur. Parker CNG Hose assemblies comply with the requirements of ANSI/IAS NGV 4.2; CSA 12.52, "Hoses for Natural Gas Vehicles and Dispensing Systems" (www.ansi.org). This Hose is labeled "Electrically Conductive for CNG Use"

Parker Safety Guide

on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in, for example, high velocity CNG dispensing or transfer. Do not use any other Hose for CNG applications where static charge buildup may occur, even if electrically conductive. Use of other Hoses in CNG applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. Care must also be taken to protect against CNG permeation through the Hose wall. See section 2.6, Permeation, for more information. Parker CNG Hose is intended for dispenser and vehicle use within the specified temperature range. Parker CNG Hose should not be used in confined spaces or unventilated areas or areas exceeding the specified temperature range. Final assemblies must be tested for leaks. CNG Hose Assemblies should be tested on a monthly basis for conductivity per ANSI/IAS NGV 4.2; CSA 12.52.

Parker manufactures special Hose for aerospace in-flight applications. Aerospace in-flight applications employing Hose to transmit fuel, lubricating fluids and hydraulic fluids require a special Hose with a conductive inner tube. This Hose for in-flight applications is available only from Parker's Stratoflex Products Division. Do not use any other Parker Hose for in-flight applications, even if electrically conductive. Use of other Hoses for in-flight applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury and property damage. These Hose assemblies for in-flight applications must meet all applicable aerospace industry, aircraft engine and aircraft requirements.

2.2 Pressure: Hose, Tube and Fitting selection must be made so that the published maximum working pressure of the Hose, Tube and Fittings are equal to or greater than the maximum system pressure. The maximum working pressure of a Hose, or Tube Assembly is the lower of the respective published maximum working pressures of the Hose, Tube and the Fittings used. Surge pressures or peak transient pressures in the system must be below the published maximum working pressure for the Hose, Tube and Fitting. Surge pressures and peak pressures can usually only be determined by sensitive electrical instrumentation that measures and indicates pressures at millisecond intervals. Mechanical pressure gauges indicate only average pressures and cannot be used to determine surge pressures or peak transient pressures. Published burst pressure ratings for Hose is for manufacturing test purposes only and is no indication that the Product can be used in applications at the burst pressure or otherwise above the published maximum recommended working pressure.

2.3 Suction: Hoses used for suction applications must be selected to insure that the Hose will withstand the vacuum and pressure of the system. Improperly selected Hose may collapse in suction application.

2.4 Temperature: Be certain that fluid and ambient temperatures, both steady and transient, do not exceed the limitations of the Hose, Tube, Fitting and Seals. Temperatures below and above the recommended limit can degrade Hose, Tube, Fittings and Seals to a point where a failure may occur and release fluid. Tube and Fittings performances are normally degraded at elevated temperature. Material compatibility can also change at temperatures outside of the rated range. Properly insulate and protect the Hose Assembly when routing near hot objects (e.g. manifolds). Do not use any Hose in any application where failure of the Hose could result in the conveyed fluids (or vapors or mist from the conveyed fluids) contacting any open flame, molten metal, or other potential fire ignition source that could cause burning or explosion of the conveyed fluids or vapors.

2.5 Fluid Compatibility: Hose, and Tube Assembly selection must assure compatibility of the Hose tube, cover, reinforcement, Tube, Plating and Seals with the fluid media used. See the fluid compatibility chart in the Parker publication for the product being considered or used. This information is offered only as a guide. Actual service life can only be determined by the end user by testing under all extreme conditions and other analysis.

Hose, and Tube that is chemically compatible with a particular fluid must be assembled using Fittings and adapters containing likewise compatible seals. Flange or flare processes can change Tube material properties that may not be compatible with certain requirements such as NACE

2.6 Permeation: Permeation (that is, seepage through the Hose or Seal) will occur from inside the Hose or Fitting to outside when Hose or Fitting is used with gases, liquid and gas fuels, and refrigerants (including but not limited to such materials as helium, diesel fuel, gasoline, natural gas, or LPG). This permeation may result in high concentrations of vapors which are potentially flammable, explosive, or toxic, and in loss of fluid. Dangerous explosions, fires, and other hazards can result when using the wrong Hose for such applications. The system designer must take into account the fact that this

permeation will take place and must not use Hose or Fitting if this permeation could be hazardous. The system designer must take into account all legal, government, insurance, or any other special regulations which govern the use of fuels and refrigerants. Never use a Hose or Fitting even though the fluid compatibility is acceptable without considering the potential hazardous effects that can result from permeation through the Hose or Tube Assembly.

Permeation of moisture from outside the Hose or Fitting to inside the Hose or Fitting will also occur in Hose or Tube assemblies, regardless of internal pressure. If this moisture permeation would have detrimental effects (particularly, but not limited to refrigeration and air conditioning systems), incorporation of sufficient drying capacity in the system or other appropriate system safeguards should be selected and used. The sudden pressure release of highly pressurized gas could also result in Explosive Decompression failure of permeated Seals and Hoses.

2.7 Size: Transmission of power by means of pressurized fluid varies with pressure and rate of flow. The size of the components must be adequate to keep pressure losses to a minimum and avoid damage due to heat generation or excessive fluid velocity.

2.8 Routing: Attention must be given to optimum routing to minimize inherent problems (kinking or flow restriction due to Hose collapse, twisting of the Hose, proximity to hot objects or heat sources). For additional routing recommendations see SAE J1273 and ISO 17165-2. Hose Assemblies have a finite life and should be installed in a manner that allows for ease of inspection and future replacement. Hose because of its relative short life, should not be used in residential and commercial buildings inside of inaccessible walls or floors, unless specifically allowed in the product literature. Always review all product literature for proper installation and routing instructions.

2.9 Environment: Care must be taken to insure that the Hose, Tube and Fittings are either compatible with or protected from the environment (that is, surrounding conditions) to which they are exposed. Environmental conditions including but not limited to ultraviolet radiation, sunlight, heat, ozone, moisture, water, salt water, chemicals and air pollutants can cause degradation and premature failure.

2.10 Mechanical Loads: External forces can significantly reduce Hose, Tube and Fitting life or cause failure. Mechanical loads which must be considered include excessive flexing, twist, kinking, tensile or side loads, bend radius, and vibration. Use of swivel type Fittings or adapters may be required to insure no twist is put into the Hose. Use of proper Hose or Tube clamps may also be required to reduce external mechanical loads. Unusual applications may require special testing prior to Hose selection.

2.11 Physical Damage: Care must be taken to protect Hose from wear, snagging, kinking, bending smaller than minimum bend radius and cutting, any of which can cause premature Hose failure. Any Hose that has been kinked or bent to a radius smaller than the minimum bend radius, and any Hose that has been cut or is cracked or is otherwise damaged should be removed and discarded. Fittings with damages such as scratches on sealing surfaces and deformation should be replaced.

2.12 Proper End Fitting: See instructions 3.2 through 3.5. These recommendations may be substantiated by testing to industry standards such as SAE J517 for hydraulic applications, or MIL-A-5070, AS1339, or AS3517 for Hoses from Parker's Stratoflex Products Division for aerospace applications.

2.13 Length: When determining the proper Hose or Tube length of an assembly take into consideration. The Hose length change due to pressure. The Tube length change due to thermal expansion or contraction, and the Hose or Tube machine tolerances and movements. When routing short hose assemblies, it is recommended that the minimum free hose length is always used. Consult the hose manufacturer for their minimum free hose length recommendations. Hose assemblies should be installed in such a way that any motion or flexing occurs within the same plane.

2.14 Specifications and Standards: When selecting Hose, Tube and Fittings, government, industry, and Parker specifications and recommendations must be reviewed and followed as applicable.

2.15 Hose Cleanliness: Hose and Tube components may vary in cleanliness levels. Care must be taken to ensure that the Hose and Tube Assembly selected has an adequate level of cleanliness for the application.

2.16 Fire Resistant Fluids: Some fire resistant fluids that are to be conveyed by Hose or Tube require use of the same type of Hose or Tube as used with petroleum base fluids. Some such fluids require a special Hose, Tube, Fitting and Seal, while a few fluids will not work with any Hose at all. See instructions 2.5 and 1.5. The wrong Hose, Tube, Fitting or Seal may fail after a very short service. In addition, all liquids but pure water may burn fiercely

Parker Safety Guide

under certain conditions, and even pure water leakage may be hazardous.

2.17 Radiant Heat: Hose and Seals can be heated to destruction without contact by such nearby items as hot manifolds or molten metal. The same heat source may then initiate a fire. This can occur despite the presence of cool air around the Hose or Seal. Performance of Tube and Fitting subjected to the heat could be degraded.

2.18 Welding or Brazing: When using a torch or arc welder in close proximity to hydraulic lines, the hydraulic lines should be removed or shielded with appropriate fire resistant materials. Flame or weld spatter could burn through the Hose or Seal and possibly ignite escaping fluid resulting in a catastrophic failure. Heating of plated parts, including Hose Fittings and adapters, above 450°F (232°C) such as during welding, brazing or soldering may emit deadly gases. Any elastomer seal on fittings shall be removed prior to welding or brazing, any metallic surfaces shall be protected after brazing or welding when necessary. Welding and brazing filler material shall be compatible with the Tube and Fitting that are joined.

2.19 Atomic Radiation: Atomic radiation affects all materials used in Hose and Tube assemblies. Since the long-term effects may be unknown, do not expose Hose or Tube assemblies to atomic radiation. Nuclear applications may require special Tube and Fittings.

2.20 Aerospace Applications: The only Hose, Tube and Fittings that may be used for in-flight aerospace applications are those available from Parker's Stratoflex Products Division. Do not use any other Hose or Fittings for in-flight applications. Do not use any Hose or Fittings from Parker's Stratoflex Products Division with any other Hose or Fittings, unless expressly approved in writing by the engineering manager or chief engineer of Stratoflex Products Division and verified by the user's own testing and inspection to aerospace industry standards.

2.21 Unlocking Couplings: Ball locking couplings or other Fittings with quick disconnect ability can unintentionally disconnect if they are dragged over obstructions, or if the sleeve or other disconnect member, is bumped or moved enough to cause disconnect. Threaded Fittings should be considered where there is a potential for accidental uncoupling.

3.0 HOSE AND FITTINGS ASSEMBLY AND INSTALLATION INSTRUCTIONS

3.1 Component Inspection: Prior to assembly, a careful examination of the Hose and Fittings must be performed. All components must be checked for correct style, size, catalog number, and length. The Hose must be examined for cleanliness, obstructions, blisters, cover looseness, kinks, cracks, cuts or any other visible defects. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion or other imperfections. Do NOT use any component that displays any signs of nonconformance.

3.2 Hose and Fitting Assembly: Do not assemble a Parker Fitting on a Parker Hose that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Do not assemble a Parker Fitting on another manufacturer's Hose or a Parker Hose on another manufacturer's Fitting unless (i) the engineering manager or chief engineer of the appropriate Parker division approves the Assembly in writing or that combination is expressly approved in the appropriate Parker literature for the specific Parker product, and (ii) the user verifies the Assembly and the application through analysis and testing. For Parker Hose that does not specify a Parker Fitting, the user is solely responsible for the selection of the proper Fitting and Hose Assembly procedures. See instruction 1.4.

To prevent the possibility of problems such as leakage at the Fitting or system contamination, it is important to completely remove all debris from the cutting operation before installation of the Fittings. The Parker published instructions must be followed for assembling the Fittings on the Hose. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at www.parker.com.

3.3 Related Accessories: Do not crimp or swage any Parker Hose or Fitting with anything but the listed swage or crimp machine and dies in accordance with Parker published instructions. Do not crimp or swage another manufacturer's Fitting with a Parker crimp or swage die unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.

3.4 Parts: Do not use any Parker Fitting part (including but not limited to socket, shell, nipple, or insert) except with the correct Parker mating parts, in accordance with Parker published instructions, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.

3.5 Field Attachable/Permanent: Do not reuse any field attachable Hose Fitting that has blown or pulled off a Hose. Do not reuse a Parker permanent Hose Fitting (crimped or swaged) or any part thereof. Complete Hose Assemblies may only be reused after proper inspection under section 4.0. Do not assemble Fittings to any previously used hydraulic Hose that was in service, for use in a fluid power application.

3.6 Pre-Installation Inspection: Prior to installation, a careful examination of the Hose Assembly must be performed. Inspect the Hose Assembly for any damage or defects. DO NOT use any Hose Assembly that displays any signs of nonconformance.

3.7 Minimum Bend Radius: Installation of a Hose at less than the minimum listed bend radius may significantly reduce the Hose life. Particular attention must be given to preclude sharp bending at the Hose to Fitting juncture. Any bending during installation at less than the minimum bend radius must be avoided. If any Hose is kinked during installation, the Hose must be discarded.

3.8 Twist Angle and Orientation: Hose Assembly installation must be such that relative motion of machine components does not produce twisting.

3.9 Securement: In many applications, it may be necessary to restrain, protect, or guide the Hose to protect it from damage by unnecessary flexing, pressure surges, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.

3.10 Proper Connection of Ports: Proper physical installation of the Hose Assembly requires a correctly installed port connection insuring that no twist or torque is transferred to the Hose when the Fittings are being tightened or otherwise during use.

3.11 External Damage: Proper installation is not complete without insuring that tensile loads, side loads, kinking, flattening, potential abrasion, thread damage or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.

3.12 System Checkout: All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Hose maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.

3.13 Routing: The Hose Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame or sparks, a fire or explosion may occur. See section 2.4.

3.14 Ground Fault Equipment Protection Devices (GFEPDs): WARNING! Fire and Shock Hazard. To minimize the danger of fire if the heating cable of a Multitube bundle is damaged or improperly installed, use a Ground Fault Equipment Protection Device. Electrical fault currents may be insufficient to trip a conventional circuit breaker.

For ground fault protection, the IEEE 515: (www.ansi.org) standard for heating cables recommends the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres".

4.0 TUBE AND FITTINGS ASSEMBLY AND INSTALLATION INSTRUCTIONS

4.1 Component Inspection: Prior to assembly, a careful examination of the Tube and Fittings must be performed. All components must be checked for correct style, size, material, seal, and length. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion, missing seal or other imperfections. Do NOT use any component that displays any signs of nonconformance.

4.2 Tube and Fitting Assembly: Do not assemble a Parker Fitting with a Tube that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. The Tube must meet the requirements specified to the Fitting. The Parker published instructions must be followed for assembling the Fittings to a Tube. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at www.parker.com.

4.3 Related Accessories: Do not preset or flange Parker Fitting components using another manufacturer's equipment or procedures unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Tube, Fitting component and tooling must be checked for correct style, size and material. Operation and maintenance of Related Accessories must be in accordance with the operation manual for the designated Accessory.

4.4 Securement: In many applications, it may be necessary to restrain, protect, or guide the Tube to protect it from damage by unnecessary flexing,

Parker Safety Guide

pressure surges, vibration, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.

4.5 Proper Connection of Ports: Proper physical installation of the Tube Assembly requires a correctly installed port connection insuring that no torque is transferred to the Tube when the Fittings are being tightened or otherwise during use.

4.6 External Damage: Proper installation is not complete without insuring that tensile loads, side loads, flattening, potential abrasion, thread damage or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.

4.7 System Checkout: All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Tube Assembly maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.

4.8 Routing: The Tube Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame or sparks, a fire or explosion may occur. See section 2.4.

5.0 HOSE AND FITTING MAINTENANCE AND REPLACEMENT INSTRUCTIONS

5.1 Even with proper selection and installation, Hose life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a possible Hose failure, and experience with any Hose failures in the application or in similar applications should determine the frequency of the inspection and the replacement for the Products so that Products are replaced before any failure occurs. Certain products require maintenance and inspection per industry requirements. Failure to adhere to these requirements may lead to premature failure. A maintenance program must be established and followed by the user and, at minimum, must include instructions 5.2 through 5.7

5.2 Visual Inspection Hose/Fitting: Any of the following conditions require immediate shut down and replacement of the Hose Assembly:

- Fitting slippage on Hose;
- Damaged, cracked, cut or abraded cover (any reinforcement exposed);
- Hard, stiff, heat cracked, or charred Hose;
- Cracked, damaged, or badly corroded Fittings;
- Leaks at Fitting or in Hose;
- Kinked, crushed, flattened or twisted Hose; and
- Blistered, soft, degraded, or loose cover.

5.3 Visual Inspection All Other: The following items must be tightened, repaired, corrected or replaced as required:

- Leaking port conditions;
- Excess dirt buildup;
- Worn clamps, guards or shields; and
- System fluid level, fluid type, and any air entrapment.

5.4 Functional Test: Operate the system at maximum operating pressure and check for possible malfunctions and leaks. Personnel must avoid potential hazardous areas while testing and using the system. See section 2.2.

5.5 Replacement Intervals: Hose assemblies and elastomeric seals used on Hose Fittings and adapters will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Hose Assemblies and elastomeric seals should be inspected and replaced at specific replacement intervals, based on previous service life, government or industry recommendations, or when failures could result in unacceptable downtime, damage, or injury risk. See section 1.2. Hose and Fittings may be subjected to internal mechanical and/or chemical wear from the conveying fluid and may fail without warning. The user must determine the product life under such circumstances by testing. Also see section 2.5.

5.6 Hose Inspection and Failure: Hydraulic power is accomplished by utilizing high pressure fluids to transfer energy and do work. Hoses, Fittings and Hose Assemblies all contribute to this by transmitting fluids at high pressures. Fluids under pressure can be dangerous and potentially lethal and, therefore, extreme caution must be exercised when working with fluids under pressure and handling the Hoses transporting the fluids. From time to time, Hose Assemblies will fail if they are not replaced at proper time intervals.

Usually these failures are the result of some form of misapplication, abuse, wear or failure to perform proper maintenance. When Hoses fail, generally the high pressure fluids inside escape in a stream which may or may not be visible to the user. Under no circumstances should the user attempt to locate the leak by "feeling" with their hands or any other part of their body. High pressure fluids can and will penetrate the skin and cause severe tissue damage and possibly loss of limb. Even seemingly minor hydraulic fluid injection injuries must be treated immediately by a physician with knowledge of the tissue damaging properties of hydraulic fluid.

If a Hose failure occurs, immediately shut down the equipment and leave the area until pressure has been completely released from the Hose Assembly. Simply shutting down the hydraulic pump may or may not eliminate the pressure in the Hose Assembly. Many times check valves, etc., are employed in a system and can cause pressure to remain in a Hose Assembly even when pumps or equipment are not operating. Tiny holes in the Hose, commonly known as pinholes, can eject small, dangerously powerful but hard to see streams of hydraulic fluid. It may take several minutes or even hours for the pressure to be relieved so that the Hose Assembly may be examined safely.

Once the pressure has been reduced to zero, the Hose Assembly may be taken off the equipment and examined. It must always be replaced if a failure has occurred. Never attempt to patch or repair a Hose Assembly that has failed. Consult the nearest Parker distributor or the appropriate Parker division for Hose Assembly replacement information.

Never touch or examine a failed Hose Assembly unless it is obvious that the Hose no longer contains fluid under pressure. The high pressure fluid is extremely dangerous and can cause serious and potentially fatal injury.

5.7 Elastomeric seals: Elastomeric seals will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Elastomeric seals should be inspected and replaced.

5.8 Refrigerant gases: Special care should be taken when working with refrigeration systems. Sudden escape of refrigerant gases can cause blindness if the escaping gases contact the eye and can cause freezing or other severe injuries if it contacts any other portion of the body.

5.9 Compressed natural gas (CNG): Parker CNG Hose Assemblies should be tested after installation and before use, and at least on a monthly basis per instructions provided on the Hose Assembly tag. The recommended procedure is to pressurize the Hose and check for leaks and to visually inspect the Hose for damage and to perform an electrical resistance test.

Caution: Matches, candles, open flame or other sources of ignition shall not be used for Hose inspection. Leak check solutions should be rinsed off after use.

6.0 HOSE STORAGE

6.1 Age Control: Hose and Hose Assemblies must be stored in a manner that facilitates age control and first-in and first-out usage based on manufacturing date of the Hose and Hose Assemblies. Unless otherwise specified by the manufacturer or defined by local laws and regulations:

6.1.1 The shelf life of rubber hose in bulk form or hose made from two or more materials is 28 quarters (7 years) from the date of manufacture, with an extension of 12 quarters (3 years), if stored in accordance with ISO 2230;

6.1.2 The shelf life of thermoplastic and polytetrafluoroethylene hose is considered to be unlimited;

6.1.3 Hose assemblies that pass visual inspection and proof test shall not be stored for longer than 2 years.

6.1.4 Storage: Stored Hose and Hose Assemblies must not be subjected to damage that could reduce their expected service life and must be placed in a cool, dark and dry area with the ends capped. Stored Hose and Hose Assemblies must not be exposed to temperature extremes, ozone, oils, corrosive liquids or fumes, solvents, high humidity, rodents, insects, ultraviolet light, electromagnetic fields or radioactive materials.

Offer of Sale

The items described in this document and other documents or descriptions provided by Parker Hannifin Corporation, as subsidiaries and its authorized distributors are hereby offered for sale at prices to be established by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer (“Buyer”) shall be governed by all of the following Terms and Conditions. Buyer’s order for any such item, when communicated to Parker Hannifin Corporation, its subsidiary or an authorized distributor (“Seller”) verbally or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions of Sale: All descriptions, quotations, proposals, offers, acknowledgments, acceptances and sales of Seller’s products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer’s acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller’s acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer’s assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer’s offer. Acceptance of Seller’s products shall in all events constitute such assent.
2. Payment: Payment shall be made by Buyer net 30 days from the date of delivery of the items purchased hereunder. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer’s receipt of the shipment.
3. Delivery: Unless otherwise provided on the face hereof, delivery shall be made F.O.B. Seller’s plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller’s delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.
4. Warranty: Seller warrants that the items sold thereunder shall be free from defects in material or workmanship for a period of 365 days from the date of shipment to Buyer, or 2,000 hours of use, whichever expires first. THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GAURANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED, OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED.
5. Limitation Of Remedy: SELLER’S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER’S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.
6. Changes, Reschedules and Cancellations: Buyer may request to modify the designs or specifications for the items sold herunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller’s discretion, and shall be upon such terms and conditions as Seller may require.
7. Special Tooling: A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller’s property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.
8. Buyer’s Property: Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer’s property, may be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for

NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLELY OR PARTIALLY, TO BUYER’S DESIGNS OR SPECIFICATIONS.

Offer of Sale

the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Taxes: Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller or if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefore upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.

10. Indemnity For Infringement of Intellectual Property Rights: Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (hereinafter "Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes in the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and options, procure for Buyer the right to continue using said item, replace or modify said item so as to make it noninfringing, or offer to accept return of said item and

return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgments resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.

11. Force Majeure: Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.

12. Entire Agreement/Governing Law: The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of the sale of the items sold hereunder or this Agreement may be brought by either party more than two (2) years after the cause of action accrues.

514

Hose
A

Fittings
B

Adapters &
Valves
C

Quick Couplings
D

Accessories
E

General Technical
F

Part Number Index

| | | | | | | | |
|------------------|------------------|-------------------|---------------------------------------|---------------------------|---------------------------------------|---------------------|------|
| 01D9-4-6C..... | C-38 | 1018X-6-04C ... | A-26, A-28, A-36, A-68, B-15 | 10655-6-4C..... | B-7 | 10K0101-12-4C..... | C-27 |
| 01D9-6-6C..... | C-38 | 1018X-6-4..... | A-26, A-30 | 10655-6-6C..... | B-7 | 10K0101-16-12C..... | C-27 |
| 01D9-8-6C..... | C-38 | 1019X-8-08..... | A-20 | 10655-6-8C..... | B-7 | 10K0101-16-16C..... | C-27 |
| 01D9-8-8C..... | C-38 | 101BL-12-12..... | A-38, B-24 | 10655-6-6C..... | A-14 | 10K0101-16-4C..... | C-27 |
| 02D9-8-8C..... | C-38 | 101BL-6-06..... | A-38, B-24 | 10655-6-8C..... | A-14 | 10K0201-12-12C..... | C-28 |
| 02Y5-12-12C..... | C-32 | 101BL-8-08..... | A-38, B-24 | 10655-8-08C..... | B-7 | 10K0201-12-16C..... | C-28 |
| 02Y5-12-16C..... | C-32 | 101BL-8-08C..... | A-38, B-24 | 10655-8-8C..... | A-14 | 10K0201-12-6C..... | C-28 |
| 02Y5-12-4C..... | C-32 | 101BS-8-08..... | A-28, B-26 | 1068X-16-16C-SUBSEA..... | A-26, B-15 | 10K0201-16-6C..... | C-28 |
| 02Y5-12-6C..... | C-32 | 101BS-8-08C..... | A-28, B-26 | 1068X-4-04..... | A-26, A-28, B-15 | 10K0201-16-8C..... | C-28 |
| 02Y5-12-9C..... | C-32 | 101EX-2-012..... | A-12, B-33 | 1068X-4-04C ... | A-14, A-26, A-36, A-68, B-15 | 10K0201-4-12C..... | C-28 |
| 02Y5-16-12C..... | C-32 | 101EX-4-012..... | A-12, B-33 | 1068X-6-04..... | A-26, A-28, B-15 | 10K0201-6-12C..... | C-28 |
| 02Y5-16-16C..... | C-32 | 101HP-2-3..... | A-56, B-34 | 1068X-6-04C ... | A-14, A-26, A-36, A-68, B-15 | 10K0201-6-16C..... | C-28 |
| 02Y5-16-6C..... | C-32 | 101HP-2-4..... | A-56, B-34 | 1069X-10-08..... | A-20 | 10K0202-12-12C..... | C-29 |
| 02Y5-16-9C..... | C-32 | 101HP-4-3..... | A-56, B-34 | 106E3-16-16C..... | A-30, B-32 | 10K0202-12-16C..... | C-29 |
| 02Y5-1-9C..... | C-32 | 101HP-4-4..... | A-56, B-34 | 106E3-4-4C..... | A-30, B-32 | 10K0202-12-4C..... | C-29 |
| 02Y5-2-12C..... | C-32 | 101HP-4-6..... | A-56, B-34 | 106E3-6-4C..... | A-30, B-32 | 10K0202-12-6C..... | C-29 |
| 02Y5-2-16C..... | C-32 | 101HP-6-3..... | A-56, B-34 | 106E3-8-8C..... | A-30, B-32 | 10K0202-16-16C..... | C-29 |
| 02Y5-2-4C..... | C-32 | 101HP-6-4..... | A-56, B-34 | 106EX-4-012..... | A-12, B-33 | 10K0203-16-16C..... | C-38 |
| 02Y5-2-6C..... | C-32 | 101HP-6-4C..... | A-56, B-34 | 106EX-4-02..... | A-12, B-33 | 10K0203-4-6C..... | C-38 |
| 02Y5-2-9C..... | C-32 | 101HP-6-6..... | A-56, B-34 | 106HP-4-3..... | A-56, B-34 | 10K0203-4-8C..... | C-38 |
| 02Y5-4-12C..... | C-32 | 101HP-8-6..... | A-56, B-34 | 106HP-4-4..... | A-56, B-34 | 10K0203-6-4C..... | C-38 |
| 02Y5-4-16C..... | C-32 | 101KY-2-04..... | A-24, A-28 | 106HP-4-4C..... | A-56, B-34 | 10K0203-6-6C..... | C-38 |
| 02Y5-4-4C..... | C-32 | 101KY-4-04..... | A-24, A-28, B-36 | 106HP-6-4..... | A-56, B-34 | 10K0203-6-8C..... | C-38 |
| 02Y5-4-6C..... | C-32 | 101KY-4-05..... | A-24, B-3 | 106HP-6-6..... | A-56, B-34 | 10K0203-8-4C..... | C-38 |
| 02Y5-4-9C..... | C-32 | 101KY-6-04..... | A-28, B-36 | 106HP-6-6C..... | A-56, B-34 | 10K0203-8-8C..... | C-38 |
| 02Y5-6-12C..... | C-32 | 101KY-6-05..... | A-24 | 106HP-8-6C..... | A-56, B-34 | 10K0303-4-4C..... | C-43 |
| 02Y5-6-16C..... | C-32 | 101LX-4-04..... | A-32, B-39 | 106KY-6-04..... | A-28 | 10K0303-4-6C..... | C-43 |
| 02Y5-6-4C..... | C-32 | 101LX-4-04C..... | B-39 | 106LX-12-08C..... | A-14, A-36 | 10K0303-4-8C..... | C-43 |
| 02Y5-6-6C..... | C-32 | 101LX-6-04..... | A-32, B-39 | 106LX-6-04C..... | A-36, B-39 | 10K0306-4-4C..... | C-43 |
| 02Y5-6-9C..... | C-32 | 101LX-8-08..... | A-24, A-26, B-39 | 106LX-6-05C..... | A-68, B-39 | 10K0306-4-6C..... | C-43 |
| 02Y5-8-12C..... | C-32 | 101LX-8-08C..... | A-36, B-39 | 106LX-8-06C-M-SUBSEA..... | A-68, B-39 | 10K0306-4-8C..... | C-43 |
| 02Y5-8-16C..... | C-32 | 101NX-12-12..... | B-48 | 106LX-8-06C-M-SUBSEA..... | A-68, B-39 | 10K0306-6-6C..... | C-43 |
| 02Y5-8-4C..... | C-32 | 101NX-20-20..... | A-26 | 106LX-8-08..... | A-24, A-26, B-39 | 10K0306-8-6C..... | C-43 |
| 02Y5-8-6C..... | C-32 | 101NX-4-04..... | B-48 | 106LX-8-08C..... | A-14, A-36, B-39 | 10K0606-4-4C..... | C-43 |
| 02Y5-8-9C..... | C-32 | 101NX-6-06..... | B-48 | 106LX-8-08C-M-SUBSEA..... | A-68, B-39 | 10K0606-4-6C..... | C-43 |
| 02Y6-12-6C..... | C-37 | 101NX-8-08..... | A-22, B-48 | 106NX-12-12..... | B-49 | 10K0606-6-6C..... | C-43 |
| 02Y6-12-9C..... | C-37 | 101TX-1-025..... | A-16 | 106NX-16-12..... | B-49 | 10K0606-6-6C..... | C-43 |
| 02Y6-16-9C..... | C-37 | 101TX-1-025W..... | B-54 | 106NX-16-16..... | B-49 | 10K06-10C-CAP..... | C-45 |
| 02Y6-1-6C..... | C-37 | 101TX-1-03..... | A-16, B-54 | 106NX-20-20..... | A-26, B-49 | 10K06-12C-CAP..... | C-45 |
| 02Y6-2-4C..... | C-37 | 101TX-2-025..... | A-16, B-54 | 106NX-4-04..... | B-49 | 10K06-4C-CAP..... | C-45 |
| 02Y6-2-6C..... | C-37 | 101TX-2-02W..... | A-16, B-54 | 106NX-6-04..... | B-49 | 10K06-6C-CAP..... | C-45 |
| 02Y6-2-9C..... | C-37 | 101TX-2-03..... | A-16, B-54 | 106NX-6-06..... | B-49 | 10K06-8C-CAP..... | C-45 |
| 02Y6-4-4C..... | C-37 | 101TX-4-025W..... | A-16, B-54 | 106NX-8-06..... | B-49 | 10KL02-12C..... | C-39 |
| 02Y6-4-6C..... | C-37 | 101TX-4-03..... | A-16, B-54 | 106NX-8-08..... | A-20, A-22, B-49 | 10KL02-16C..... | C-39 |
| 02Y6-4-9C..... | C-37 | 101TX-4-03W..... | A-16 | 106TX-4-025W..... | A-16, B-55 | 10KP01-12C..... | C-41 |
| 02Y6-6-4C..... | C-37 | 101TX-4-05W..... | A-16 | 106TX-4-02W..... | A-16, B-55 | 10KP01-16C..... | C-41 |
| 02Y6-6-6C..... | C-37 | 101UX-6-04C..... | A-68 | 106TX-6-03W..... | A-16, B-55 | 10KP03-10C..... | C-45 |
| 02Y6-6-9C..... | C-37 | 1028X-4-04C..... | A-68 | 106UX-6-06C..... | A-68 | 10KP03-16C..... | C-45 |
| 02Y6-8-4C..... | C-37 | 102TX-1-025..... | A-16, B-54 | 10K0101-12-12C..... | C-27 | 10KP03-4C..... | C-45 |
| 02Y6-8-6C..... | C-37 | 102TX-2-03..... | A-16, B-54 | | | 10KP03-6C..... | C-45 |
| 02Y6-8-9C..... | C-37 | 1063X-6-06C..... | A-14, B-11 | | | 10KP03-8C..... | C-45 |
| 1018X-4-04..... | A-26, A-28, B-15 | 1063X-8-06C..... | A-14, B-11 | | | 10KT02-12C..... | C-40 |
| 1018X-4-04C ... | A-36, A-68, B-15 | 10655-4-4C..... | A-14, B-7 | | | 10KT02-16C..... | C-40 |
| 1018X-6-04..... | B-15 | | | | | | |

Part Number Index

| | | | | | | | |
|------------------------|------------|----------------------------|---|--------------------------------------|------------------------|----------------------------|--|
| 10KX02-12C..... | C-40 | 15KT02-6C..... | C-40 | 1AYCX-16-16W..... | A-42, B-28 | 1HN5X-48-48..... | A-62, B-61 |
| 10KX02-16C..... | C-40 | 15KT02-8C..... | C-40 | 1AYKY-6-04..... | A-24, A-28, B-36 | 1HNLX-32-16C4462... | A-36, B-44 |
| 137E3-16-16C-411... | A-30, B-32 | 15KX02-4C..... | C-40 | 1AYKY-8-05..... | A-24, B-36 | 1HNLX-48-48..... | A-62, B-61 |
| 137E3-4-4C..... | A-30, B-32 | 15KX02-6C..... | C-40 | 1AYLX-11-08...A-18, A-24, A-26, B-41 | | 1HNS6-32-32..... | A-64, B-62 |
| 137E3-6-4C..... | A-30, B-32 | 15KX02-8C..... | C-40 | 1AYLX-11-08C..... | A-36, B-41 | 1HNS6-32-32-SC..... | A-64, B-62 |
| 137E3-8-8C-411..... | A-30, B-32 | 15Y8X-6-04C..... | A-28, B-16 | 1AYLX-6-02..... | A-32, B-41 | 1HNTX-48-48..... | A-62, B-62 |
| 1378X-16-16C-SUBSEA... | A-26, B-15 | 16ALX-16-16C4462..... | A-36 | 1AYLX-6-04..... | A-32, B-41 | 1HYLX-4-02..... | A-32, B-45 |
| 139E3-16-16C-411... | A-30, B-31 | 16Y2X-4-025..... | A-40, A-44, B-9 | 1AYLX-6-04C..... | B-41 | 1HYLX-4-02-LH..... | A-32, B-45 |
| 139E3-4-4C..... | A-30, B-31 | 16Y2X-4-03..... | A-40, A-44, B-9 | 1AYLX-8-05C..... | A-68, B-41 | 1MB8X-6-4..... | A-26, A-28, B-18 |
| 139E3-6-4C..... | A-30, B-31 | 1922X-4-03..... | A-40, A-44 | 1AYTX-6-025W..... | A-16, B-55 | 1TM2X-8-03-HPK..... | B-64 |
| 139E3-8-8C-411..... | A-30, B-31 | 1922X-4-03-SA..... | B-10 | 1AYTX-6-02W..... | A-16, B-55 | 1TM2X-8-05-HPK..... | B-64 |
| 1398X-16-16C-SUBSEA... | A-26, B-15 | 1923X-8-06C..... | A-14, B-11 | 1AYTX-6-03W..... | A-16, B-55 | 1TMBL-9-08-HPK..... | B-64 |
| 15K0101-1-1C..... | C-27 | 19255-4-4C..... | A-14, B-7 | 1AYUX-6-04C..... | A-68, B-56 | 1TMBS-9-08-HPK..... | B-64 |
| 15K0101-12-6C..... | C-27 | 19255-6-6C..... | A-14, B-7 | 1AYUX-8-06C..... | A-68, B-56 | 1TMKY-8-05-HPK..... | B-64 |
| 15K0101-16-6C..... | C-27 | 19255-8-8C..... | A-14, B-7 | 1C38X-4-4..... | A-26, B-17 | 1Y25X-12-08C-M-SUBSEA.. | A-68, B-13 |
| 15K0101-2-1C..... | C-27 | 1928X-4-04..... | A-26, A-28, B-16 | 1C38X-8-04..... | A-26, A-28, B-17 | 1Y25X-9-08C-M-SUBSEA... | A-68, B-13 |
| 15K0101-2-2C..... | C-27 | 192LX-8-08C..... | A-14, B-40 | 1C93X-14-06C..... | A-14, B-11 | 1Y28X-6-04C..... | A-36, B-18 |
| 15K0101-2-4C..... | C-27 | 19G8X-16-16C-SUBSEA... | A-26, B-15 | 1C93X-16-06C..... | A-14, B-11 | 1Y28X-9-04C..... | A-36, B-18 |
| 15K0101-4-4C..... | C-27 | 19G8X-24-16C-SUBSEA... | A-26, B-15 | 1C955-10-4C..... | A-14, B-8 | 1Y2LX-12-08C..... | A-36, B-46 |
| 15K0101-6-6C..... | C-27 | 19GE3-16-16C..... | A-30, B-31 | 1C955-12-4C..... | A-14, B-8 | 1Y2LX-12-08C-M-SUBSEA..... | |
| 15K0101-6-8C..... | C-27 | 19GE3-16-8C..... | A-30, B-31 | 1C955-12-6C..... | A-14, B-8 | | A-68, B-46 |
| 15K0101-8-8C..... | C-27 | 19GE3-24-16C..... | A-30, B-31 | 1C955-16-8C..... | A-14, B-8 | 1Y2LX-16-16C4462.... | A-36, B-46 |
| 15K0201-1-4C..... | C-28 | 19GE3-8-8C..... | A-30, B-31 | 1C98X-10-04C..... | A-14, B-17 | 1Y2LX-6-04..... | A-32, B-46 |
| 15K0201-1-8C..... | C-28 | 19ME3-16-16C..... | A-30, B-30 | 1C98X-8-04C..... | A-14, B-17 | 1Y2LX-9-08C..... | A-36, B-46 |
| 15K0201-2-1C..... | C-28 | 19ME3-16-8C..... | A-30, B-30 | 1C9BL-14-06..... | A-38, B-25 | 1Y2UX-6-04C..... | A-68, B-56 |
| 15K0201-2-8C..... | C-28 | 19ME3-24-16C..... | A-30, B-30 | 1C9BL-14-08..... | A-38, B-25 | 1Y2UX-9-06C..... | A-68, B-56 |
| 15K0201-4-1C..... | C-28 | 19M8X-16-16C-SUBSEA... | A-26, B-16 | 1C9BL-16-06..... | A-38, B-25 | 1Y42X-4-025.... | A-40, A-44, B-10 |
| 15K0201-4-8C..... | C-28 | 19M8X-24-16C-SUBSEA... | A-26, B-16 | 1C9BL-16-08..... | A-38, B-25 | 1Y42X-6-025.... | A-40, A-44, B-10 |
| 15K0201-6-2C..... | C-28 | 19ME3-8-8C..... | A-30, B-30 | 1C9BL-25-08..... | A-38 | 1Y42X-4-03..... | A-40, A-44, A-48, B-10 |
| 15K0201-6-6C..... | C-28 | 19WE3-16-16C..... | A-30, B-30 | 1C9BL-25-12..... | A-38, B-25 | | A-40, A-44, A-48, B-10 |
| 15K0201-6-8C..... | C-28 | 19WE3-16-8C..... | A-30, B-30 | 1C9BS-16-08..... | A-28, B-27 | 1Y42X-6-03..... | A-40, A-44, A-48, B-10 |
| 15K0201-8-8C..... | C-28 | 19WE3-24-16C..... | A-30, B-30 | 1C9CX-30-16W..... | A-42, B-28 | | A-40, A-44, A-46, A-48, A-50, A-52, B-10, B-10 |
| 15K0202-2-2C..... | C-29 | 19WE3-8-8C..... | A-30, B-30 | 1C9EX-6-012..... | A-12, B-33 | 1Y42X-6-05..... | A-40, A-44, A-46, A-48, A-50, A-52, B-10, B-10 |
| 15K0202-4-1C..... | C-29 | 19W8X-16-16C-SUBSEA.. | A-26, B-16 | 1C9EX-8-012..... | A-12, B-33 | 1Y42X-9-03..... | A-40, A-44, A-48, B-10 |
| 15K0202-4-4C..... | C-29 | 19W8X-24-16C-SUBSEA.. | A-26, B-16 | 1C9EX-8-02..... | A-12, B-33 | | A-40, A-44, A-46, A-48, A-50, A-52, B-10 |
| 15K0202-6-2C..... | C-29 | 1AY2X-10-05-SA..... | A-40, A-44, A-46, A-48, A-50, A-52, B-9 | 1C9LX-16-08..... | A-18 | 1Y42X-9-05..... | A-40, A-44, A-46, A-48, A-50, A-52, B-10 |
| 15K0202-6-6C..... | C-29 | 1AY2X-13-05..... | A-40 | 1C9LX-16-08C..... | A-14, A-36, B-43 | | A-24, B-37 |
| 15K0202-8-1C..... | C-29 | 1AY2X-6-025..... | A-40, A-44 | 1D98X-4-4..... | A-26, A-28, A-30, B-18 | 1Y4KY-9-05..... | A-24, B-37 |
| 15K0202-8-2C..... | C-29 | 1AY2X-6-025-SA..... | B-9 | | | 1Y4LX-4-02..... | A-32, B-46 |
| 15K0202-8-6C..... | C-29 | 1AY2X-6-03..... | A-40, A-44, B-9 | 1HE5X-32-24COSK..... | A-58, A-66 | 1Y4LX-9-08C..... | A-36, B-46 |
| 15K0202-8-8C..... | C-29 | 1AY2X-6-03-SA..... | A-48, B-9 | 1HE5X-32-24COSK-FLAT..... | A-58, B-59 | 1YHLX-4-02..... | A-32, B-47 |
| 15K02-12C-CAP..... | C-41 | 1AY2X-8-05-SA..... | A-40, A-44, A-46, A-48, A-50, A-52, B-9 | 1HE5X-32-24COSK-SEG..... | A-58 | 1YHLX-4-02-LH..... | A-32, B-47 |
| 15K02-2C-CAP..... | C-41 | 1AY5X-11-08C-M-SUBSEA..... | | 1HE5X-48-48..... | A-62, B-59 | 1YHLX-9-06SC..... | A-34, B-47 |
| 15K02-4C-CAP..... | C-41 | | A-68, B-12 | 1HE5X-48-48-FLAT.... | A-62, B-59 | 1YHTX-4-025..... | A-16, B-55 |
| 15K02-6C-CAP..... | C-41 | 1AY8X-6-04..... | A-26, A-28, B-17 | 1HECX-32-32-FLAT.... | A-60, B-59 | 1YHTX-6-03..... | A-16, B-55 |
| 15K02-8C-CAP..... | C-41 | 1AY8X-6-04C..... | A-14, A-26, A-36, A-68, B-17 | 1HELX-48-48..... | A-62, B-60 | 1YHTX-6-03W..... | A-16 |
| 15KL02-12C-45..... | C-39 | 1AYBL-11-06..... | A-38, B-24 | 1HELX-48-48-FLAT.... | A-62, B-60 | 1YHTX-6-03W-LH..... | A-16 |
| 15KL02-4C..... | C-39 | 1AYBL-11-08..... | A-38, B-24 | 1HES6-32-32-FLAT.... | A-64, B-60 | 1YHTX-6-05W..... | A-16 |
| 15KL02-4C-45..... | C-39 | 1AYBL-11-08C..... | A-38, B-24 | 1HES6-32-32-FLAT-SC. | A-64, B-60 | 1YHTX-6-05W-LH..... | A-16 |
| 15KL02-6C..... | C-39 | 1AYBL-11-08C..... | A-38, B-24 | 1HETX-48-48..... | A-62, B-60 | 201RX-2-2C..... | A-12, B-52 |
| 15KL02-6C-45..... | C-39 | 1AYBL-8-06..... | A-38 | 1HETX-48-48-FLAT.... | A-62, B-60 | 2020N-012R30..... | A-11, A-12 |
| 15KL02-8C..... | C-39 | 1AYBS-11-08..... | A-28, B-26 | 1HN5X-32-24COSK..... | A-58, A-66 | 2020N-02V30..... | A-11, A-12 |
| 15KL02-8C-45..... | C-39 | 1AYBS-11-08C..... | A-28, B-26 | | | | |
| 15KP01-1C..... | C-41 | | | | | | |
| 15KP01-2C..... | C-41 | | | | | | |
| 15KT02-4C..... | C-40 | | | | | | |

For detailed ordering information, please consult price list or contact Parflex Division.

Part Number Index

| | | | |
|--|------------------------------------|--|--|
| 2022N-04V91-10K .. A-13, A-14, F-28 | 2380N-04V06 A-25 | 2440M-06V38 A-67, A-68, F-27 | 2640N-12V32 A-42 |
| 2022N-04V91-10K-13MM F-28 | 2380N-04V06W A-23 | 2440M-08V38 A-67, A-68, F-27 | 2640N-12V32 A-41 |
| 2022N-04V91-5K A-13, A-14, F-28 | 2380N-04V0x A-26 | 2440M-12V38 F-27 | 2640N-12V71 A-42 |
| 2022N-06V91-10K A-13, A-14, F-28 | 2380N-04V0xW A-24 | 2440M-16V38-5K F-27 | 2640N-12V91 A-41, A-42, F-25 |
| 2022N-06V91-5K A-13, A-14, F-28 | 2380N-04V36 A-25, A-26 | 2440N-04V91 A-35, A-36, F-25 | 2640N-24V80 A-57, A-58, F-26 |
| 2022N-08V91-10K A-13, A-14, F-28 | 2380N-04V91 A-25, A-26, F-25 | 2440N-04V32 A-33, A-35 | 2640N-24V80-15K A-57, A-58 |
| 2022N-08V91-5K A-13, A-14, F-28 | 2380N-05V00W A-23 | 2440N-04V32 A-33 | 2640N-24V80-KOP F-26 |
| 206RX-4-2C A-12, B-52 | 2380N-05V06W A-23 | 2440N-06V91 A-35, A-36, F-25 | 2640N-24V80-KOP2 F-26 |
| 216-200-18 A-18, A-28, A-30, A-34, A-36, A-48, E-2 | 2380N-05V0xW A-24 | 2440N-08V32 A-33 | 2640N-48V80 A-61, A-62, F-26, F-41 |
| 220-200-22 A-30, A-34, A-36, A-42, E-2 | 2380N-06V91 F-25 | 2440N-08V3x A-34 | 2648N-32V80 A-59, A-60 |
| 2240D-025V33-TC A-15, A-16 | 2380N-08V00 A-25, A-26 | 2440N-08V91 A-35, A-36, F-25 | 2740D-025V30 A-43 |
| 2240D-025V34 A-15, A-16 | 2380N-08V10W A-23 | 2440N-12V36 A-33 | 2740D-025V35 A-43 |
| 2240D-02V32 A-15, A-16 | 2380N-08V16W A-23 | 2440N-12V37 A-33 | 2740D-025V3x A-44 |
| 2240D-02V33-TC A-15, A-16 | 2380N-08V1xW A-24 | 2440N-12V3x A-34 | 2740D-03V30 A-43 |
| 2240D-03V32 A-15, A-16 | 2380N-08V91 F-25 | 2440N-12V91 A-35, A-36, F-25 | 2740D-03V35 A-43 |
| 2240D-03V34 A-15, A-16 | 2380N-16V12 A-25 | 2440N-16...10K A-36 | 2740D-03V3x A-44 |
| 2240D-03V36-TC A-15, A-16 | 2380N-16V16 A-25 | 2440N-16V30 A-33 | 2740D-05V32 A-43 |
| 2240D-03V3x A-16 | 2380N-16V1x A-26 | 2440N-16V36 A-33 | 2740D-05V37 A-43 |
| 2240D-04V32 A-15, A-16 | 2380N-20V30 A-25, A-26 | 2440N-16V3x A-34 | 2740D-05V3x A-44 |
| 2240D-04V33 A-15 | 2388N-04V04 A-27, A-28 | 2440N-16V91 A-35, A-36, F-25 | 2741D-05V34/10 A-45, A-46 |
| 2240D-04V3x A-16 | 2388N-04V12W A-27 | 2440N-16V91-10K A-35, F-25 | 2749D-05V35 A-43 |
| 2240D-05V32 A-15, A-16 | 2388N-04V13W A-27 | 2440N-48V80 A-61, A-62, F-26, F-41 | 2840D-03V34 A-47, A-48 |
| 2240D-05V36-TC A-15, A-16 | 2388N-04V1xW A-28 | 2448D-025V32-TC A-31 | 2840D-05V32 A-47 |
| 2240M-04V38 F-27 | 2388N-08V13W A-27 | 2448D-025V35-TC A-31 | 2840D-05V35 A-47 |
| 2240N-04V91 F-25 | 2388N-08V14W A-27 | 2448D-025V3x-TC A-32 | 2840D-05V3x A-48 |
| 2240N-32V10 A-63, A-64 | 2388N-08V1xW A-28 | 2448M-04V38 A-67, A-68, F-27 | 2840D-08V30 A-47 |
| 2240N-48V80 A-61, A-62, F-26, F-41 | 2390M-12V38 F-27 | 2448M-05V38 A-67, A-68, F-27 | 2840D-08V37 A-47 |
| 2244N-025V00 A-17, A-18 | 2390M-16V38 F-27 | 2448M-06V38 A-67, A-68, F-27 | 2840D-08V3x A-48 |
| 2244N-08V16W A-17, A-18 | 2390N-04V00 A-29 | 2448M-32V88 A-65, A-66, F-27 | 2841D-05V34/15 A-49, A-50 |
| 2244N-08V71 A-17, A-18 | 2390N-04V12 A-29 | 2448N-04V91 A-35, A-36, F-25 | 2849D-05V34 A-51, A-52 |
| 2248D-025V32-TC A-15, A-16 | 2390N-04V16 A-29 | 2448N-32V10 A-64 | 2TURX-4-2C A-12, B-53 |
| 2248D-03V32-TC A-15, A-16 | 2390N-04Vxx A-30 | 2448N-32V80 A-59, A-60, F-26, F-41 | 412-400 A-36, A-44, A-48 |
| 2248N-32V10 A-63 | 2390N-06V91 A-29, A-30, F-25 | 2580M-32V80 F-27 | 416-400-16 A-42, A-44, A-48 |
| 2340M-04V38 F-27 | 2390N-08V12 A-29 | 2580M-32V88 A-65, A-66 | 508-J-500-10 ... A-26, A-30, A-36, A-40, A-44, E-2 |
| 2340N-04V91 F-25 | 2390N-08V13 A-29 | 2580M-06V12 A-37, A-38 | 510-A-500-12 ... A-24, A-26, A-28, A-40, A-44, E-2 |
| 2370M-06V38 F-27 | 2390N-08V16 A-29 | 2580N-08V10-MSHA ... A-37, A-38 | 512-400-14 E-2 |
| 2370N-06V91 F-25 | 2390N-08V1x A-30 | 2580N-08V12 A-37, A-38 | 520-A-500-26 A-34, A-36, E-2 |
| 2370N-06V91-10K F-25 | 2390N-08V91 F-25 | 2580N-08V13 A-37 | 57CR-16-BLU A-53, A-54, F-28 |
| 2370N-08V30 A-19, A-20 | 2390N-12V03 A-29, A-30 | 2580N-12V1x A-38 | 57CR-16-YEL A-53, A-54 |
| 2380F-08V07 A-21, A-22 | 2390N-12V91 F-25 | 2580N-32V80 A-59, A-60, F-26, F-41 | 57CR-8-BLU A-53, A-54, F-28 |
| 2380M-04V38 F-27 | 2390N-16V12 A-29 | 2640D-025V32 A-39 | 57CR-8-YEL A-53, A-54 |
| 2380M-05V38 F-27 | 2390N-16V13 A-29 | 2640D-025V35 A-39 | 5Y01-12-12C C-31 |
| 2380N-04V00 A-25 | 2390N-16V16 A-29 | 2640D-025V3x A-40 | 5Y01-12-16C C-31 |
| 2380N-04V02 A-25 | 2390N-16V1x A-30 | 2640D-02V32-TC A-31 | 5Y01-12-2C C-31 |
| 2380N-04V03W A-23 | 2390N-16V91 F-25 | 2640D-02V37-TC A-31 | 5Y01-12-4C C-31 |
| 2380N-04V04 A-25 | 2440D-025V37 A-31, A-32 | 2640D-02V3x-TC A-32 | 5Y01-12-6C C-31 |
| | 2440D-02V32-TC A-31 | 2640D-03V32 A-39 | 5Y01-12-8C C-31 |
| | 2440D-02V37-TC A-31 | 2640D-03V37 A-39 | 5Y01-16-12C C-31 |
| | 2440D-02V3x-TC A-32 | 2640D-03V3x A-40 | 5Y01-16-16C C-31 |
| | 2440D-03V32-TC A-31, A-32 | 2640D-03V37-TC A-39, A-40 | 5Y01-16-2C C-31 |
| | 2440D-04V32-TC A-31, A-32 | 2640M-08V38 A-67, A-68, F-27 | 5Y01-16-4C C-31 |
| | 2440D-05V32-TC A-31, A-32 | 2640M-24V88 A-65, A-66, F-27 | |
| | 2440M-04V38 A-67, A-68, F-27 | 2640N-08V32 A-41, A-42 | |
| | 2440M-05V38 A-67, A-68, F-27 | | |

Part Number Index

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|---------------------|----------------------|----------------------|---------------------|----------------------|---------------------|---------------------|----------------------|---------------------|----------------------|---------------------|---------------------|---------------------|--------------------|----------------------|----------------------|----------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|-----------------------|---------------------|-----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|----------------------|---------------------|----------------------|--------------------|----------------------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|-----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|---------------------|----------------------|----------------------|---------------------|----------------------|---------------------|---------------------|----------------------|---------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-----------------------|----------------------|-----------------------|---------------------|-----------------------|--------------------|-----------------------|-----------------------|-----------------------|
| 5Y01-16-6C..... C-31 | 5Y5Y-16-16C..... C-15 | 5Y01-16-8C..... C-31 | 5Y5Y-4-12C..... C-15 | 5Y01-4-12C..... C-31 | 5Y5Y-4-16C..... C-15 | 5Y01-4-16C..... C-31 | 5Y5Y-4-4C..... C-15 | 5Y01-4-2C..... C-31 | 5Y5Y-4-6C..... C-15 | 5Y01-4-4C..... C-31 | 5Y5Y-4-9C..... C-15 | 5Y01-4-6C..... C-31 | 5Y5Y-6-12C..... C-15 | 5Y01-4-8C..... C-31 | 5Y5Y-6-16C..... C-15 | 5Y01-6-12C..... C-31 | 5Y5Y-6-6C..... C-15 | 5Y01-6-16C..... C-31 | 5Y5Y-6-9C..... C-15 | 5Y01-6-2C..... C-31 | 5Y5Y-9-12C..... C-15 | 5Y01-6-4C..... C-31 | 5Y5Y-9-16C..... C-15 | 5Y01-6-6C..... C-31 | 5Y5Y-9-9C..... C-15 | 5Y01-6-8C..... C-31 | 5Y6C-CAP..... C-19 | 5Y01-9-12C..... C-31 | 5Y6Y-12-4C..... C-16 | 5Y01-9-16C..... C-31 | 5Y6Y-12-6C..... C-16 | 5Y01-9-2C..... C-31 | 5Y6Y-12-9C..... C-16 | 5Y01-9-4C..... C-31 | 5Y6Y-16-4C..... C-16 | 5Y01-9-6C..... C-31 | 5Y6Y-16-6C..... C-16 | 5Y01-9-8C..... C-31 | 5Y6Y-16-9C..... C-16 | 5Y02-12-12C..... C-34 | 5Y6Y-4-4C..... C-16 | 5Y02-12-16C..... C-34 | 5Y6Y-4-6C..... C-16 | 5Y02-12-2C..... C-34 | 5Y6Y-4-9C..... C-16 | 5Y02-12-4C..... C-34 | 5Y6Y-6-4C..... C-16 | 5Y02-12-6C..... C-34 | 5Y6Y-6-6C..... C-16 | 5Y02-12-8C..... C-34 | 5Y6Y-6-9C..... C-16 | 5Y02-16-12C..... C-34 | 5Y6Y-9-4C..... C-16 | 5Y02-16-16C..... C-34 | 5Y6Y-9-6C..... C-16 | 5Y02-16-2C..... C-34 | 5Y6Y-9-9C..... C-16 | 5Y02-16-4C..... C-34 | 5Y9C-CAP..... C-19 | 5Y02-16-6C..... C-34 | 5Y5Y-12-16C..... C-11 | 5Y02-16-8C..... C-34 | 5Y5Y-12-4C..... C-11 | 5Y02-4-12C..... C-34 | 5Y5Y-12-6C..... C-11 | 5Y02-4-16C..... C-34 | 5Y5Y-12-9C..... C-11 | 5Y02-4-2C..... C-34 | 5Y5Y-16-12C..... C-11 | 5Y02-4-4C..... C-34 | 5Y5Y-16-4C..... C-11 | 5Y02-4-6C..... C-34 | 5Y5Y-16-6C..... C-11 | 5Y02-4-8C..... C-34 | 5Y5Y-16-9C..... C-11 | 5Y02-6-12C..... C-34 | 5Y5Y-4-12C..... C-11 | 5Y02-6-16C..... C-34 | 5Y5Y-4-16C..... C-11 | 5Y02-6-2C..... C-34 | 5Y5Y-4-6C..... C-11 | 5Y02-6-4C..... C-34 | 5Y5Y-4-9C..... C-11 | 5Y02-6-6C..... C-34 | 5Y5Y-6-12C..... C-11 | 5Y02-6-8C..... C-34 | 5Y5Y-6-16C..... C-11 | 5Y02-9-12C..... C-34 | 5Y5Y-6-4C..... C-11 | 5Y02-9-16C..... C-34 | 5Y5Y-6-9C..... C-11 | 5Y02-9-2C..... C-34 | 5Y5Y-9-12C..... C-11 | 5Y02-9-4C..... C-34 | 5Y5Y-9-16C..... C-11 | 5Y02-9-6C..... C-34 | 5Y5Y-9-4C..... C-11 | 5Y02-9-8C..... C-34 | 5Y5Y-9-6C..... C-11 | 5Y12C-CAP..... C-19 | 5Y5Y-12-12C..... C-15 | 5Y02-9-12C..... C-34 | 5Y5Y-12-16C..... C-15 | 5Y16C-CAP..... C-19 | 5Y5Y-12-16C..... C-15 | 5Y4C-CAP..... C-19 | 5Y5Y-12-16C..... C-15 | 5Y5Y-12-12C..... C-15 | 5Y5Y-12-16C..... C-15 |
|----------------------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|---------------------|----------------------|----------------------|---------------------|----------------------|---------------------|---------------------|----------------------|---------------------|----------------------|---------------------|---------------------|---------------------|--------------------|----------------------|----------------------|----------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|-----------------------|---------------------|-----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|----------------------|---------------------|----------------------|--------------------|----------------------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|-----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|----------------------|----------------------|----------------------|----------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------------|---------------------|----------------------|----------------------|---------------------|----------------------|---------------------|---------------------|----------------------|---------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-----------------------|----------------------|-----------------------|---------------------|-----------------------|--------------------|-----------------------|-----------------------|-----------------------|

For detailed ordering information, please consult price list or contact Parflex Division.

Part Number Index

| | | | | | | | |
|------------------------------|---------------------------------|----------------------------------|------------------|----------------------|------------|-------------------|------------|
| 6AYLX-6-3..... | A-32, B-42 | 6Y01-4-6C..... | C-36 | 6Y6Y-4-9C..... | C-22 | AV6Y-6C-30..... | C-49 |
| 6AYLX-6-3C..... | A-32, B-42 | 6Y01-4-8C..... | C-36 | 6Y6Y-6-6C..... | C-22 | AV6Y-6C-6..... | C-49 |
| 6AYLX-6-4C..... | A-36, B-42 | 6Y01-6-12C..... | C-36 | 6Y6Y-6-9C..... | C-22 | AV6Y-9C-30..... | C-49 |
| 6AYLX-6-4C-SD..... | A-36, B-42 | 6Y01-6-16C..... | C-36 | 6Y6Y-9-9C..... | C-22 | AV6Y-9C-60..... | C-49 |
| 6AYLX-8-5C..... | A-32, B-42 | 6Y01-6-1C..... | C-36 | 6Y9C-CAP..... | C-25 | AY11C-CAP..... | C-9 |
| 6AYLX-8-5C-M-SUBSEA..... | A-68, B-42 | 6Y01-6-2C..... | C-36 | 6YHLX-4-2AC-PL..... | A-32, B-47 | AY16C-CAP..... | C-9 |
| 6AYLX-8-6C..... | A-36, B-42 | 6Y01-6-4C..... | C-36 | 6YHLX-4-2AC-PL-LH .. | A-32, B-47 | AY6C-CAP..... | C-9 |
| 6AYLX-8-6C-M-SUBSEA..... | B-42 | 6Y01-6-6C..... | C-36 | 6YHLX-4-3C-PL..... | A-32, B-47 | AY8C-CAP..... | C-9 |
| 6AYLX-8-6C-SUBSEA..... | A-68 | 6Y01-6-8C..... | C-36 | 6YHLX-4-3C-PL-LH.... | A-32, B-47 | C09-125-1680..... | D-17 |
| 6AYNX-6-4C..... | A-26, B-50 | 6Y01-9-12C..... | C-36 | 6YHLX-6-3C-PL..... | A-32, B-47 | C10-115-1202..... | D-12 |
| 6AYWX-10-5C-55..... | A-52, B-57 | 6Y01-9-16C..... | C-36 | 6YHLX-6-3C-PL-LH.... | A-32, B-47 | C10-115-1222..... | D-12 |
| 6C95X-16-8C..... | A-42, B-13 | 6Y01-9-2C..... | C-36 | 6YHLX-9-5C-PL..... | A-32, B-47 | C10-115-1401..... | D-12 |
| 6C95X-25-12C..... | A-42, B-13 | 6Y01-9-4C..... | C-36 | 6YHLX-9-5C-PL-LH.... | A-32, B-47 | C10-115-1402..... | D-12 |
| 6C9LX-16-8C..... | A-18, A-34, A-36, B-42 | 6Y01-9-6C..... | C-36 | 6YMWX-6-5C-55..... | A-52, B-57 | C10-115-1404..... | D-12 |
| 6C9LX-25-12C..... | A-30, A-34, A-36, B-42 | 6Y01-9-8C..... | C-36 | 6YY5-4-12C..... | C-12 | C10-115-1422..... | D-12 |
| 6C9LX-30-16C..... | A-34, A-36, B-42 | 6Y02-4-12C..... | C-35 | 6YY5-4-16C..... | C-12 | C10-115-1452..... | D-12 |
| 6D9NX-8-8-PL..... | B-50 | 6Y02-4-16C..... | C-35 | 6YY5-4-4C..... | C-12 | C10-115-1454..... | D-12 |
| 6EZAX-5-2A..... | A-16, B-23 | 6Y02-4-2C..... | C-35 | 6YY5-4-6C..... | C-12 | C10-115-6202..... | D-13 |
| 6HB5X-32-32C-TC-10K..... | A-60, A-66, B-58 | 6Y02-4-4C..... | C-35 | 6YY5-4-9C..... | C-12 | C10-115-6204..... | D-13 |
| 6HB5X-32-32C-TC-FLG-10K..... | A-60, A-66, B-58 | 6Y02-4-6C..... | C-35 | 6YY5-6-12C..... | C-12 | C10-115-6401..... | D-13 |
| 6HB5X-32-32-TC..... | A-60, A-66, B-58 | 6Y02-4-8C..... | C-35 | 6YY5-6-16C..... | C-12 | C10-115-6402..... | D-13 |
| 6HB5X-32-32-TC-FLG..... | A-60, A-66, B-58 | 6Y02-6-12C..... | C-35 | 6YY5-6-4C..... | C-12 | C10-115-6404..... | D-13 |
| 6HB5X-41-32-TC..... | A-60, A-66, B-58 | 6Y02-6-16C..... | C-35 | 6YY5-6-6C..... | C-12 | C10-115-6452..... | D-13 |
| 6HB5X-41-32-TC-FLG..... | A-60, A-66, B-58 | 6Y02-6-2C..... | C-35 | 6YY5-6-9C..... | C-12 | C10-115-6454..... | D-13 |
| 6HE5X-32-24-FLATTC..... | A-58, B-59 | 6Y02-6-4C..... | C-35 | 6YY5-9-12C..... | C-12 | C10-116-1202..... | D-14 |
| 6HE5X-32-24-SEGTC..... | A-58 | 6Y02-6-6C..... | C-35 | 6YY5-9-16C..... | C-12 | C10-116-1222..... | D-14 |
| 6HE5X-32-32-FLATTC..... | A-60, A-66, B-59 | 6Y02-6-8C..... | C-35 | 6YY5-9-4C..... | C-12 | C10-116-1402..... | D-14 |
| 6HE5X-32-32-SEGTC..... | A-60, A-66, B-59 | 6Y02-9-12C..... | C-35 | 6YY5-9-6C..... | C-12 | C10-116-1422..... | D-14 |
| 6HELX-16-16-HCL..... | A-36, B-43 | 6Y02-9-16C..... | C-35 | 6YY5-9-9C..... | C-12 | C10-116-5202..... | D-15 |
| 6HN5X-32-24-TC..... | A-58, B-61 | 6Y02-9-2C..... | C-35 | 6YY6-4-6C..... | C-21 | C10-116-6202..... | D-15 |
| 6HN5X-32-32-TC..... | A-60, A-66, B-61 | 6Y02-9-4C..... | C-35 | 6YY6-4-9C..... | C-21 | C10-116-6402..... | D-15 |
| 6HNLX-16-16-HCL..... | A-36, B-43 | 6Y02-9-6C..... | C-35 | 6YY6-6-4C..... | C-21 | C10-125-1202..... | D-16 |
| 6HYLX-4-2AC-PL..... | A-32, B-44 | 6Y02-9-8C..... | C-35 | 6YY6-6-9C..... | C-21 | C10-125-5202..... | D-16 |
| 6HYLX-4-2AC-PL-LH .. | A-32, B-44 | 6Y25X-12-8C..... | A-42, B-13 | 6YY6-9-4C..... | C-21 | C10-125-6202..... | D-16 |
| 6HYLX-4-3C-PL..... | A-32, B-44 | 6Y25X-16-12C..... | A-42, B-13 | 6YY6-9-6C..... | C-21 | C19-950-0029..... | D-17 |
| 6HYLX-4-3C-PL-LH.... | A-32, B-44 | 6Y25X-9-8C..... | A-42, B-13 | 6YY6-9-9C..... | C-21 | C19-950-0062..... | D-17 |
| 6HYLX-6-3C-PL..... | A-32, B-44 | 6Y2HX-9-5C-THD..... | A-32, B-35 | 6ZEAX-5-2A..... | A-16, B-22 | C19-950-0064..... | D-17 |
| 6HYLX-6-3C-PL-LH.... | A-32, B-44 | 6Y2HX-9-5C-LONG..... | A-32, B-35 | 80C-F08W..... | E-3 | C19-950-1600..... | D-17 |
| 6HYLX-9-5C-PL..... | B-44 | 6Y2LX-12-5C..... | A-32, B-45 | 80C-G03..... | E-3 | C19-950-1601..... | D-17 |
| 6HYLX-9-5C-PL-LH.... | A-32, B-44 | 6Y2LX-12-8C..... | A-34, A-36, B-45 | 80C-G04..... | E-3 | C19-950-1602..... | D-17 |
| 6HYPL-1-2..... | A-16, B-51 | 6Y2LX-16-12C... A-34, A-36, B-45 | | 80C-G06..... | E-3 | C19-950-1622..... | D-17 |
| 6Y01-4-12C..... | C-36 | 6Y2LX-16-12C... A-34, A-36, B-45 | | 80C-HP3..... | E-3 | C19-950-1623..... | D-17 |
| 6Y01-4-16C..... | C-36 | 6Y2LX-9-5C..... | A-32, B-45 | 80C-HP4..... | E-3 | C19-950-1680..... | D-17 |
| 6Y01-4-2C..... | C-36 | 6Y2LX-9-6C..... | A-36, B-45 | 80C-HP6..... | E-3 | CV5Y-4C-20..... | C-48 |
| 6Y01-4-4C..... | C-36 | 6Y2LX-9-8C..... | A-34, A-36, B-45 | 83C-9X04..... | E-3 | CV5Y-6C-20..... | C-48 |
| 6Y01-4-6C..... | C-36 | 6Y4C-CAP..... | C-25 | 83C-9X08..... | E-3 | CV6Y-4C-60..... | C-50 |
| 6Y01-4-8C..... | C-36 | 6Y4HX-9-5C-XLT..... | A-44, B-35 | 83C-9X16..... | E-3 | CV6Y-6C-60..... | C-50 |
| 6Y01-6-12C..... | C-36 | 6Y4LX-4-2AC..... | A-32, B-46 | 83C-F16W..... | E-3 | CV6Y-9C-60..... | C-50 |
| 6Y01-6-16C..... | C-36 | 6Y4LX-6-2AC..... | A-32, B-46 | AV5Y-12C-20..... | C-47 | E206JCC3..... | A-30, B-29 |
| 6Y01-6-1C..... | C-36 | 6Y4LX-6-3C..... | A-32, B-46 | AV5Y-16C-20..... | C-47 | E206JEC3..... | A-30, B-29 |
| 6Y01-6-2C..... | C-36 | 6Y4LX-9-3C..... | A-32, B-46 | AV5Y-4C-20..... | C-47 | E213JFC4..... | A-30, B-29 |
| 6Y01-6-4C..... | C-36 | 6Y4WX-16-8C..... | A-48, B-57 | AV5Y-6C-20..... | C-47 | E220JHC1..... | A-30, B-29 |
| 6Y01-6-6C..... | C-36 | 6Y4WX-9-5C-55..... | A-52, B-57 | AV5Y-9C-20..... | C-47 | E225JIC3..... | A-30, B-29 |
| 6Y01-6-8C..... | C-36 | 6Y6C-CAP..... | C-25 | AV6Y-4C-30..... | C-49 | G214-245..... | E-3 |
| 6Y01-9-12C..... | C-36 | 6Y6Y-4-4C..... | C-22 | AV6Y-4C-60..... | C-49 | | |
| 6Y01-9-16C..... | C-36 | 6Y6Y-4-6C..... | C-22 | | | | |

Part Number Index

| | | | | | | | |
|-------------------|------------------|-----------------------|-----------------------|---------------------|-------------------|-------------------|------------|
| G214-250..... | E-3 | HP010-2-A12..... | D-10 | | A-48, E-3 | T5Y-6C..... | C-17 |
| HAHM4BM4..... | D-17 | HP010-2-A16..... | D-10 | MCGHS15-20..... | A-36, A-44, | T5Y-9C..... | C-17 |
| HBPHM4-B..... | C-24 | HP010-2-NFD..... | D-10 | | A-48, E-3 | T6Y-4C..... | C-23 |
| HBPHM6-B..... | C-24 | HP010-2-NMD..... | D-10 | MCGHS20-30.... | A-30, A-34, A-36, | T6Y-6C..... | C-23 |
| HBPHM9-B..... | C-24 | HP010-2-X23..... | D-10 | | A-42, E-3 | T6Y-9C..... | C-23 |
| HBPLM12-B..... | C-19 | HP-3..... | A-55, A-56 | MCGHS30-40.... | A-30, A-34, A-36, | TFTF-8-8..... | B-64 |
| HBPLM16-B..... | C-19 | HP-4..... | A-55, A-56 | | A-42, E-3 | TFTF-8-9..... | B-64 |
| HBPLM4-B..... | C-19 | HP-6..... | A-55, A-56 | MCGHS3295-SS..... | A-58, A-60, | TFTF-9-9..... | B-64 |
| HBPLM6-B..... | C-19 | HP8-3..... | A-55, A-56 | | A-66, E-3 | TMCAP-8..... | B-64 |
| HBPLM9-B..... | C-19 | HP8-4..... | A-55, A-56 | MCGHS40-50..... | E-3 | TMCAP-9..... | B-64 |
| HDT4500-48A.... | A-58, A-60, A-66 | HP8-6..... | A-55, A-56 | MCGHS50-60..... | E-3 | TV15Y-12C-20..... | C-48 |
| HP006-0-A12..... | D-5 | HPG3-12K..... | A-56 | MHBS012..... | A-44, A-48, E-4 | TV15Y-16C-20..... | C-48 |
| HP006-0-A9..... | D-5 | HPG3-12K-ORG..... | A-56 | MHBS016..... | A-44, A-48, E-4 | TV15Y-4C-20..... | C-48 |
| HP006-0-HM4..... | D-5 | HPG3-23K..... | A-56 | MHDC010..... | A-26, A-30, A-36, | TV15Y-6C-20..... | C-48 |
| HP006-0-HM9..... | D-5 | HPG3-23K-ORG..... | A-56 | | A-40, A-44, E-2 | TV15Y-9C-20..... | C-48 |
| HP006-0-LM6..... | D-5 | HPG4-12K..... | A-56 | MHDC012..... | A-24, A-26, A-28, | TV16Y-4C-30..... | C-50 |
| HP006-0-NFB..... | D-5 | HPG4-12K-ORG..... | A-56 | | A-40, A-44, E-2 | TV16Y-4C-60..... | C-50 |
| HP006-0-NFC..... | D-5 | HPG4-23K..... | A-56 | MHDC016..... | A-30, A-48, E-2 | TV16Y-6C-30..... | C-50 |
| HP006-0-NMB..... | D-5 | HPG4-23K-ORG..... | A-56 | MHDC018..... | A-18, A-28, A-34, | TV16Y-6C-60..... | C-50 |
| HP006-0-NMC..... | D-5 | HPG6-12K..... | A-56 | | A-36, A-42, E-2 | TV16Y-9C-30..... | C-50 |
| HP006-0-NMD..... | D-5 | HPG6-12K-ORG..... | A-56 | MHDC024..... | A-30, A-42, E-2 | TV16Y-9C-60..... | C-50 |
| HP006-0-X13..... | D-5 | HPG6-23K..... | A-56 | MHDC026..... | A-34, A-36, E-2 | TV25Y-12C-20..... | C-47 |
| HP006-1-A12..... | D-6 | HPG6-23K-ORG..... | A-56 | MK022-03-038..... | E-3 | TV25Y-16C-20..... | C-47 |
| HP006-1-A9..... | D-6 | HPK-HS-8..... | B-64 | MK022-03-039..... | E-3 | TV25Y-4C-20..... | C-47 |
| HP006-1-HM4..... | D-6 | HPK-HSP-8..... | B-64 | MK022-03-041..... | E-3 | TV25Y-6C-20..... | C-47 |
| HP006-1-LM6..... | D-6 | KCGL40-316-ACL40..... | C-25 | MK022-03-042..... | E-3 | TV25Y-9C-20..... | C-47 |
| HP006-1-LM9..... | D-6 | KCGL60-316-ACL60..... | C-25 | MK022-03-043..... | E-3 | TV26Y-4C-30..... | C-49 |
| HP006-1-NMB..... | D-6 | KCHL90-316-ACL90..... | C-25 | MK022-03-045..... | E-3 | TV26Y-4C-60..... | C-49 |
| HP006-1-NMC..... | D-6 | L5Y-12C..... | C-17 | MSG060..... | E-2 | TV26Y-6C-30..... | C-49 |
| HP006-1-NMD..... | D-6 | L5Y-16C..... | C-17 | MSG2006..... | E-2 | TV26Y-6C-60..... | C-49 |
| HP006-1-X13..... | D-6 | L5Y-4C..... | C-17 | MSG2106..... | A-26, E-2 | TV26Y-9C-30..... | C-49 |
| HP006-2-A12..... | D-7 | L5Y-6C..... | C-17 | MSG4113..... | A-18, A-34, E-2 | TV26Y-9C-60..... | C-49 |
| HP006-2-A9..... | D-7 | L5Y-9C..... | C-17 | MSG4120..... | A-34, A-36, E-2 | TV26Y-9C-60..... | C-49 |
| HP006-2-HM4..... | D-7 | L6Y-4C..... | C-23 | MSG4125..... | A-34, A-36, E-2 | X5Y-12C..... | C-17 |
| HP006-2-LM6..... | D-7 | L6Y-6C..... | C-23 | MTM04T..... | E-4 | X5Y-16C..... | C-17 |
| HP006-2-NFB..... | D-7 | L6Y-9C..... | C-23 | PVC-BLUE-012..... | E-2 | X5Y-4C..... | C-17 |
| HP006-2-NFC..... | D-7 | M55STIF4..... | A-44, A-48 | PVC-BLUE-016..... | E-2 | X5Y-6C..... | C-17 |
| HP006-2-NMB..... | D-7 | M55STIF-4..... | E-4 | PVC-BLUE-018..... | E-2 | X5Y-9C..... | C-17 |
| HP006-2-NMC..... | D-7 | M55STIF-5..... | E-4 | PVC-BLUE-024..... | E-2 | X6Y-4C..... | C-23 |
| HP006-2-NMD..... | D-7 | M55STIF-6..... | A-44, A-48 | PVC-ORANGE-012..... | E-2 | X6Y-6-9C..... | C-21 |
| HP006-2-X13..... | D-7 | M55STIF-6..... | E-4 | PVC-ORANGE-016..... | E-2 | X6Y-6C..... | C-23 |
| HP010-0-A12..... | D-8 | MBR003..... | A-12, E-2 | SV5Y-12C-20..... | C-47 | X6Y-9C..... | C-23 |
| HP010-0-A16..... | D-8 | MBR004..... | A-12, E-2 | SV5Y-16C-20..... | C-47 | Y204-0275C..... | C-19, C-25 |
| HP010-0-LM12..... | D-8 | MBR008..... | A-16, A-18, E-2 | SV5Y-4C-20..... | C-47 | Y204-0300C..... | C-19, C-25 |
| HP010-0-NFD..... | D-8 | MBR010..... | A-26, E-2 | SV5Y-6C-20..... | C-47 | Y204-0400C..... | C-19, C-25 |
| HP010-0-NMD..... | D-8 | MBR012..... | A-24, E-2 | SV5Y-9C-20..... | C-47 | Y204-0600C..... | C-19, C-25 |
| HP010-0-X23..... | D-8 | MBR013-B..... | A-48 | SV6Y-4C-30..... | C-49 | Y204-0800C..... | C-19, C-25 |
| HP010-1-A12..... | D-9 | MCG001SS..... | A-16, A-24, A-26, | SV6Y-4C-60..... | C-49 | Y204-1000C..... | C-19, C-25 |
| HP010-1-A16..... | D-9 | | A-30, A-36, A-40, | SV6Y-6C-30..... | C-49 | Y204-1200C..... | C-19, C-25 |
| HP010-1-LM12..... | D-9 | | A-44, E-3 | SV6Y-6C60..... | C-49 | Y206-0300C..... | C-19, C-25 |
| HP010-1-LM9..... | D-9 | MCG002SS.. | A-30, A-34, A-36, E-3 | SV6Y-9C-30..... | C-49 | Y206-0400C..... | C-19, C-25 |
| HP010-1-NMD..... | D-9 | MCG003SS.. | A-30, A-34, A-36, E-3 | SV6Y-9C-60..... | C-49 | Y206-0600C..... | C-19, C-25 |
| HP010-1-X23..... | D-9 | MCG005SS..... | A-18, A-30 | T5Y-12C..... | C-17 | Y206-0800C..... | C-19, C-25 |
| | | MCGHS10-15.... | A-16, A-24, A-26, | T5Y-16C..... | C-17 | Y206-1000C..... | C-19, C-25 |
| | | | A-36, A-40, A-44, | T5Y-4C..... | C-17 | Y206-1200C..... | C-19, C-25 |

For detailed ordering information, please consult price list or contact Parflex Division.

Part Number Index

| | | | | | | | |
|------------------|------------|------------------|------|------------------|------|------------------|------|
| Y209-0400C..... | C-19, C-25 | Y503-12-6C..... | C-44 | Y603-4-4C..... | C-44 | YA6C-PLUG..... | C-9 |
| Y209-0600C..... | C-19, C-25 | Y503-12-8C..... | C-44 | Y603-4-6C..... | C-44 | YA8C-PLUG..... | C-9 |
| Y209-0800C..... | C-19, C-25 | Y503-16-12C..... | C-44 | Y603-4-8C..... | C-44 | YAD9-6-4C..... | C-8 |
| Y209-1000C..... | C-19, C-25 | Y503-16-16C..... | C-44 | Y603-6-4C..... | C-44 | YAD9-6-6C..... | C-8 |
| Y209-1200C..... | C-19, C-25 | Y503-4-8C..... | C-44 | Y603-6-6C..... | C-44 | YAD9-6-8C..... | C-8 |
| Y212-0400C..... | C-19 | Y503-9-10C..... | C-44 | Y603-6-8C..... | C-44 | YAY1-11-16C..... | C-9 |
| Y212-0600C..... | C-19 | Y503-9-12C..... | C-44 | Y603-9-6C..... | C-44 | YAY1-16-16C..... | C-9 |
| Y212-0800C..... | C-19 | Y503-9-16C..... | C-44 | Y603-9-8C..... | C-44 | YAY1-8-16C..... | C-9 |
| Y212-1000C..... | C-19 | Y5D9-4-4C..... | C-14 | Y6D9-4-6C..... | C-22 | YAY2-11-16C..... | C-9 |
| Y212-1200C..... | C-19 | Y5D9-6-4C..... | C-14 | Y6D9-6-6C..... | C-22 | YAY2-16-16C..... | C-9 |
| Y216-0600C..... | C-19 | Y5D9-6-6C..... | C-14 | Y6TF-6-8..... | B-64 | YAY2-8-16C..... | C-9 |
| Y216-0800C..... | C-19 | Y5D9-9-6C..... | C-14 | Y6TF-9-8..... | B-64 | YAY5-11-12C..... | C-8 |
| Y216-1000C..... | C-19 | Y5Y5-12-12C..... | C-12 | Y6Y6-4-4C..... | C-21 | YAY5-11-4C..... | C-8 |
| Y216-1200C..... | C-19 | Y5Y5-12-16C..... | C-12 | Y6Y6-4-6C..... | C-21 | YAY5-11-6C..... | C-8 |
| Y2C-12C..... | C-18 | Y5Y5-12-6C..... | C-14 | Y6Y6-4-9C..... | C-21 | YAY5-11-9C..... | C-8 |
| Y2C-16C..... | C-18 | Y5Y5-16-16C..... | C-12 | Y6Y6-6-6C..... | C-21 | YAY5-16-12C..... | C-8 |
| Y2C-4C..... | C-18 | Y5Y5-4-12C..... | C-12 | Y6Y6-6-9C..... | C-21 | YAY5-16-9C..... | C-8 |
| Y2C-6C..... | C-18 | Y5Y5-4-16C..... | C-12 | Y6Y6-9-9C..... | C-21 | YAY5-6-12C..... | C-8 |
| Y2C-9C..... | C-18 | Y5Y5-4-4C..... | C-12 | YA01-11-12C..... | C-30 | YAY5-6-4C..... | C-8 |
| Y2N-12C..... | C-18 | Y5Y5-4-6C..... | C-12 | YA01-11-16C..... | C-30 | YAY5-6-6C..... | C-8 |
| Y2N-16C..... | C-18 | Y5Y5-4-9C..... | C-12 | YA01-11-6C..... | C-30 | YAY5-6-9C..... | C-8 |
| Y2N-4C..... | C-18 | Y5Y5-6-12C..... | C-12 | YA01-11-8C..... | C-30 | YAY5-8-12C..... | C-8 |
| Y2N-6C..... | C-18 | Y5Y5-6-16C..... | C-12 | YA01-16-12C..... | C-30 | YAY5-8-4C..... | C-8 |
| Y2N-9C..... | C-18 | Y5Y5-6-6C..... | C-12 | YA01-16-16C..... | C-30 | YAY5-8-6C..... | C-8 |
| Y4C-4C..... | C-24 | Y5Y5-6-9C..... | C-12 | YA01-16-20C..... | C-30 | YAY5-8-9C..... | C-8 |
| Y4C-6C..... | C-24 | Y5Y5-9-12C..... | C-12 | YA01-16-24C..... | C-30 | YAY6-10-6C..... | C-7 |
| Y4C-9C..... | C-24 | Y5Y5-9-16C..... | C-12 | YA01-16-32C..... | C-30 | YAY6-10-9C..... | C-7 |
| Y4N-4C..... | C-24 | Y5Y5-9-9C..... | C-12 | YA01-16-8C..... | C-30 | YAY6-11-9C..... | C-7 |
| Y4N-6C..... | C-24 | Y5Y6-12-4C..... | C-14 | YA01-6-12C..... | C-30 | YAY6-6-4C..... | C-7 |
| Y4N-9C..... | C-24 | Y5Y6-12-9C..... | C-14 | YA01-6-16C..... | C-30 | YAY6-6-6C..... | C-7 |
| Y501-12-12C..... | C-33 | Y5Y6-16-4C..... | C-14 | YA01-6-2C..... | C-30 | YAY6-6-9C..... | C-7 |
| Y501-12-16C..... | C-33 | Y5Y6-16-6C..... | C-14 | YA01-6-4C..... | C-30 | YAY6-8-6C..... | C-7 |
| Y501-12-2C..... | C-33 | Y5Y6-16-9C..... | C-14 | YA01-6-6C..... | C-30 | YAY6-8-9C..... | C-7 |
| Y501-12-4C..... | C-33 | Y5Y6-4-4C..... | C-14 | YA01-6-8C..... | C-30 | YAYA-10-10C..... | C-7 |
| Y501-12-6C..... | C-33 | Y5Y6-4-6C..... | C-14 | YA01-6-8C..... | C-30 | YAYA-10-6C..... | C-7 |
| Y501-12-8C..... | C-33 | Y5Y6-4-9C..... | C-14 | YA01-8-12C..... | C-30 | YAYA-11-10C..... | C-7 |
| Y501-16-12C..... | C-33 | Y5Y6-6-4C..... | C-14 | YA01-8-16C..... | C-30 | YAYA-11-11C..... | C-7 |
| Y501-16-16C..... | C-33 | Y5Y6-6-6C..... | C-14 | YA01-8-4C..... | C-30 | YAYA-11-8C..... | C-7 |
| Y501-16-2C..... | C-33 | Y5Y6-6-9C..... | C-14 | YA01-8-6C..... | C-30 | YAYA-16-11C..... | C-7 |
| Y501-16-4C..... | C-33 | Y5Y6-9-4C..... | C-14 | YA01-8-8C..... | C-30 | YAYA-16-16C..... | C-7 |
| Y501-16-6C..... | C-33 | Y5Y6-9-6C..... | C-14 | YA02-11-12C..... | C-29 | YAYA-6-6C..... | C-7 |
| Y501-16-8C..... | C-33 | Y5Y6-9-9C..... | C-14 | YA02-11-8C..... | C-29 | YAYA-8-6C..... | C-7 |
| Y501-4-4C..... | C-33 | Y601-4-12C..... | C-37 | YA02-16-16C..... | C-29 | YAYA-8-8C..... | C-7 |
| Y501-4-8C..... | C-33 | Y601-4-2C..... | C-37 | YA02-6-16C..... | C-29 | YTTF-10-8..... | B-64 |
| Y501-6-4C..... | C-33 | Y601-4-4C..... | C-37 | YA02-6-4C..... | C-29 | YTTF-10-9..... | B-64 |
| Y501-6-6C..... | C-33 | Y601-4-6C..... | C-37 | YA02-6-8C..... | C-29 | YTTF-12-8..... | B-64 |
| Y501-6-8C..... | C-33 | Y601-4-8C..... | C-37 | YA02-8-12C..... | C-29 | YTTF-12-9..... | B-64 |
| Y501-9-12C..... | C-33 | Y601-6-4C..... | C-37 | YA02-8-4C..... | C-29 | YTTF-6-8..... | B-64 |
| Y501-9-16C..... | C-33 | Y601-6-6C..... | C-37 | YA02-8-6C..... | C-29 | YTTF-9-8..... | B-64 |
| Y501-9-2C..... | C-33 | Y601-6-8C..... | C-37 | YA02-8-8C..... | C-29 | YTTF-9-9..... | B-64 |
| Y501-9-4C..... | C-33 | Y601-9-12C..... | C-37 | YA03-11-6C..... | C-44 | | |
| Y501-9-6C..... | C-33 | Y601-9-16C..... | C-37 | YA03-16-12C..... | C-44 | | |
| Y501-9-8C..... | C-33 | Y601-9-4C..... | C-37 | YA03-16-8C..... | C-44 | | |
| Y503-12-12C..... | C-44 | Y601-9-6C..... | C-37 | YA11C-PLUG..... | C-9 | | |
| | | Y601-9-8C..... | C-37 | YA16C-PLUG..... | C-9 | | |



Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 1 800 C-Parker (1 800 272 7537)



Aerospace

Key Markets

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes



Climate Control

Key Markets

Agriculture
Air conditioning
Construction Machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves



Electromechanical

Key Markets

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydraulic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions



Filtration

Key Markets

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & dryers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings



Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors



Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors



Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical Instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves



Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration dampening

ENGINEERING YOUR SUCCESS.

Parker Fluid Connectors Group

North American Divisions & Distribution Service Centers

Your complete source for quality tube fittings, hose & hose fittings, brass & composite fittings, quick-disconnect couplings, valves and assembly tools, locally available from a worldwide network of authorized distributors.

Fittings:

Available in inch and metric sizes covering SAE, BSP, DIN, GAZ, JIS and ISO thread configurations, manufactured from steel, stainless steel, brass, aluminum, nylon and thermoplastic.

Hose, Tubing and Bundles:

Available in a wide variety of sizes and materials including rubber, wire-reinforced, thermoplastic, hybrid and custom compounds.

Worldwide Availability:

Parker operates Fluid Connectors manufacturing locations and sales offices throughout North America, South America, Europe and Asia-Pacific.

For information, call toll free...

**1-800-C-PARKER
(1-800-272-7537)**

North American Divisions

Fluid System Connectors Division

Otsego, MI
phone 269 694 9411
fax 269 694 4614

Hose Products Division

Wickliffe, OH
phone 440 943 5700
fax 440 943 3129

Industrial Hose Division

Wickliffe, OH
phone 440 883 2120
fax 440 833 2230

Parflex Division

Ravenna, OH
phone 330 296 2871
fax 330 296 8433

Quick Coupling Division

Minneapolis, MN
phone 763 544 7781
fax 763 544 3418

Tube Fittings Division

Columbus, OH
phone 614 279 7070
fax 614 279 7685

Distribution Service Centers

Buena Park, CA

phone 714 522 8840
fax 714 994 1183

Conyers, GA

phone 770 929 0330
fax 770 929 0230

Louisville, KY

phone 502 937 1322
fax 502 937 4180

Portland, OR

phone 503 283 1020
fax 503 283 2201

Toledo, OH

phone 419 878 7000
fax 419 878 7001
fax 419 878 7420
(FCG Kit Operations)

Canada

Grimsby, ONT

phone 905 945 2274
fax 905 945 3945
(Contact Grimsby for other Service Center locations.)

Mexico

Toluca, MEX

phone (52) 722 2754 200
fax (52) 722 2722 168

